



5 SNAP SWITCH

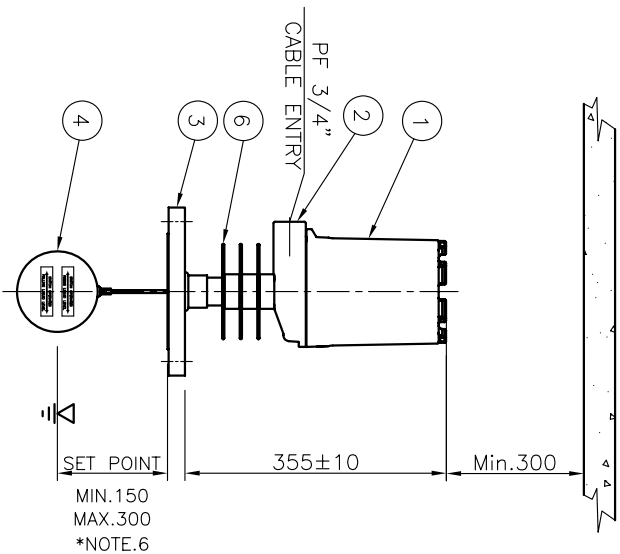

WIRING DIAGRAM

DESIGN DATA

CODE		KEPIC MGE & ASME B31.1		
UNIT		mm		
ENCLOSURE		Ex d IIC T6		SNAP SWITCH MAT'L
ORDERING CODE		PROCESS TEMP (CONTACT RATING)		
5	Max.400°C (1A 115V AC / 3A 28V DC)	PC, CERAMIC,304SS		
6	Max.550°C (5A 250V AC / 0.5A 125V DC)	PC, CERAMIC,304SS		
7	Max.450°C (1A 250V AC / 1A 30V DC)	PC, CERAMIC,304SS		
8	Max.550°C (15A 250V AC / 1A 125V DC)	PC, CERAMIC,304SS		
9	Max.450°C (1A 115V AC / 3A 28V DC)	PC, CERAMIC,304SS		
		HERMETICAL SEAL TYPE		

NOTES

- REFER TO INSTALLATION MANUAL WHEN YOU SET IT UP
- CABLE SIZE : MAX.14 AWG.
- DEAD BAND IS 15mm FIXEDLY
- HEAD ROOM OF 300mm MUST BE SECURED ABOVE THE HEAD FOR INSTALLATION / REMOVAL AND MAINTENANCE
- CABLE CONNECTION IN TERMINAL PART VIA CLAMPED RING TYPE
- IF SET POINT EXCEED 300mm, PLEASE CONTACT SEOJIN.

TOTAL Q'TY : - SETS

NO.	TAG NO.	FLUID(UPPER/LOWER)	OPPR. PRESS. MAX.(Barg)	OPPR. TEMP. MAX.(°C)	RATING	SET POINT	Q'TY
1	-	-	-	-	150#	150	- SETS

	OR	OPENS ON RISING LEVEL
	CR	CLOSES ON RISING LEVEL
	OF	OPENS ON FALLING LEVEL
	CF	CLOSES ON FALLING LEVEL
✓		SWITCH ACTION

REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED
△					
△					
△					
△					
△					

TITLE
VERTICAL FLOAT TYPE LEVEL SWITCH
SMC-75F-1-A-1-A-5-C-1
ASSEMBLY DRAWING

MANUFACTURER

Seojin Instech Co., Ltd.

SCALE	UNIT	REV.
N/S	SU-MO15-DWG-AP006-B	