

TH Series Atomize Pump



Power: 0.25 - 0.37 kW

50Hz

Pressure: Up to 30 kg/cm²

Flow: Up to 7.5 L/min

60Hz

Pressure: Up to 30 kg/cm²

Flow: Up to 8.5 L/min

Outlet: 1/4"

Applications

1. Household and industrial washing and cleaning.
2. High pressure water supplying.
3. Garden and agricultural chemicals spraying.
4. Hydraulic piping leakage testing.

Product Features

1. Portable compact design, easy to carry.
2. Easy operation, and maintenance.
3. High pressure discharge head, and large capacity.
4. Powerful electrical motor, high reliability.
5. Suitable for agricultural spraying.
6. Self priming suction function.

Maximum output pressure

1. TH400P - 30 kg/cm²
2. TH250P - 20 kg/cm²

Standard Accessories




1. Suction hose pipe with inlet filter.
2. High pressure hose (30 ft.)
3. Overflow hose.
4. Spray gun.

Optional Accessories



Hydraulic testing kit
(pressure gauge, valve and high pressure hose pipe).

Sprayer Components

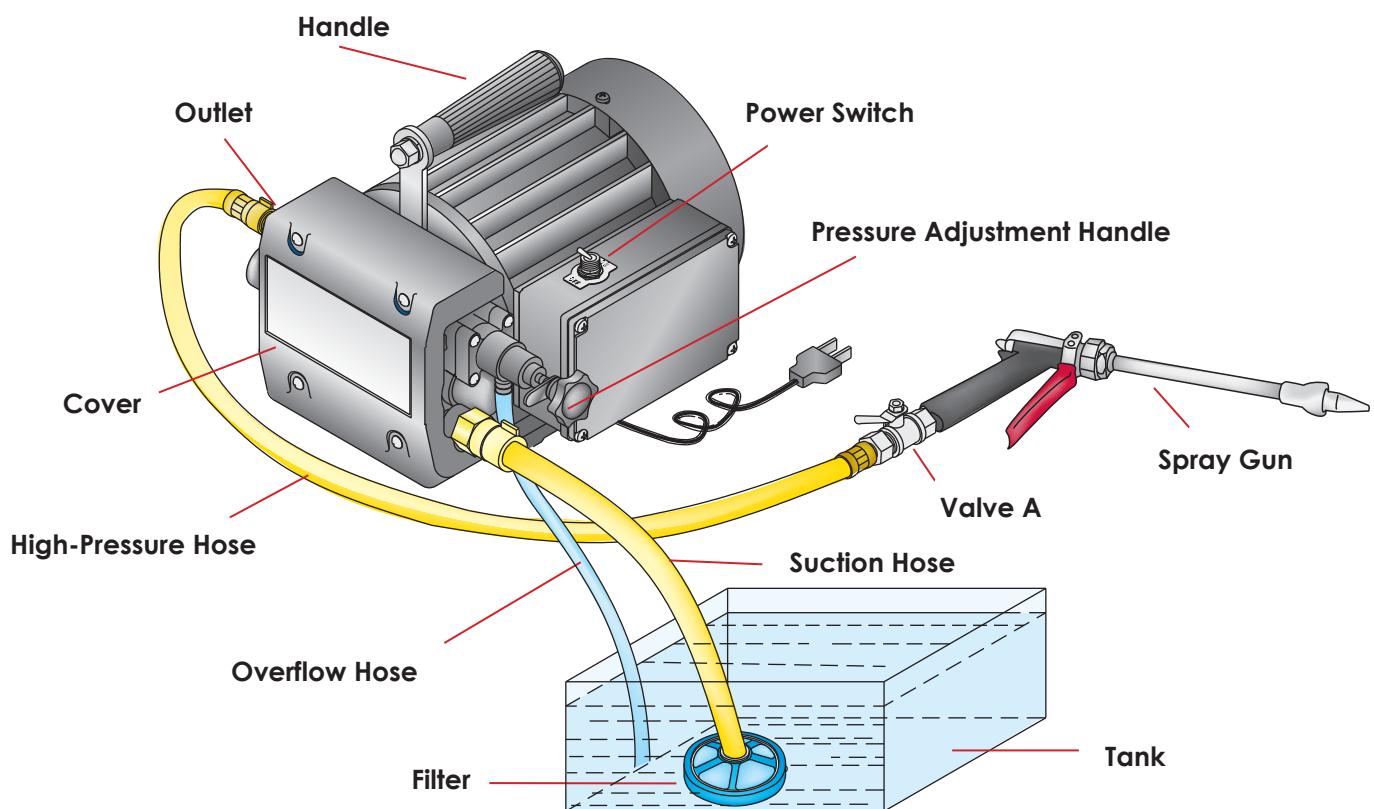

Specification, 50Hz

| Type | Output (kW) | Cycle Hz | Pole P | Voltage Single V | Pressure kg/cm ² | Capacity L/min | Box Outline L x W x H mm | Weight kg | ■■■■■ |
|--------|-------------|----------|--------|------------------|-----------------------------|----------------|--------------------------|-----------|-------|
| TH250P | 0.25 | 50 | 4 | 200 - 240 | 20 | 7.5 | 358 X 288 X 261 | 9.0 | 27 |
| TH400P | 0.37 | 50 | 4 | 200 - 240 | 30 | 7.5 | 358 X 288 X 261 | 13.2 | 27 |

Specification, 60Hz

| Type | Output (kW) | Cycle Hz | Pole P | Voltage Single V | Pressure kg/cm ² | Capacity L/min | Box Outline L x W x H mm | Weight kg | ■■■■■ |
|--------|-------------|----------|--------|------------------|-----------------------------|----------------|--------------------------|-----------|-------|
| TH250P | 0.25 | 60 | 4 | 110 or 220 | 20 | 8.5 | 358 X 288 X 261 | 9.0 | 27 |
| TH400P | 0.37 | 60 | 4 | 110 or 220 | 30 | 8.5 | 358 X 288 X 261 | 13.2 | 27 |