


Earthed Voltage Transformer (25.8kV)



- 옥내용
For Indoor
- 단상 접지형
Single Phase,
Line to Earth Voltage Transformer
- 일반 계기 및 보호계전기 용
For Metering & Protection
- Epoxy Mold로 절연특성 강화
Insulation : Epoxy Vacuum Molding.

Dimension & Drawing

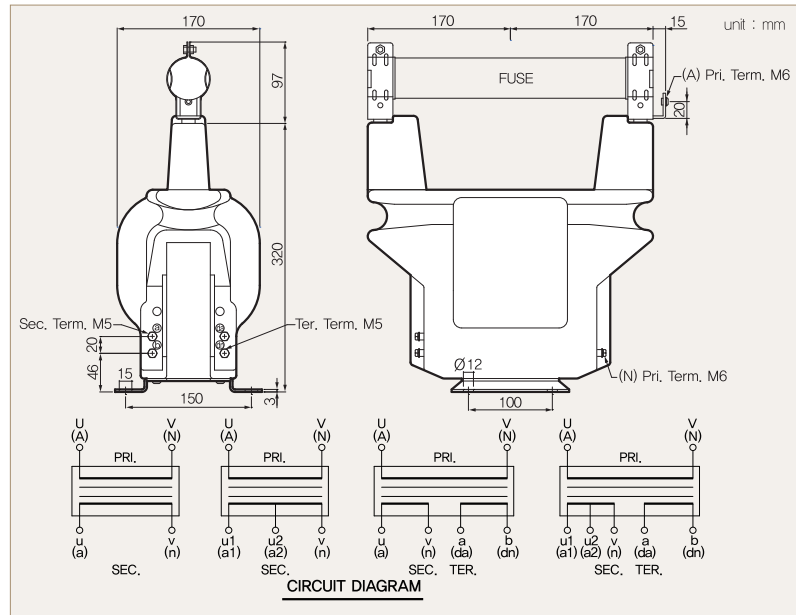

Specification

Standard	KS C 1706	JEC 1201	IEC 61869-3
Max. Voltage	25.8 kV	23 kV	24 kV
Primary Voltage	22900/ $\sqrt{3}$ V		
Secondary Voltage	110/ $\sqrt{3}$ or 190/ $\sqrt{3}$ V		
Tertiary Voltage(Residual winding)	—	110/3 or 190/3 V	110/3 or 190/3 V
Insulation Level	25.8 / 50 / 125 kV (20B)	23 / 50 / 125 kV	24 / 50 / 125 kV
Over Voltage Factor	1.1Vn Continuous / 1.9Vn(30min)		1.2Vn Continuous / 1.9Vn(30s) or 1.2Vn Continuous / 1.9Vn(8h)
Frequency	60 Hz (Others on request)		

※ 상기의 정격 1차, 2차 전압은 표준형이며, 그 외의 전압비의 제품도 생산 가능합니다.
Above rated primary and secondary voltage is standard type, and besides, can be manufacture the another voltage ratio products.

Rated Output

Accuracy Class			Type & Rated Output Burden			
KS C 1706	JEC 1201	IEC 61869-3	NE1F	NE1DF	NE1TF	NE1DTF
0.5	—	0.5	50	50	—	—
1.0	1P	1.0	100 or 200	100 or 200	—	—
3.0	3P	3.0	300	300	—	—
—	1P/3G	1.0 / 3P	—	—	100 / 200	100 / 200
—	—	1.0 / 3P	1.2Vn Continuous / 1.9Vn(8h)		—	50 / 100
Weight			≒ 26.0 kg			

1'ry / 2'ry Voltage : 생산 전압비 (Option)

1차 전압 (V)	2차 전압 (V)	3차 전압 (V)
13200/ $\sqrt{3}$, 16500/ $\sqrt{3}$, 22000/ $\sqrt{3}$, 22800/ $\sqrt{3}$, 22900/ $\sqrt{3}$	110/ $\sqrt{3}$, 120/ $\sqrt{3}$, 190/ $\sqrt{3}$	110/3, 190/3