


INSTALLATION DRAWING

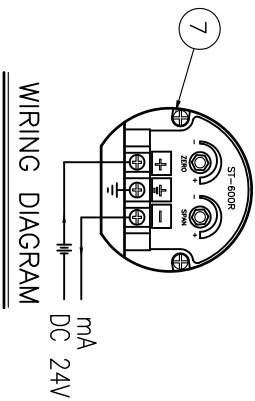

WIRING DIAGRAM

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	DESIGN	-	
	OPERATING	ATM	kg/Cm
PRESS.	DESIGN	-	kg/Cm
	OPERATING	-20 ~ 85 °C	
TEMP. (SENSOR)	DESIGN	-	
	OPERATING	-10 ~ 60 °C	
TEMP. (ELECTRONICS)	DESIGN	-	
	OPERATING	-	
MEASURING RANGE		Max 10 M	
SPECIFIC GRAVITY		More than 0.6	
MOISTURE		Max 95% RH	
INPUT POWER		Max 10 M	
OUTPUT		DIAL DISPLAY	
ACCURACY		±20mm	
MOUNTING SIZE		PF 2"	
LOOP IMPEDANCE		450 Ω (20V DC)	
CALIBRATION		ZERO & SPAN	

TAG NO.	L	L1	L2

NOTES

REVISION

NO	DESCRIPTION	MATERIAL	QTY	SPECIFICATION	REMARK
7	CONVERTER	ABS	1		
6	FLOAT	304SS	1		
5	SPRING	304SS	1		
4	WIRE	316SS	1		
3	FLANGE	304SS	1		
2	SCALE	AL	1		
1	BODY	ABS	1		

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-
TITLE	GEAR TYPE LIQUID LEVEL TRANSMITTER SQL-3-A-1-E-2-A ASSEMBLY DRAWING

△					
△					
△					
△					
△	FOR APPROVAL				
REV	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED

MANUFACTURER

Seojin Instech Co., Ltd.

SCALE

N/S

DATE

0000

REV

0000

WORK ORDER NO.

-

RELT

△