


Single Screw Weighing Feeder CE-S




Material example

- Pellet
- Resin powder
- Calcium carbonate
- Talc
- Titanium oxide
- Silica
- Carbon black



Product feature



Construction

Screw profile


OS Type
(mainly for powder and particles)




BS Type
(mainly for powder, particles and pellets)



Vertical twin screw axis type
(mainly for powder)



* For CE-S-1D, 2D only

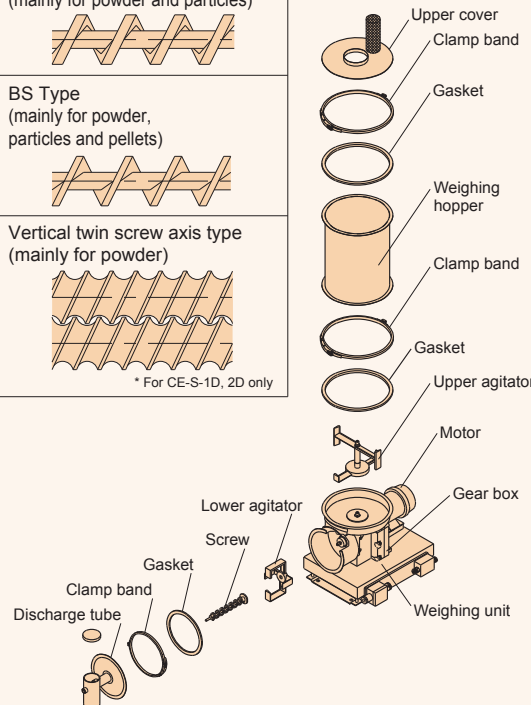

Feature


- Built-in countermeasure against difficult to handle materials such as TiO₂, Silica and carbon black.
- Flame explosion proof option is available.

Specifications

Model	Flow rate range	Hopper capacity	Weighing capacity	Feeder weight	Power supply
CE-S-1E CE-S-1E-MP	2- 300L/h	25L	30kg	Approx. 65kg Approx. 90kg	200-240 AC, 1 phase, 1.3 kVA
CE-S-2E CE-S-2E-MP		50L	30kg	Approx. 67kg Approx. 92kg	
CE-S-3E CE-S-3E-MP	50-1200L/h	100L	100kg	Approx.160kg Approx.210kg	200-240 AC, 1 phase, 3.1 kVA
CE-S-4E CE-S-4E-MP		200L	200kg	Approx.170kg Approx.220kg	

The models having "-MP" are feeder mounted panel type.

Dimensions

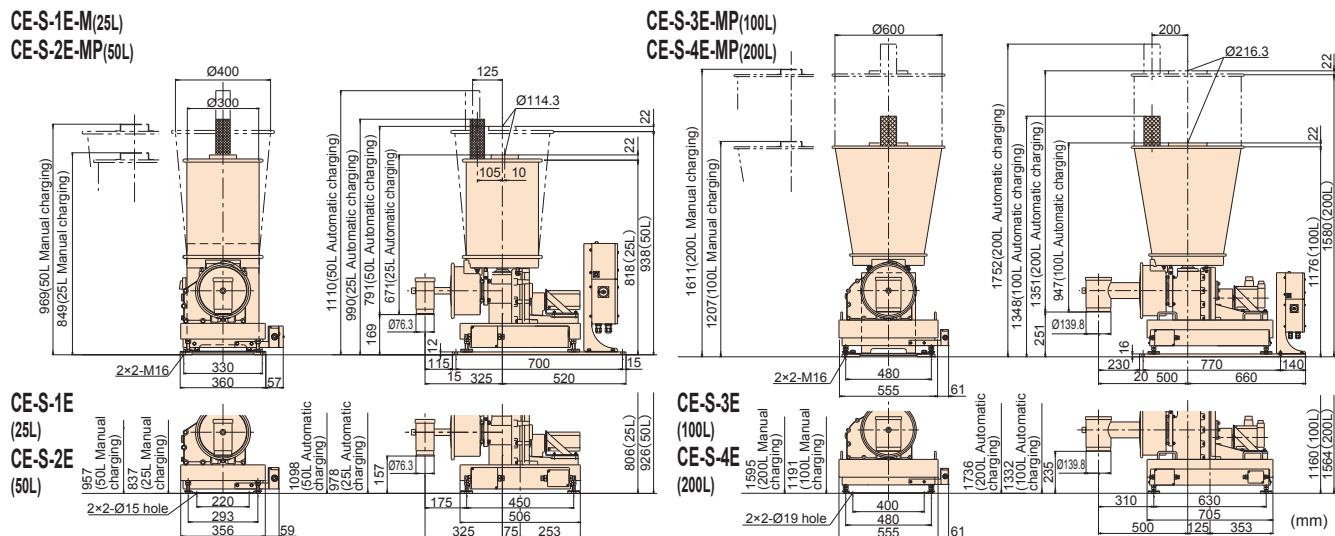


Single Screw Weighing Feeder CE-R




Material example

- Pellet
- Resin powder
- Calcium carbonate
- Talc
- Titanium oxide
- Silica
- Carbon black



Product feature



Construction

Screw profile


OS Type
(mainly for powder and particles)




BS Type
(mainly for powder, particles and pellets)



Vertical twin screw axis type
(mainly for powder)



* For CE-R-1D, 2D only

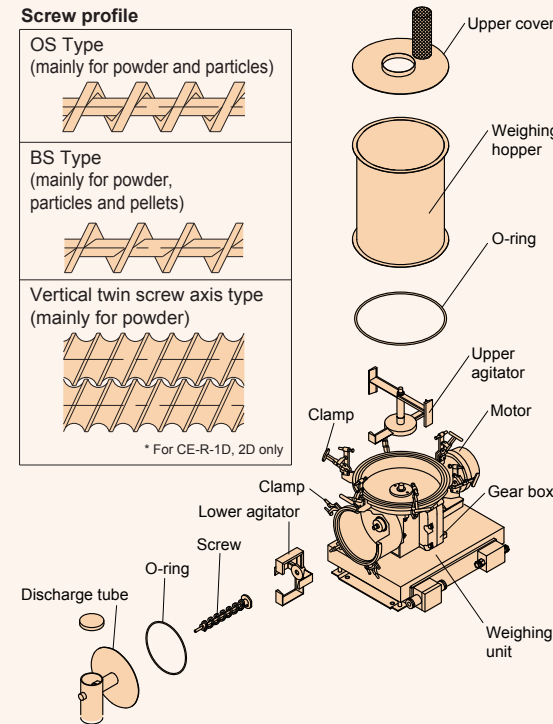

Feature

- Built-in countermeasure against difficult to handle materials such as TiO₂, Silica and carbon black.
- Applicable to fine powders with its high sealability.
- Flame explosion proof option is available.

Specifications

Model	Flow rate range	Hopper capacity	Weighing capacity	Feeder weight	Power supply
CE-R-1E CE-R-1E-MP	2- 300L/h	25L	30kg	Approx. 85kg Approx.110kg	200-240 AC, 1 phase, 1.3 kVA
CE-R-2E CE-R-2E-MP		50L	30kg	Approx. 90kg Approx.115kg	
CE-R-3E CE-R-3E-MP	50-1200L/h	100L	100kg	Approx.180kg Approx.230kg	200-240 AC, 1 phase, 3.1 kVA
CE-R-4E CE-R-4E-MP		200L	200kg	Approx.200kg Approx.250kg	

The models having "-MP" are feeder mounted panel type.

Dimensions

