

50HZ

GSG Sewage pump

Specifications



2-pole

Caliber (mm)	Type (model)	Output (KW)	Number of revolution (R.P.M)	Developed head (M)	Developed head pump output Q (m ³ /min)
50	2GSG0.75-2	0.75	2850	8	0.12
	2GSG1.5-2	1.5	2850	12	0.18
	2GSG2.2-2	2.2	2850	16	0.24
80	2GSG3.7-3	3.7	2850	16	0.4
80/100	2GSG5.5-3,4	5.5	2850	20	0.5
100	2GSG7.5-4	7.5	2850	24	0.65
	2GSG11-4	11	2850	28	0.8
	2GSG15-4	15	2850	32	0.96

4-pole

Caliber (mm)	Type (model)	Output (KW)	Number of revolution (R.P.M)	Developed head (M)	Developed head pump output Q (m ³ /min)
50	4GSG1.5-2	1.5	1450	7	0.18
	4GSG2.2-2	2.2	1450	8	0.24
80	4GSG3.7-3	3.7	1450	10	0.4
80/100	4GSG5.5-3,4	5.5	1450	11	0.5
100	4GSG7.5-4	7.5	1450	14	0.65
	4GSG11-4	11	1450	16	0.8
	4GSG15-4	15	1450	20	0.96

Performance Curve

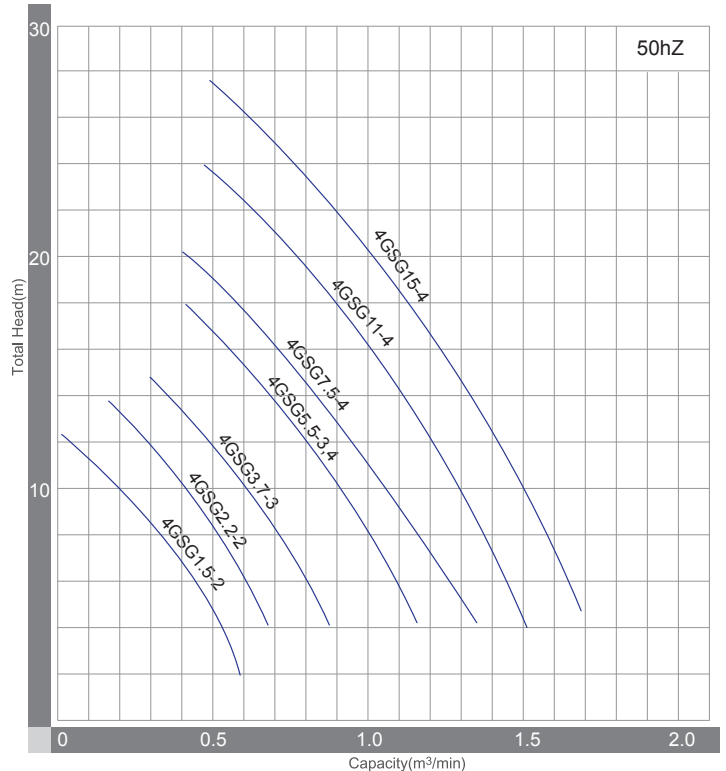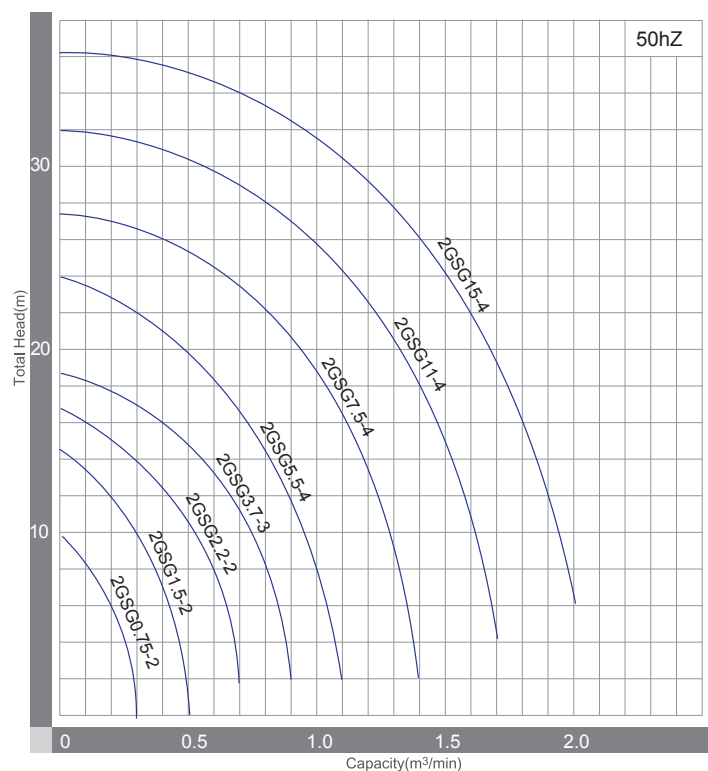

Dimension of pump

MODEL	A	B	C	D
2GSG0.75-2	422	364	195	167
2GSG1.5-2	422	364	195	167
2GSG2.2-2	472	364	195	167
2GSG3.7-2	581	481	243	238
2GSG5.5-3	660	481	243	238
2GSG7.5-4	750	600	320	288
2GSG11-4	750	600	320	288
2GSG15-4	750	600	320	288

MODEL	A	B	C	D
4GSG1.5-2	584	446	258	202
4GSG2.2-2	609	543	243	233
4GSG3.7-2	609	543	243	233
4GSG5.5-3,4	739	694	370	283
4GSG7.5-3	739	694	370	283
4GSG11-4	925	694	370	283
4GSG15-4	925	694	370	283

*상기 치수는 제작에 따라 다소 차이가 날 수 있습니다.

