



50HZ

GSAX Axial flow pump

Performance Curve

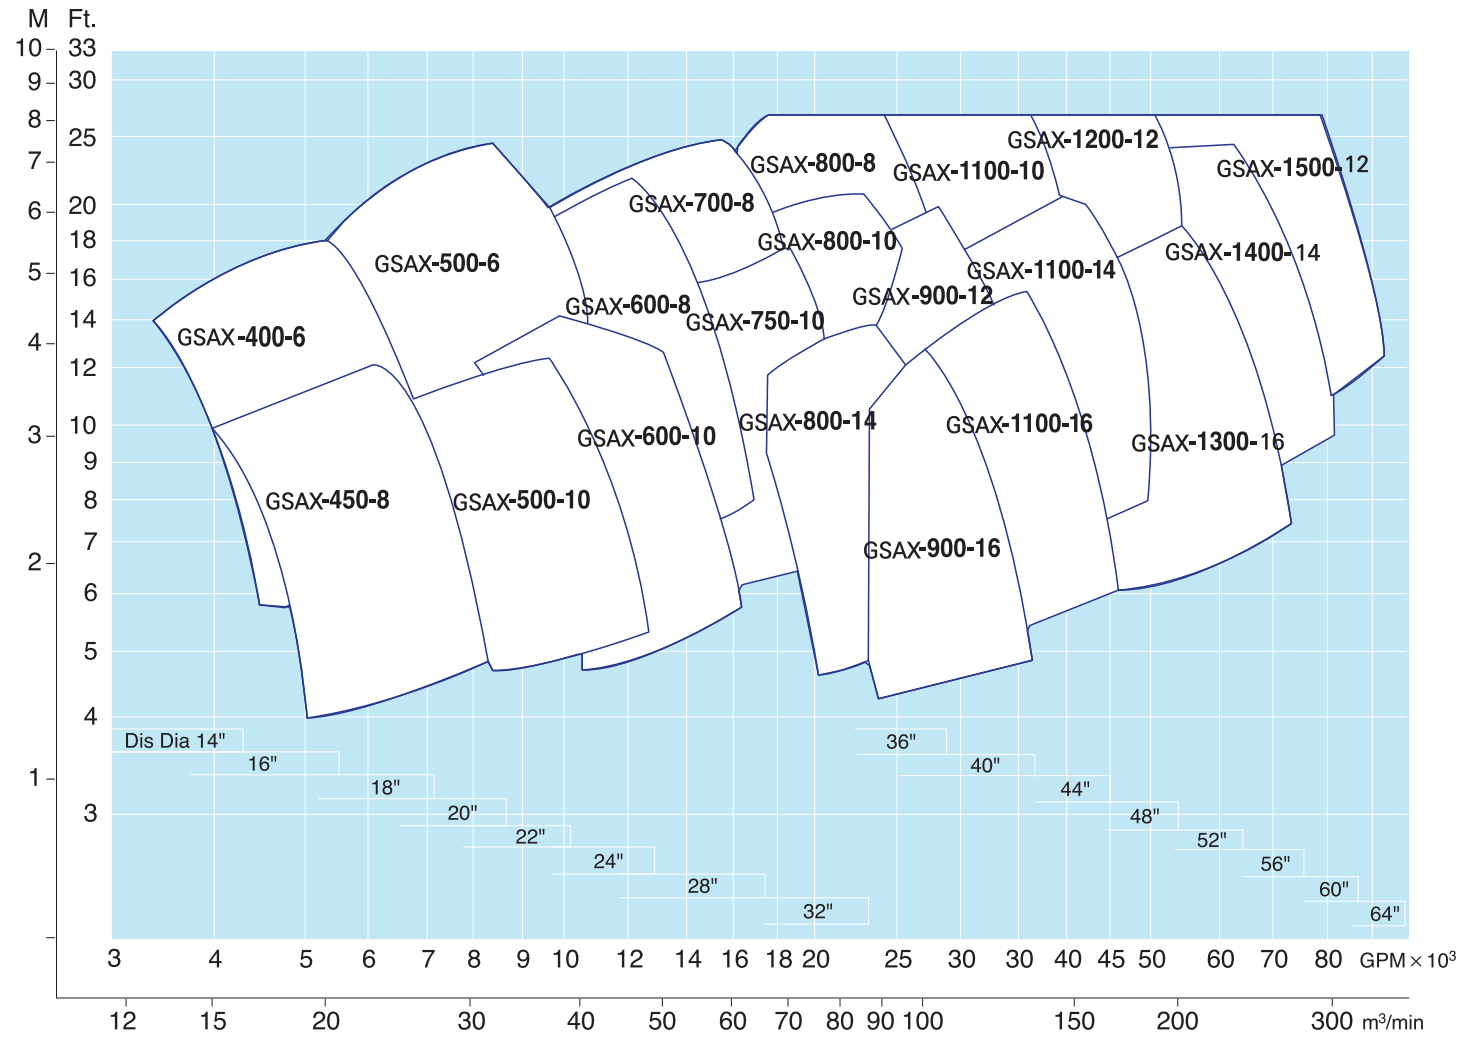

Dimension of Pump

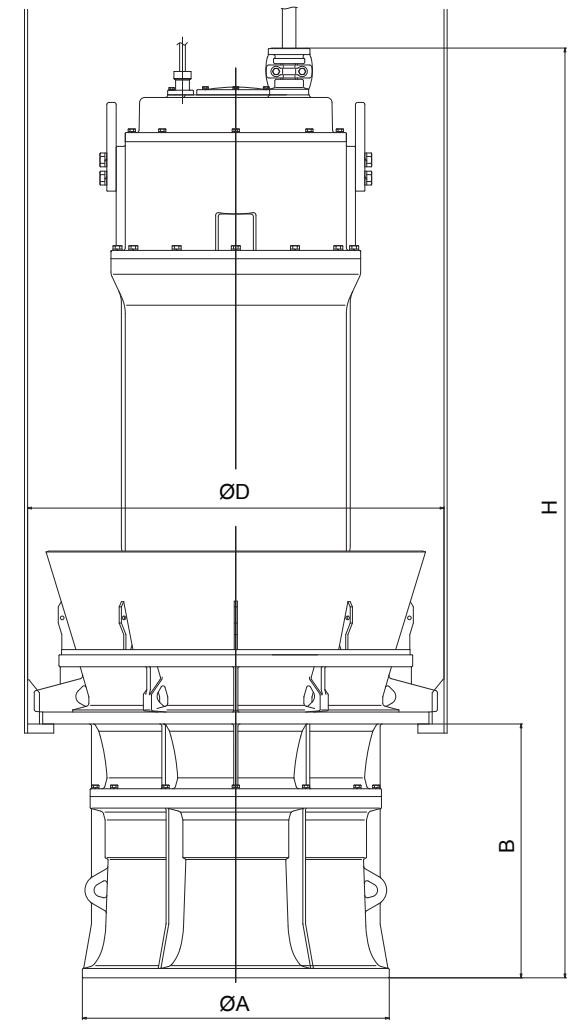

50HZ

GSAX Axial flow pump

Standard Specifications & Dimension of pump

Caliber (mm)	Type (Model)	Output (kw)	Devel-oped (m)	Developed head pump output (m³/min)	A	B	D	H	Weight (kg)
400	GSAX15 6T	15	3.8	16	550	536	560	1250	350
	GSAX19 6T	19	4	19	550	536	560	1480	600
	GSAX22 6T	22	4.5	20	550	536	560	1480	700
	GSAX30 6T	30	5.2	23	550	536	560	1480	750
450	GSAX19 8T	19	3.5	22	660	646	670	1765	750
	GSAX22 8T	22	3.5	25	660	646	670	1765	850
500	GSAX30 6T	30	5	25	660	646	670	1765	750
	GSAX37 6T	37	5.5	28	660	646	670	1765	950
	GSAX45 6T	45	5.6	33	660	646	670	1765	1200
	GSAX55 6T	55	6.5	35	660	646	670	2150	1500
	GSAX22 10T	22	3	30	760	800	750	1950	900
	GSAX30 10T	30	3.5	35	760	800	750	1950	1000
	GSAX37 10T	37	3.6	43	760	800	750	2200	1100
600	GSAX37 8T	37	4.3	35	760	800	750	1950	950
	GSAX45 8T	45	4.7	40	760	800	750	1950	1600
	GSAX55 8T	55	5.5	42	760	800	750	2200	1900
	GSAX75 8T	75	5.8	55	760	890	750	2200	2000
	GSAX30 10T	30	3.5	35	870	890	860	2100	1000
	GSAX37 10T	37	3.6	43	870	890	860	2350	1100
	GSAX45 10T	45	4	47	870	1025	860	2350	2000
	GSAX55 10T	55	4.6	50	980	1025	930	2500	2400
700	GSAX55 8T	55	5	45	980	1025	930	2500	1900
	GSAX75 8T	75	5.6	55	980	1025	930	2500	2000
	GSAX90 8T	90	6	63	980	1025	930	2500	2150
	GSAX110 8T	110	6.5	71	980	890	930	2500	2600
750	GSAX45 10T	45	4	48	980	890	970	2350	2000
	GSAX55 10T	55	4.5	52	980	960	970	2350	2400
	GSAX75 10T	75	5	64	1060	960	1070	2600	2500
	GSAX90 10T	90	5.5	70	1060	960	1070	2730	3100
800	GSAX90 8T	90	6.2	62	980	960	930	2350	2150
	GSAX110 8T	110	6.7	70	980	1025	930	2600	2600
	GSAX130 8T	130	7.2	77	1060	1025	1070	2600	3200
	GSAX150 8T	150	7.5	88	1060	1025	1070	2730	3800
	GSAX190 8T	190	8.2	100	1060	1025	1070	2730	4800
	GSAX75 10T	75	4.7	68	1170	1205	1260	2850	2500
	GSAX90 10T	90	5.2	74	1170	1205	1260	2850	3100
	GSAX110 10T	110	5.7	82	1170	1205	1260	3000	3500
	GSAX130 10T	130	6	92	1170	1205	1260	3000	3800
	GSAX55 14T	55	3.5	67	1160	1265	1160	2880	3100
	GSAX75 14T	75	4.2	76	1160	1265	1160	2880	3200
	GSAX90 14T	90	4.5	86	1160	1265	1160	2880	3500

Caliber (mm)	Type (Model)	Output (kw)	Devel-oped (m)	Developed head pump output (m³/min)	A	B	D	H	Weight (kg)	
900	GSAX75 12T	75	4	80	1160	1265	1160	2880	3100	
	GSAX90 12T	90	4.5	87	1160	1265	1160	2880	3200	
	GSAX110 12T	110	5	96	1160	1265	1160	3050	3800	
	GSAX130 12T	130	5.5	103	1160	1265	1160	3050	4500	
	GSAX55 16T	55	3	78	1165	1155	1160	2925	3700	
	GSAX75 16T	75	3.5	93	1165	1155	1160	2925	4100	
	GSAX90 16T	90	4	98	1165	1155	1160	2925	4500	
	GSAX110 16T	110	4	120	1360	1215	1360	3000	5000	
	1100	GSAX130 10T	130	5.9	95	1160	1265	1160	2880	3800
GSAX150 10T		150	6.2	105	1160	1265	1160	2880	4500	
GSAX190 10T		190	7	118	1160	1265	1160	3050	5800	
GSAX220 10T		220	7.5	128	1160	1265	1160	3050	6300	
GSAX110 14T		110	4.2	115	1360	1300	1360	3070	4500	
GSAX130 14T		130	4.4	130	1360	1300	1360	3200	5000	
GSAX150 14T		150	4.9	135	1360	1300	1360	3200	6300	
GSAX190 14T		190	5.5	152	1360	1300	1360	3200	6600	
GSAX220 14T		220	6	162	1360	1300	1360	3350	6800	
GSAX75 16T		75	3.5	94	1360	1300	1360	3070	4100	
1200	GSAX110 16T	110	4	120	1360	1300	1360	3200	5000	
	GSAX130 16T	130	4.5	125	1360	1300	1360	3200	5500	
	GSAX150 16T	150	4.9	135	1360	1300	1360	3200	6500	
	GSAX190 12T	190	6	139	1360	1300	1360	3200	6300	
	GSAX220 12T	220	6.5	149	1360	1300	1360	3200	6500	
	GSAX250 12T	250	6.9	160	1360	1300	1360	3200	7100	
	GSAX300 12T	300	7.4	180	1360	1300	1360	3500	7600	
	GSAX350 12T	350	7.8	200	1560	1400	1560	3600	8200	
	1300	GSAX150 18T	150	4	165	1560	1420	1550	3200	7920
		GSAX190 18T	190	4.4	190	1560	1420	1550	3200	8140
GSAX220 16T		220	5	195	1560	1420	1550	3450	8760	
GSAX250 14T		250	5.5	202	1560	1420	1550	3450	8910	
GSAX300 14T		300	5.8	225	1560	1420	1550	3870	9200	
1400	GSAX190 14T	190	5	162	1560	1420	1550	3450	8400	
	GSAX220 14T	220	5.5	175	1560	1420	1550	3450	8600	
	GSAX250 14T	250	6	185	1560	1420	1550	3450	9200	
	GSAX300 12T	300	6.5	206	1560	1420	1550	3870	9400	
	GSAX350 12T	350	7	220	1560	1420	1550	3870	10000	
	GSAX400 12T	400	7.4	240	1560	1420	1550	3870	10200	
1500	GSAX300 14T	300	6.2	215	1560	1420	1550	3900	9400	
	GSAX350 14T	350	6.5	240	1560	1420	1550	3900	10000	
	GSAX400 12T	400	7.1	250	1560	1420	1550	3900	10200	
	GSAX450 12T	450	7.5	265	1560	1420	1550	3900	10450	
	GSAX500 12T	500	8	275	1560	1420	1550	3900	10700	

*상기 치수는 제작에 따라 다소 차이가 날 수 있습니다.