


상.하차용 파워벨트 컨베이어 - HPC series

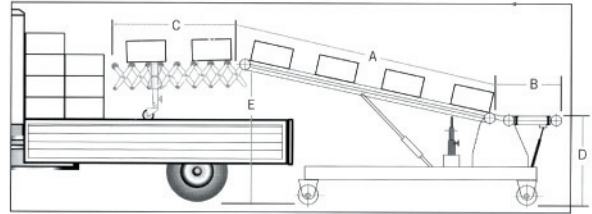

1 SPECIFICATION

(단위 : mm)

MODEL	HPC-26	HPC-36
A	2600	3600
B	850	850
C	800~2050	800~2050
D	600~1000	600~1000
E	800~2200	800~2500

● 컨베이어 속도는 고정속도 임. (20 m/min)

수평벨트 컨베이어 - HHC series



1 SPECIFICATION

(단위 : mm)

MODEL	HHC-25	HHC-50	HHC-80	HHC-120
BELT 폭(mm)	400	400	400	400
FRAME 외폭(mm)	520	520	520	520
FRAME 높이(mm)	800~900	800~900	800~900	800~900
컨베이어 기장(mm)	2500	5000	8000	12000
컨베이어 속도(m/min)	20	20	20	20
FRAME 재질	알루미늄	알루미늄	알루미늄	알루미늄

● 컨베이어 속도는 고정속도임.

컨베이어 물류자동화설비



FREE FLOW CONVEYOR LINE

◀ ROLLER
CONVEYOR



ROLLER C/V

