


QUICK MOLD CHANGING SYSTEM



- IN AND OUT DEVICE OF MOLD ASSISTS TO EXCHANGE MOLDS OF THE INJECTION MACHINE EFFICIENTLY AND ALLOWS IT TO DO IT WITH PRECISION AND STABILITY.
- IT IS EQUIPPED WITH DRIVING ROLLER AT THE MOVING PART CARRYING MOLD AND IT IS DESIGNED TO HAVE SUFFICIENT STRENGTH TO ALLOW 2 SET OF 30 TON LOADED.



MANUFACTURED AND INSTALLED AT
HYUNDAI MOBIS
RUSSIA FACTORY

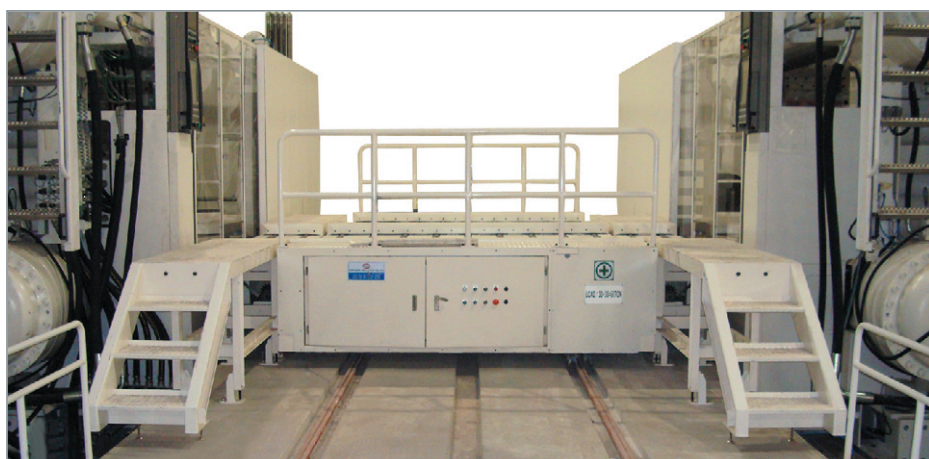

SPECIFICATION

Quick Mold Changing System	
LOADING CAPACITY	30TON X 2EA = 60TON
POWER SUPPLY	AUTOREEL TYPE
POWER SOURCE	3PHASE X 400 X 50hz
TRAVELING SPEED	10 m/min
CONVEYOR SPEED	3 m/min