

STANDARD EQUIPMENT

ISO Standard cabin
All-weather steel cab with 360° visibility
Safety glass windows
Rise-up type windshield wiper
Sliding fold-in front window
Sliding side window(LH)
Lockable door
Hot & cool box
Storage compartment & Ashtray
Transparent cabin roof-cover
Radio / USB player
Handsfree mobile phone system with USB
12 volt power outlet (24V DC to 12V DC converter)
Sun visor
Computer aided power optimization (New CAPO) system
3-power mode, 2-work mode, User mode
Auto deceleration & one-touch deceleration system
Auto warm-up system
Auto overheat prevention system
Automatic climate control
Air conditioner & heater
Defroster
Self-diagnostics system
Starting Aid (air grid heater) for cold weather
Centralized monitoring
LCD display
Engine speed or Trip meter/Accel.
Clock
Gauges
Fuel level gauge
Engine coolant temperature gauge
Hyd. oil temperature gauge
Warnings
Check engine
Communication error
Low battery
Air cleaner clogging
Indicators
Max Power
Fuel warmer
Auto idle
Door and cab locks, one key
Two outside rearview mirrors
Mechanical suspension seat with heater
Four front working lights
Electric horn
Batteries (2 x 12V x 72 AH)
Battery master switch
Removable clean-out screen for cooler
Automatic swing brake
Removable reservoir tank
Fuel pre-filter with fuel warmer
Boom holding system
Arm holding system
Track shoes (500mm, 20")
Track rail guard
Accumulator for lowering work equipment
Electric transducer
Lower frame under cover (Normal)
Cabin Rops (ISO 12117-2)
ROPS (Roll Over Protective Structure)

OPTIONAL EQUIPMENT

Fuel filler pump (35 L/min)
Beacon lamp
Safety lock valve for boom cylinder with overload warning device
Safety lock valve for arm cylinder
Single-acting piping kit (breaker, etc.)
Double-acting piping kit (clamshell, etc.)
Quick coupler
Travel alarm
Booms
4.6 m, 15' 1"
4.9 m, 16' 1" (Hyd. adjustable boom)
Arms
1.9m, 6' 3"
2.1 m, 6' 11"
2.5 m, 8' 2"
3.0 m, 9' 10"
Cabin FOPS/FOG (ISO/DIS 10262) Level II
FOPS (Falling Object Protective Structure)
FOG (Falling Object Guard)
Cabin lights
Cabin front window rain guard
Track shoes
Triple grousers shoe (500mm, 20")
Triple grousers shoe (600mm, 24")
Triple grousers shoe (700mm, 28")
Rubbber pad (600mm, 24")
Lower frame under cover (Additional)
Long crawler lower frame
Dozer blade
Tool kit
Operator suit
Rearview camera
Pattern change valve (2 patterns)
Hi-mate (Remote Management System)

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.

* The photos may include attachments and optional equipment that are not available in your area.

* Materials and specifications are subject to change without advance notice.

* All imperial measurements rounded off to the nearest pound or inch.

PLEASE CONTACT

 **HYUNDAI**
HEAVY INDUSTRIES CO.,LTD.
CONSTRUCTION EQUIPMENT

Head Office
1000 BANGEOJINSUNHWAN-DORO, DONG-GU, ULSAN, 682-792, KOREA
TEL:(82)52-202-7722, 9807 FAX:(82)52-202-7720



We build a better future

Robex
145CR-9
With Tier 3 Engine installed

*Photo may include optional equipment.

Pride at Work

Hyundai Heavy Industries strives to build state-of-the art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality. Take pride in your work with Hyundai!



*Photo may include optional equipment.

Robex 145CR-9

Machine Walk-Around

Engine Technology

Proven / reliable, fuel efficient Mitsubishi Tier III D04FD-TAA engine
Electronically controlled for optimum fuel to air ratio and clean, efficient combustion
Low noise / Auto engine overheat feature / Anti-restart feature

Hydraulic System Improvements

New patented hydraulic control for improved controllability / Improved control valve design for added efficiency and smoother operation / New auto boom and swing priority system for optimum speed / New auto power boost feature for additional power when needed / Improved arm-in and boom-down flow regeneration system for added speed and efficiency

Pump Compartment

Industry-leading, powerful, reliable Kawasaki designed, variable volume in-line axial piston pumps
New compact solenoid block equipped with 3 solenoid valves, 1 EPPR valve, 1 check valve accumulator and line filter controls
2 speed travel, power boost, boom priority, arm-in regeneration, safety lock

Enhanced Operator Cab

Improved Visibility

Enlarged cab with improved visibility / See-through upper skylight for visibility and ventilation
Larger right-side glass - now one piece, for better right visibility
Safety glass windows on all sides - less expensive than (polycarbonate) and won't scratch or fade
Closeable sunshade for operator convenience / Reduced front window seam for improved operator view

Improved Cab Construction

New steel tube construction for added operator safety, protection and durability
New window open/close mechanism designed with cable and spring lift assist and single latch release

Improved Suspension Seat / Console Assembly

Ergonomic joysticks with auxiliary control buttons for attachment use. Now with new sleek styling
Adjustable heated suspension seat, control console and arm rests

Advanced 7" Color Cluster

New Color LCD Display with easy-to-read digital gauges for hydraulic oil temperature, water temperature, and fuel. A simplified design makes adjustment and diagnostics easier. Also, new enhanced features such as rear-view camera are integrated into monitor.

3 power modes : (P) Power, (S) Standard, (E) Economy, 2 work modes : Dig & Attachment, (U) User mode for operator preference

Enhanced self-diagnostic features with GPS download capability

One pump flow or two pump flow for optional attachment now selectable through the cluster / New anti-theft system with password capability

Boom speed and arm regeneration are selectable through the monitor.

Auto power boost is now available - selectable (on/off) through the monitor.

Powerful air conditioning and heat with auto climate control, 20% more heat and air output than 7A series!

RMS (Remote Management System) works through GPS/satellite technology to ultimately provide better customer service and support.

Undercarriage

Sealed track chain (urethane seals) / Standard track rail guard / Comfortable bolt-on steps

Large upper roller cut-outs for debris clean-out / Tapered side frames for debris clean-out / Grease-type track tensioner

Preference

Operating the R145CR-9 is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.



*Photo may include optional equipment.



Wide Cabin with Excellent Visibility

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. Special attention was given to a clear, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand. This well balanced combination of precision aspects put the operator in the perfect position to work safely and securely.

Operator Comfort

In the 9 series cabin you can easily adjust the seat, console and armrest settings to best suit your personal operating preferences. Seat and console position can be set together and independent from each other. Additional creature comforts include the fully automatic high-capacity airconditioning system and the radio / USB player.



Reduced Stress

Work is stressful enough. Your work environment should be stress free. Hyundai's 9 series provides improved cab amenities, additional space and a comfortable seat to minimize stress to the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with USB player, AM/FM stereo, plus remotely located controls is perfect for listening to music favorites. Operators can even talk on the phone with the hands-free cell phone feature.



Operator - Friendly Cluster

The advanced new cluster with 7 inch wide color LCD screen and toggle switch allows the operator to select his personal machine preferences. Power and work mode selection, self diagnostics, optional rear-view camera, maintenance check lists, start-up machine security, and video functions were integrated into the cluster to make the machine more versatile and the operator more productive.



Precision

Innovative hydraulic system technologies make the 9 series excavator fast, smooth and easy to control.



*Photo may include optional equipment.

Computer Aided Power

The engine horsepower and hydraulic horsepower together in unison through the advanced CAPO(Computer Aided Power Optimization) system, provide the precise flow needed for the job at hand. Operators can set their own preferences for boom or swing priority, power mode selection and optional work tools at the touch of a button. The CAPO system also provides complete self diagnostic features and digital gauges for important information like hydraulic oil temperature, water temperature and fuel level. This system interfaces with multiple sensors placed throughout the hydraulic system as well as the electronically controlled engine to provide the optimum level of engine power and hydraulic flow.

Power Mode

P (Power Max) mode maximizes machine speed and power for mass production. S (Standard) mode provides a reduced, fixed rpm for optimum performance and improved fuel economy. For maximum fuel savings and improved control, E (Economy) mode provides precise flow and engine power based on load demand. Three unique power modes provide the operator with custom power, speed and fuel economy.

Work Mode

The work mode allows the operator to select single flow attachments like a hydraulic breaker or bi-directional flow attachments like a crusher. Flow settings unique to each attachment can be programmed from within the cluster.

User Mode

Some jobs require more precise machine settings. Using the versatile U (User) mode, the operator can customize engine speed, pump output, idle speed and other machine settings for the job at hand.

Improved Hydraulic System



To achieve optimum precision, Hyundai redesigned the hydraulic system to provide the operator with super fine touch and improved controllability. Improved pump flow control reduces flow when controls are not being used to minimize fuel consumption.

Improved spool valves in the control valve are engineered to provide more precise flow to each function with less effort.

Improved hydraulic valves, precision-designed variable volume piston pumps, fine-touch pilot controls, and enhanced travel functions make any operator running a 9 series look like a smooth operator. Newly improved features

include arm-in and boom-down flow regeneration, improved control valve technology and innovative auto boom and swing priority for optimal performance in any application.

Auto Boom & Swing Priority

This smart function automatically and continuously looks the ideal hydraulic flow balance for the boom and swing motions of the machine. The advanced CAPO system monitors the hydraulic system and adjusts its settings to maximize performance and productivity.



Performance

9 series is designed for maximum performance to keep the operator working productively.

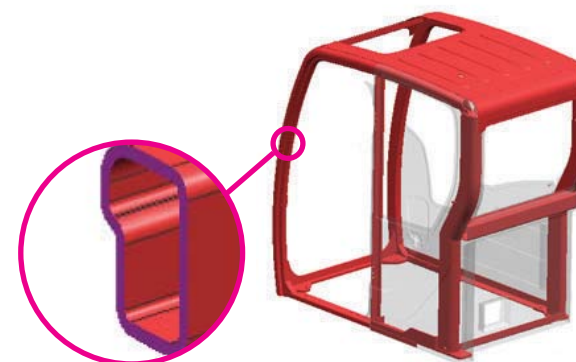


*Photo may include optional equipment.

Track Rail Guard & Adjusters

adjustment is made easy with standard grease cylinder track adjusters and shock absorbing springs.

Durable track rail guards keep track links in place. Track



Structure Strength

The 9 series cabin structure has been fitted with stronger but slimmer tubing for more safety and improved visibility. Low-stress, high strength steel is integrally welded to form a stronger, more durable upper and lower frame. Structural integrity was tested by way of FEM (Finite Elements Method) analysis and long-term durability tests. The optional ROPS(Roll Over Protective Structure) cab can be equipped to enhance operator safety.

Mitsubishi D04FD-TAA


The Tier III, four cylinder, 4 cycle, turbo-charged, charge air cooled, Mitsubishi D04FD-TAA engine provides maximum power, reliability, optimum fuel economy, and reduced emissions. Electronically controlled fuel injection and diagnostic capabilities add to the engines efficiency and serviceability.

Heavy-duty strength

Everyone who's ever worked on construction equipment knows, there is no substitute for power and durability. The D04FD-TAA handles the toughest loads and the roughest work conditions.


At the same time, it delivers better fuel economy, has better cold starting capability and is up to 50% quieter in operation. Plus, the heavy-duty design of the D04FD-TAA engine block and components add reliability and durability you can count on every day, year after year.

Both fuel-efficiency and response are significantly enhanced with the Mitsubishi high pressure common rail fuel system. The system delivers high pressure injection, independent of engine speed, for optimum performance and flexibility at every rpm.

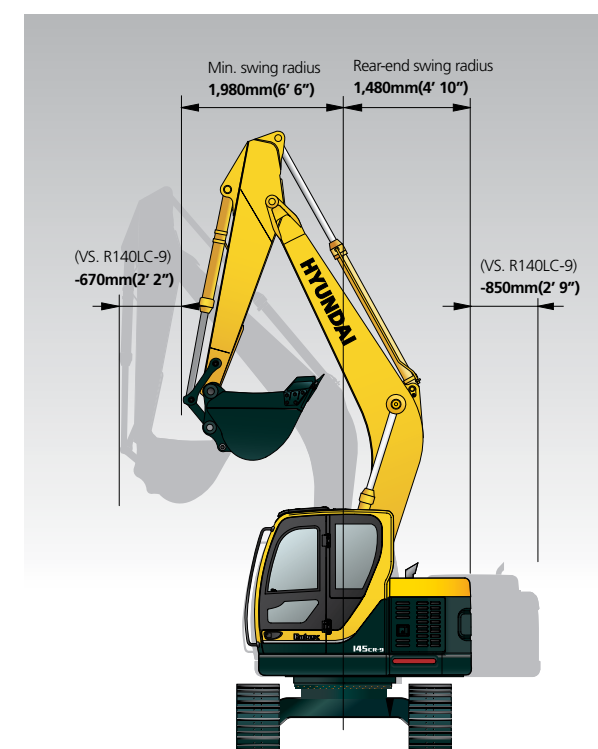

Excellent Performance in Confined Areas

R145CR-9's short (1,480mm) tail swing radius allows the operator work in confined areas like close to buildings on roadways, and in urban areas. This Compact radius design provides easy and efficient operation in any limited space work environment.

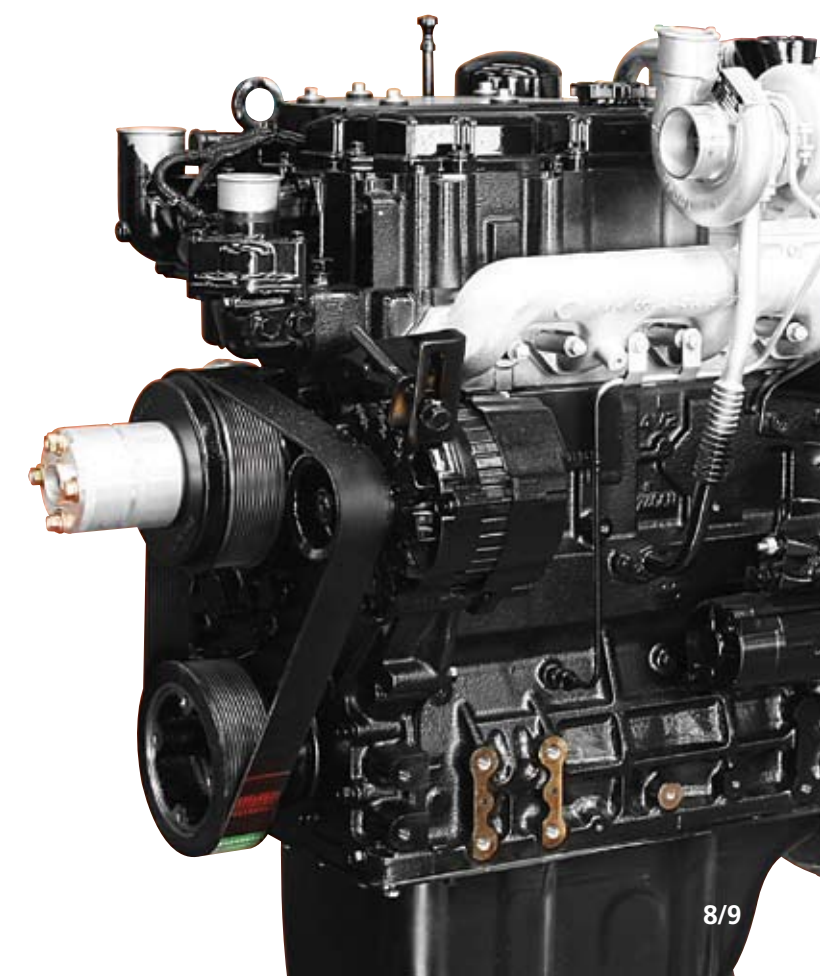

Profitability

9 series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.



*Photo may include optional equipment.

Fuel Efficient

9 series excavators are engineered to be extremely fuel efficient. New innovations like two-stage auto decel system and the new economy mode help to conserve fuel and reduce the impact on the environment.



Hi-mate (Remote Management System)

Hi-mate, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi-mate saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.



Easy Access

Ground-line access to filters, lube fittings, fuses, machine computer components and wide open compartments makes service more convenient on the 9 series.



Long-Life Components

9 series excavators were designed with bushings designed for long-life lube intervals (250 hrs) & polymer shims (wear resistant, noise reducing), long-life hydraulic filters (1,000hrs), long-life hydraulic oil (5,000hrs), more efficient cooling systems and integrated preheating systems which extend service intervals, minimize operating costs and reduce machine down time.

Specifications

ENGINE

MODEL			Mitsubishi D04FD-TAA
Type			Water cooled, 4 cycle Diesel, 4-cylinders in line, direct injection, turbocharged charger and air cooled
Rated flywheel horse power	SAE	J1995 (gross) J1349 (net)	119 HP (89 kW)/ 2,000 rpm 113 HP (85 kW)/ 2,000 rpm
	DIN	6271/1 (gross) 6271/1 (net)	121 PS (89 kW)/ 2,000 rpm 115 PS (85 kW)/ 2,000 rpm
Max. torque			45.4 kgf-m(328 lbf-ft)/ 1,700 rpm
Bore X stroke			102 x 130 mm (4.0" x 5.1")
Piston displacement			4,249cc (259.3 in ³)
Batteries			2 X 12V X 72AH
Starting motor			24V- 5.0kW
Alternator			24V- 50Amp

HYDRAULIC SYSTEM

MAIN PUMP	
Type	Variable displacement tandem axis piston pumps
Rated flow	2 X 123.5L /min (32.6 US gpm / 27.2 UK gpm)
Sub-pump for pilot circuit	Gear pump

Cross-sensing and fuel saving pump system.

HYDRAULIC MOTORS	
Travel	Two speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING	
Implement circuits	350 kgf/cm ² (4,980 psi)
Travel	350 kgf/cm ² (4,980 psi)
Power boost (boom, arm, bucket)	380 kgf/cm ² (5,410 psi)
Swing circuit	285 kgf/cm ² (4,050 psi)
Pilot circuit	40 kgf/cm ² (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS		
No. of cylinder bore X stroke	Boom: 2-105 X 1,105 mm (4.1" X 43.5")	
	Arm: 1-115 X 1,138 mm (4.5" X 44.8")	
	Bucket: 1-100 X 840 mm (3.9" X 33.1")	
	Blade: 2-100 X 250 mm (3.9" X 9.8")	
	2 pcs Boom	1st: 2-105 X 995 mm (4.1" X 39.2") 2nd: 1-145 X 613 mm (5.7" X 24.1")

DRIVES & BRAKES

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor, in-shoe design
Reduction system	Planetary reduction gear
Max. drawbar pull	13,300 kgf (29,321 lbf)
Max. travel speed(high) / (low)	5.5 km/hr (3.4 mph) / 3.2 km/hr (2.0 mph)
Gradeability	35° (70 %)
Parking brake	Multi wet disc

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket(ISO)
Traveling and steering	Two levers with pedals
Engine throttle	Electric, Dial type

SWING SYSTEM

Swing motor	Fixed displacement axial piston motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	12 rpm

COOLANT & LUBRICANT CAPACITY

Refilling	liter	US gal	UK gal
Fuel tank	232	61.3	51.0
Engine coolant	14.5	3.8	3.2
Engine oil	17.5	4.6	3.8
Swing device-gear oil	2.5	0.7	0.5
Final drive(each)-gear oil	1.8	0.5	0.4
Hydraulic system(including tank)	180	47.6	39.6
Hydraulic tank	96	25.4	21.1

UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

Center frame	X - leg type			
Track frame	Pentagonal box type			
No. of shoes on each side	R145CR-9	45EA	R145LCR-9	47EA
No. of carrier roller on each side		1 EA		2 EA
No. of track roller on each side		7 EA		7 EA
No. of rail guard on each side		2 EA		2 EA

OPERATING WEIGHT (APPROXIMATE)


Operating weight, including 4,600mm (15' 1") boom, 2,500mm (8' 2") arm, SAE heaped 0.52m³ (0.68 yd³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

MAJOR COMPONENT WEIGHT	
Upperstructure	6,950 kg (15,320 lb)
4.6m (15' 1")mono boom(with arm cylinder)	1,030 kg (2,270 lb)

OPERATING WEIGHT				
Shoes		Operating weight		Ground pressure
Type	Width mm(in)		kg(lb)	kgf/cm ² (psi)
Triple grouser	500 (20")	R145CR-9	14,600(32,190)	0.46(6.54)
		R145CR-9 (Dozer type)	15,400(33,950)	0.49(6.97)
		R145LCR-9	14,785(32,600)	0.47(6.68)
		R145LCR-9 (Dozer type)	15,585(34,360)	0.49(6.97)
	600 (24")	R145CR-9	14,790(32,610)	0.39(5.55)
		R145CR-9 (Dozer type)	15,610(34,410)	0.41(5.83)
		R145LCR-9	14,980(33,020)	0.40(5.69)
		R145LCR-9 (Dozer type)	15,800(34,830)	0.42(5.97)
	700 (28")	R145CR-9	15,020(33,110)	0.34(4.83)
		R145CR-9 (Dozer type)	15,840(34,920)	0.36(5.12)
		R145LCR-9	15,215(33,540)	0.34(4.83)
		R145LCR-9 (Dozer type)	16,035(35,350)	0.36(5.12)

BUCKETS

All buckets are welded with high-strength steel.

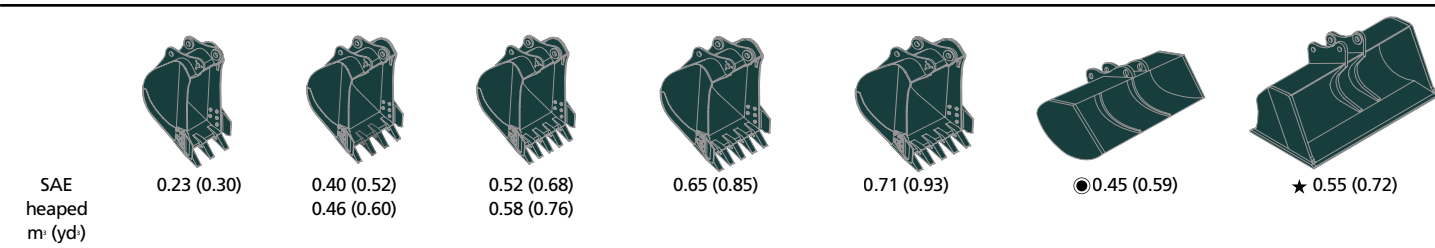

Capacity m³ (yd³)		Width mm (in)		Weight kg (lb)	Recommendation mm (ft-in)			
SAE heaped	CECE heaped	Without sidecutters	With sidecutters		4,600 (15' 1") Boom			
					1,900 (6' 3") Arm	2,100 (6' 11") Arm	2,500 (8' 2") Arm	3,000 (9' 10") Arm
0.23 (0.30)	0.20(0.26)	520(20.5)	620(24.4)	335(740)	●	●	●	■
0.40 (0.52)	0.35(0.46)	760(29.9)	860(33.9)	410(900)	●	●	●	■
0.46 (0.60)	0.40(0.52)	850(33.5)	950(37.4)	435(960)	●	●	●	▲
0.52 (0.68)	0.45(0.59)	935(36.8)	1,035(40.8)	460(1,010)	●	●	●	—
0.58 (0.76)	0.50(0.65)	1,030(40.6)	1,130(44.5)	480(1,060)	●	●	■	—
0.65 (0.85)	0.55(0.72)	1,110(43.7)	1,210(47.6)	500(1,100)	■	■	▲	—
0.71 (0.93)	0.60(0.78)	1,205(47.4)	-	540(1,190)	▲	▲	—	—
● 0.45 (0.59)	0.40(0.52)	1,520(59.8)	-	410(900)	●	●	■	—
★ 0.55 (0.72)	0.45(0.59)	1,800(70.9)	-	585(1,290)	■	▲	▲	—

● Ditching bucket

★ Slope finishing bucket

● : Applicable for materials with density of 2,000 kg /m³ (3,370 lb/ yd³) or less

■ : Applicable for materials with density of 1,600 kg /m³ (2,700 lb/ yd³) or less

▲ : Applicable for materials with density of 1,100 kg /m³ (1,850 lb/ yd³) or less

ATTACHMENT

Booms and arms are welded, a low-stress, full-box section design. 4.6m(15' 1") boom and 1.9m(6' 3"), 2.1m(6' 11"), 2.5m(8' 2"), 3.0m(9' 10")arms are available.

DIGGING FORCE


Boom	Length	mm (ft-in)	4,600 (15' 1")				Remarks
	Weight	kg (lb)	1,030 (2,270)				
Arm	Length	mm (ft-in)	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")	
	Weight	kg (lb)	560 (1,230)	580 (1,280)	610 (1,340)	670 (1,480)	
Bucket digging force	SAE	kN	87.3[94.8]	87.3[94.8]	87.3[94.8]	87.3[94.8]	[]: Power Boost
		kgf	8,900[9,660]	8,900[9,660]	8,900[9,660]	8,900[9,660]	
		lbf	19,620[21,300]	19,620[21,300]	19,620[21,300]	19,620[21,300]	
	ISO	kN	102[110.8]	102[110.8]	102[110.8]	102[110.8]	
		kgf	10,400[11,290]	10,400[11,290]	10,400[11,290]	10,400[11,290]	
		lbf	22,930[24,890]	22,930[24,890]	22,930[24,890]	22,930[24,890]	
Arm crowd force	SAE	kN	76.5[83.1]	73.6[79.9]	62.8[68.2]	55.9[60.7]	
		kgf	7,800[8,470]	7,500[8,140]	6,400[6,950]	5,700[6,190]	
		lbf	17,200[18,670]	16,530[17,950]	14,110[15,320]	12,570[13,640]	
	ISO	kN	80.4[87.3]	77.5[84.1]	65.7[71.4]	57.9[62.8]	
		kgf	8,200[8,900]	7,900[8,580]	6,700[7,270]	5,900[6,410]	
		lbf	18,080[19,630]	17,420[18,910]	14,770[16,040]	13,010[14,120]	

Note: Boom weight includes arm cylinder, piping, and pin

Arm weight includes bucket cylinder, linkage, and pin


Dimensions & Working Range

R145CR-9 DIMENSIONS

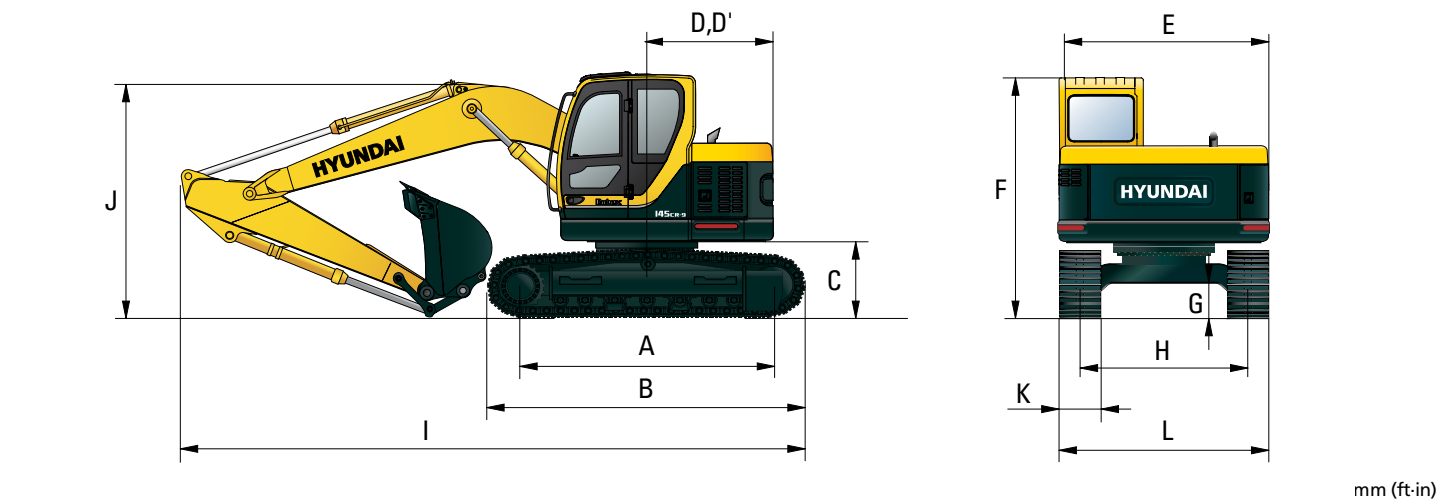


A	Tumbler distance	2,910 (9' 7")	Boom length	4,600(15' 1")			
B	Overall length of crawler	3,640 (11' 11")	Arm length	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
C	Ground clearance of counterweight	930 (3' 1")	I Overall length	7,290 (23' 11")	7,310 (23' 12")	7,270 (23' 10")	7,210 (23' 8")
D	Tail swing radius	1,480 (4' 10")	J Overall height of boom	2,630 (8' 8")	2,710 (8' 11")	2,860 (9' 5")	3,210 (10' 6")
D'	Rear-end length	1,480 (4' 10")	K Track shoe width	500 (20")	600 (24")	700 (28")	
E	Overall width of upperstructure	2,500 (8' 2")	L Overall width	2,500 (8' 2")	2,600 (8' 6")	2,700 (8' 10")	
F	Overall height of cab	2,900 (9' 6")					
G	Min. ground clearance	440 (1' 5")					
H	Track gauge	2,000 (6' 7")					

R145CR-9 WORKING RANGE

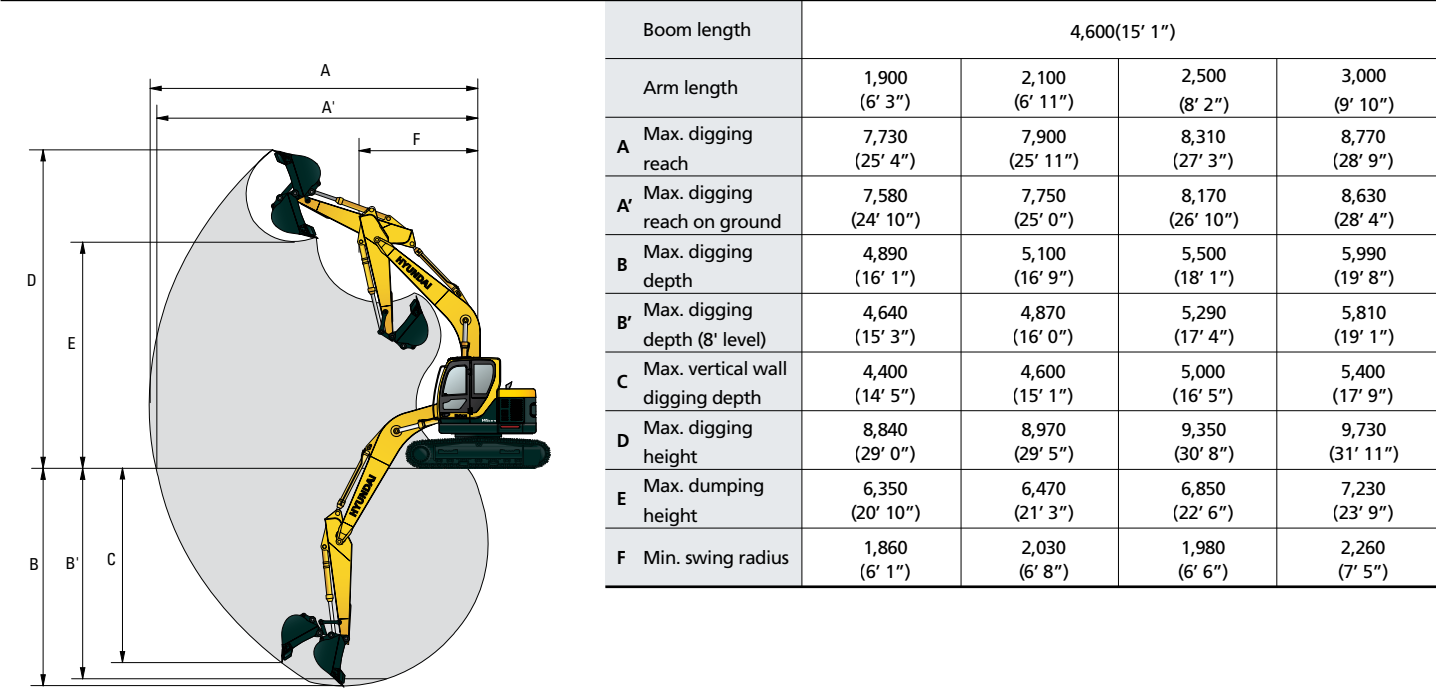


Dimensions & Working Range

R145LCR-9 DIMENSIONS

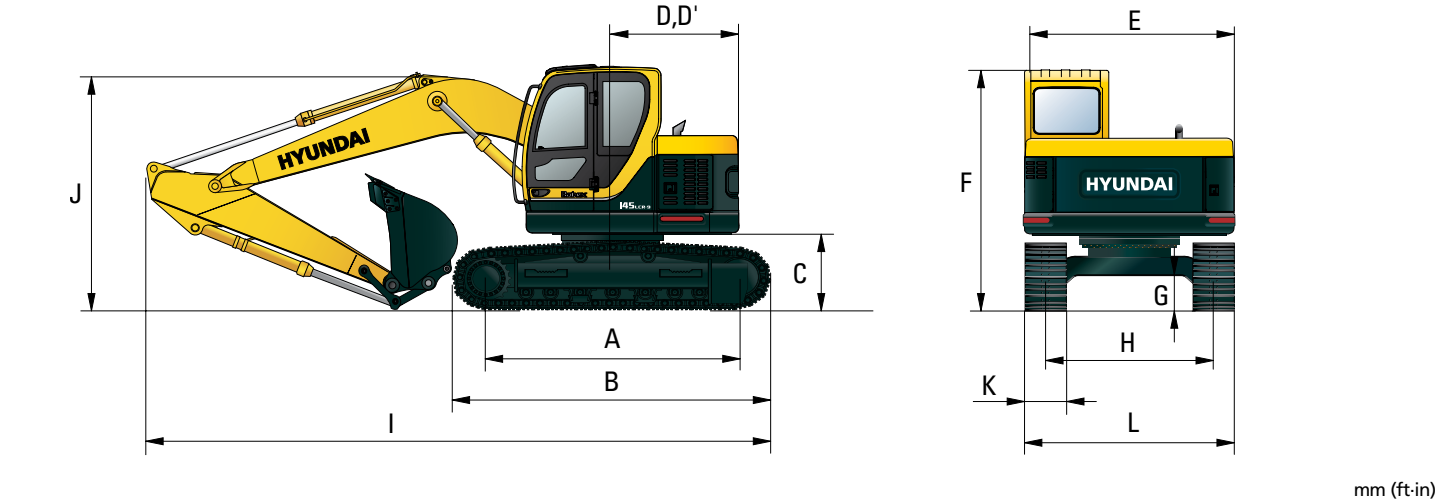


A	Tumbler distance	3,090 (10' 2")	Boom length	4,600(15' 1")			
B	Overall length of crawler	3,820 (12' 6")	Arm length	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
C	Ground clearance of counterweight	930 (3' 1")	I Overall length	7,380 (24' 3")	7,400 (24' 3")	7,360 (24' 2")	7,300 (23' 11")
D	Tail swing radius	1,480 (4' 10")	J Overall height of boom	2,630 (8' 8")	2,710 (8' 11")	2,860 (9' 5")	3,210 (10' 6")
D'	Rear-end length	1,480 (4' 10")					
E	Overall width of upperstructure	2,500 (8' 2")	K Track shoe width	500 (20")	600 (24")	700 (28")	
F	Overall height of cab	2,900 (9' 6")	L Overall width	2,500 (8' 2")	2,600 (8' 6")	2,700 (8' 10")	
G	Min. ground clearance	440 (1' 5")					
H	Track gauge	2,000 (6' 7")					

R145LCR-9 WORKING RANGE

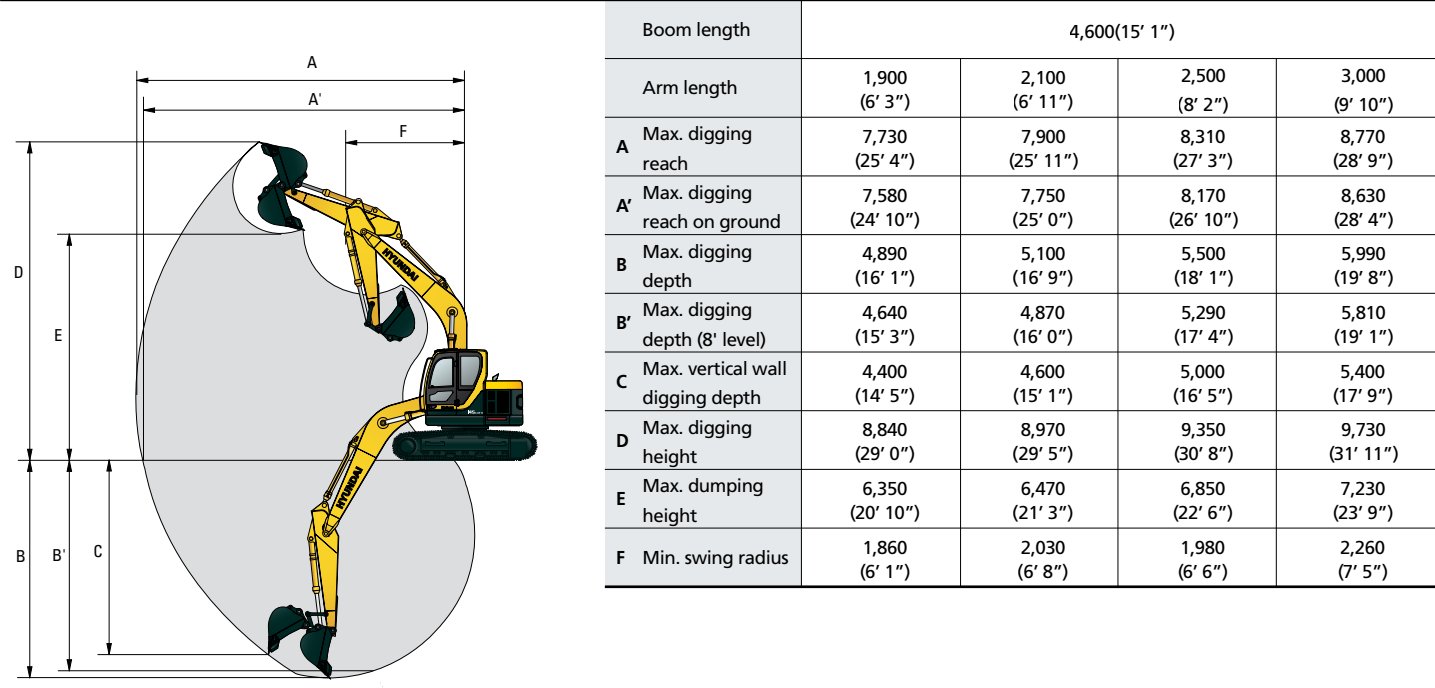

Dimensions & Working Range


R145CR-9 (DOZER TYPE) DIMENSIONS

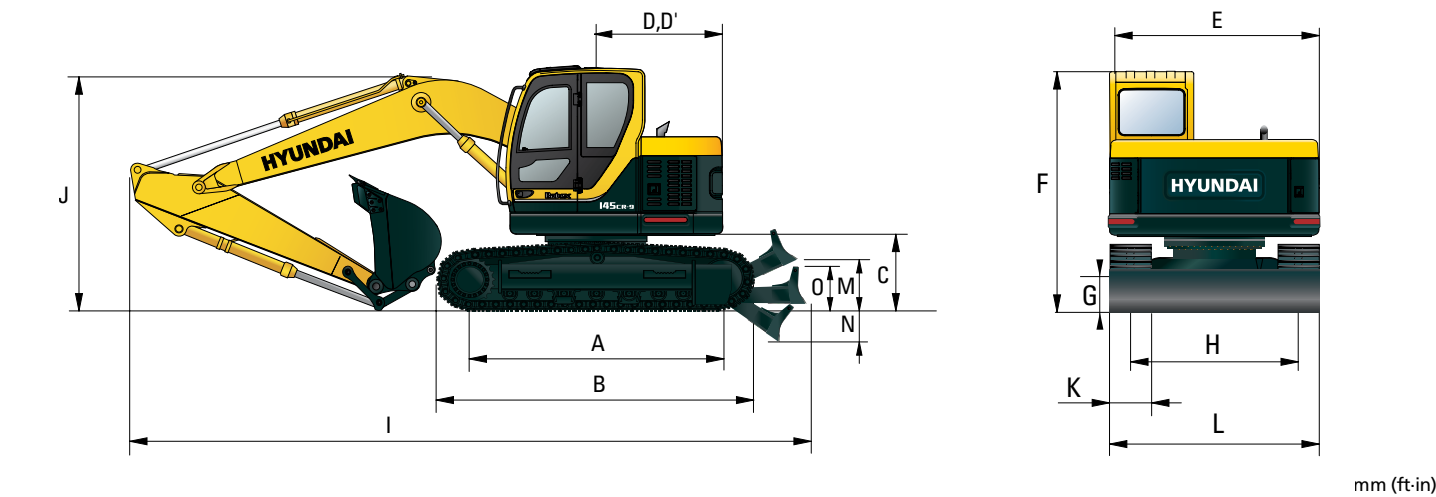

A	Tumbler distance	2,910 (9' 7")
B	Overall length of crawler	3,640 (11' 11")
C	Ground clearance of counterweight	930 (3' 1")
D	Tail swing radius	1,480 (4' 10")
D'	Rear-end length	1,480 (4' 10")
E	Overall width of upperstructure	2,500 (8' 2")
F	Overall height of cab	2,900 (9' 6")
G	Min. ground clearance	440 (1' 5")
H	Track gauge	2,000 (6' 7")
M	Ground clearance of blade up	420 (1' 8")
N	Depth of blade down	430 (1' 6")
O	Height of blade	575 (1' 8")

Boom length	4,600(15' 1")			
Arm length	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
I Overall length	7,840 (25' 9")	7,860 (25' 9")	7,820 (25' 8")	7,760 (25' 6")
J Overall height of boom	2,630 (8' 8")	2,710 (8' 11")	2,860 (9' 5")	3,210 (10' 6")
K Track shoe width	500 (20")	600 (24")	700 (28")	
L Overall width	2,500 (8' 2")	2,600 (8' 6")	2,700 (8' 10")	


R145CR-9 (DOZER TYPE) WORKING RANGE

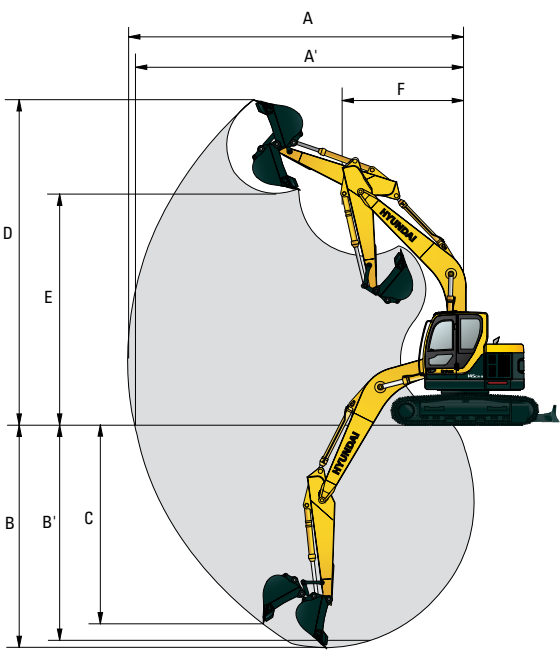

Boom length	4,600(15' 1")			
Arm length	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
A Max. digging reach	7,730 (25' 4")	7,900 (25' 11")	8,310 (27' 3")	8,770 (28' 9")
A' Max. digging reach on ground	7,580 (24' 10")	7,750 (25' 0")	8,170 (26' 10")	8,630 (28' 4")
B Max. digging depth	4,890 (16' 1")	5,100 (16' 9")	5,500 (18' 1")	5,990 (19' 8")
B' Max. digging depth (8' level)	4,640 (15' 3")	4,870 (16' 0")	5,290 (17' 4")	5,810 (19' 1")
C Max. vertical wall digging depth	4,400 (14' 5")	4,600 (15' 1")	5,000 (16' 5")	5,400 (17' 9")
D Max. digging height	8,840 (29' 0")	8,970 (29' 5")	9,350 (30' 8")	9,730 (31' 11")
E Max. dumping height	6,350 (20' 10")	6,470 (21' 3")	6,850 (22' 6")	7,230 (23' 9")
F Min. swing radius	1,860 (6' 1")	2,030 (6' 8")	1,980 (6' 6")	2,260 (7' 5")

Dimensions & Working Range


R145LCR-9 (DOZER TYPE) DIMENSIONS

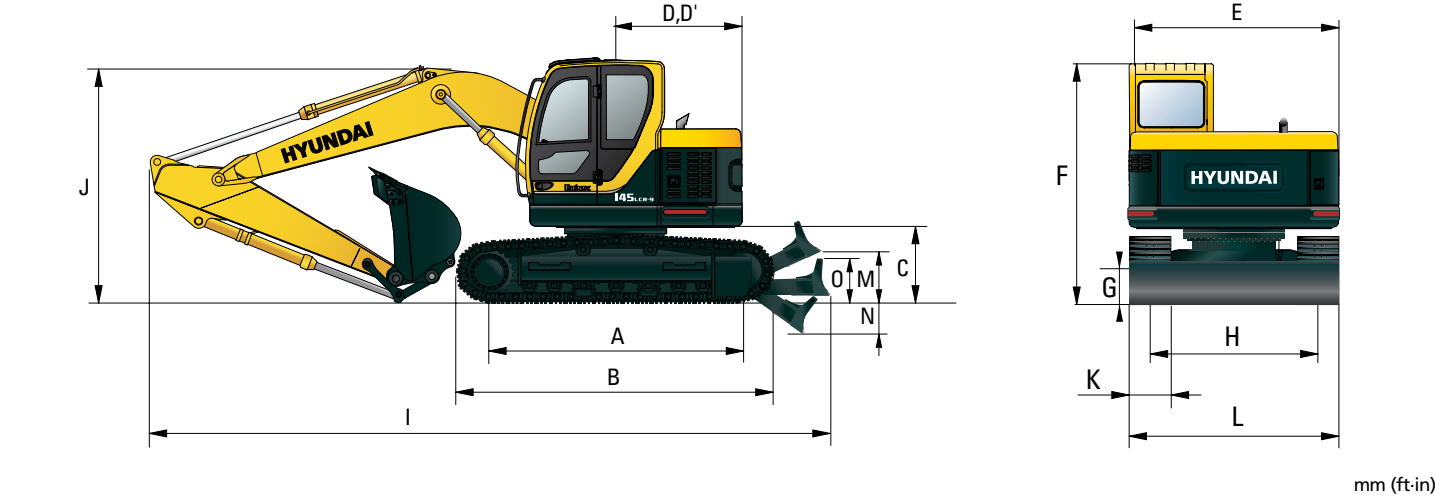

A	Tumbler distance	3,090 (10' 2")
B	Overall length of crawler	3,820 (12' 6")
C	Ground clearance of counterweight	930 (3' 1")
D	Tail swing radius	1,480 (4' 10")
D'	Rear-end length	1,480 (4' 10")
E	Overall width of upperstructure	2,500 (8' 2")
F	Overall height of cab	2,900 (9' 6")
G	Min. ground clearance	440 (1' 5")
H	Track gauge	2,000 (6' 7")
M	Ground clearance of blade up	420 (1' 8")
N	Depth of blade down	430 (1' 6")
O	Height of blade	575 (1' 8")

Boom length	4,600(15' 1")			
Arm length	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
I Overall length	7,840 (25' 9")	7,860 (25' 9")	7,820 (25' 8")	7,760 (25' 6")
J Overall height of boom	2,630 (8' 8")	2,710 (8' 11")	2,860 (9' 5")	3,210 (10' 6")
K Track shoe width	500 (20")	600 (24")	700 (28")	
L Overall width	2,500 (8' 2")	2,600 (8' 6")	2,700 (8' 10")	


R145LCR-9 (DOZER TYPE) WORKING RANGE

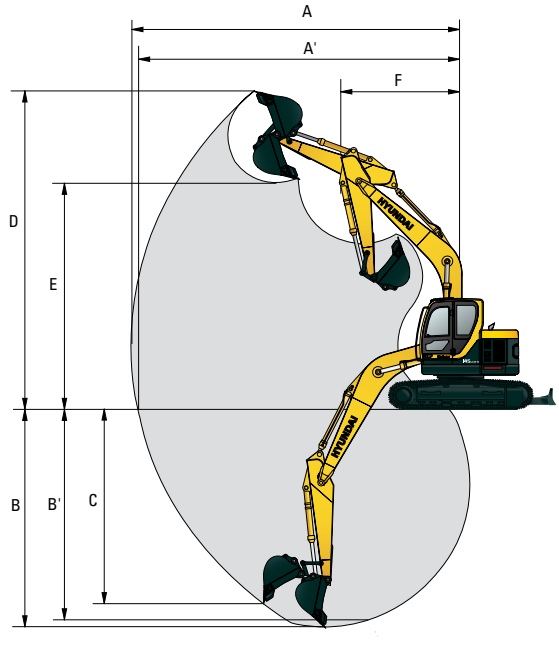

Boom length	4,600(15' 1")			
Arm length	1,900 (6' 3")	2,100 (6' 11")	2,500 (8' 2")	3,000 (9' 10")
A Max. digging reach	7,730 (25' 4")	7,900 (25' 11")	8,310 (27' 3")	8,770 (28' 9")
A' Max. digging reach on ground	7,580 (24' 10")	7,750 (25' 0")	8,170 (26' 10")	8,630 (28' 4")
B Max. digging depth	4,890 (16' 1")	5,100 (16' 9")	5,500 (18' 1")	5,990 (19' 8")
B' Max. digging depth (8' level)	4,640 (15' 3")	4,870 (16' 0")	5,290 (17' 4")	5,810 (19' 1")
C Max. vertical wall digging depth	4,400 (14' 5")	4,600 (15' 1")	5,000 (16' 5")	5,400 (17' 9")
D Max. digging height	8,840 (29' 0")	8,970 (29' 5")	9,350 (30' 8")	9,730 (31' 11")
E Max. dumping height	6,350 (20' 10")	6,470 (21' 3")	6,850 (22' 6")	7,230 (23' 9")
F Min. swing radius	1,860 (6' 1")	2,030 (6' 8")	1,980 (6' 6")	2,260 (7' 5")


Dimensions & Working Range

R145LCR-9 ADJUSTABLE BOOM DIMENSIONS

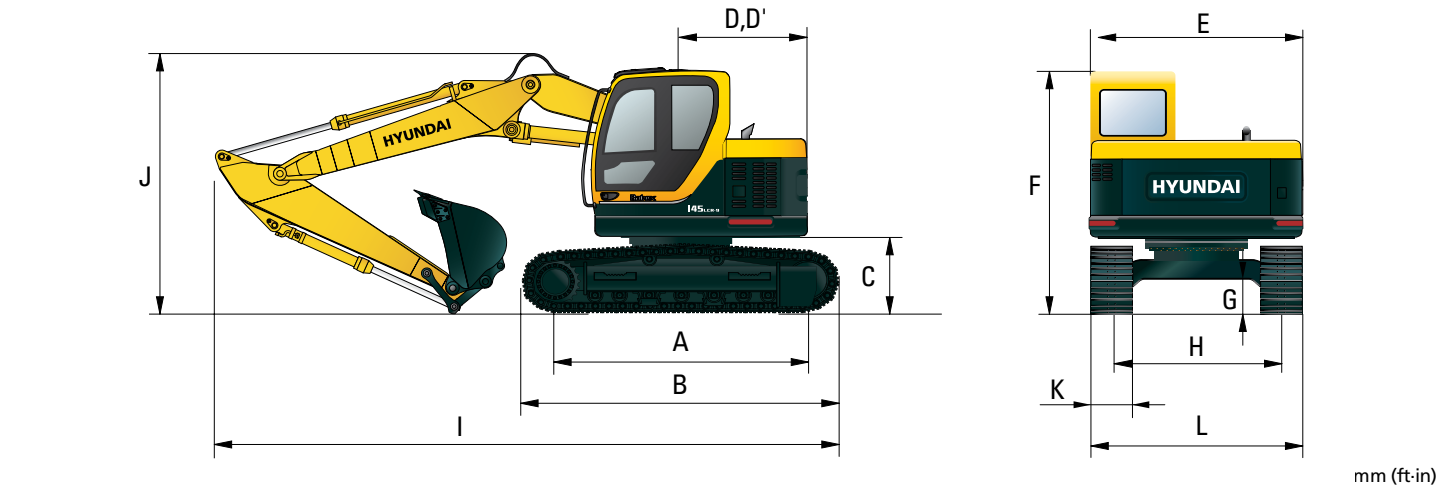

A	Tumbler distance	2,910 (9' 7")	Boom length			4,900(16' 1")
B	Overall length of crawler	3,640 (11' 11")	Arm length		2,100 (6' 11")	2,500 (8' 2")
C	Ground clearance of counterweight	930 (3' 1")	Overall length		7,720 (25' 4")	7,690 (25' 3")
D	Tail swing radius	1,480 (4' 10")	Overall height of boom		2,870 (9' 5")	2,900 (9' 6")
D'	Rear-end length	1,480 (4' 10")				
E	Overall width of upperstructure	2,500 (8' 2")				
F	Overall height of cab	2,900 (9' 6")				
G	Min. ground clearance	440 (1' 5")				
H	Track gauge	2,000 (6' 7")				
			K	Track shoe width	500 (20")	600 (24")
					700 (28")	
			L	Overall width	2,500 (8' 2")	2,600 (8' 6")
					2,700 (8' 10")	


R14LCR-9 ADJUSTABLE BOOM WORKING RANGE

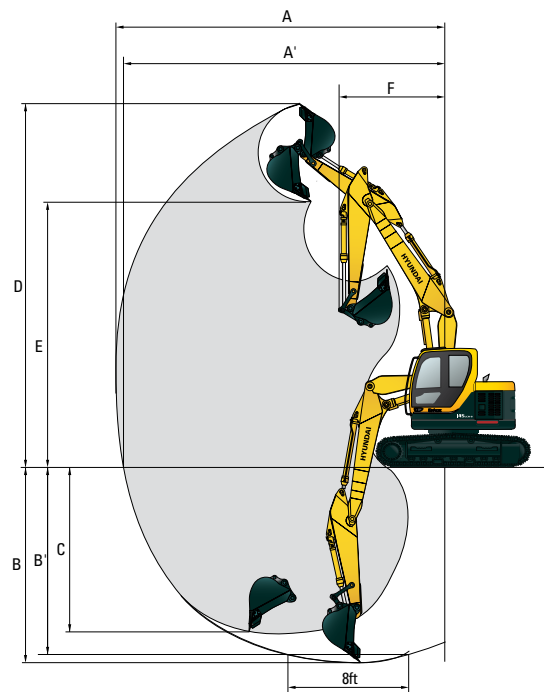

		Boom length			4,900(16' 1")
		Arm length		2,100 (6' 11")	2,500 (8' 2")
A	Max. digging reach	8,270 (27' 2")	8,675 (28' 6")		
A'	Max. digging reach on ground	8,130 (26' 8")	8,540 (28' 0")		
B	Max. digging depth	5,175 (16' 12")	5,580 (18' 4")		
B'	Max. digging depth (8' level)	5,060 (16' 7")	5,470 (17' 11")		
C	Max. vertical wall digging depth	4,555 (14' 11")	5,015 (16' 5")		
D	Max. digging height	9,340 (30' 8")	9,715 (31' 10")		
E	Max. dumping height	6,850 (22' 6")	7,230 (23' 9")		
F	Min. swing radius	2,300 (7' 7")	2,250 (7' 5")		


Dimensions & Working Range

R145LCR-9 ADJUSTABLE BOOM (DOZER TYPE) DIMENSIONS

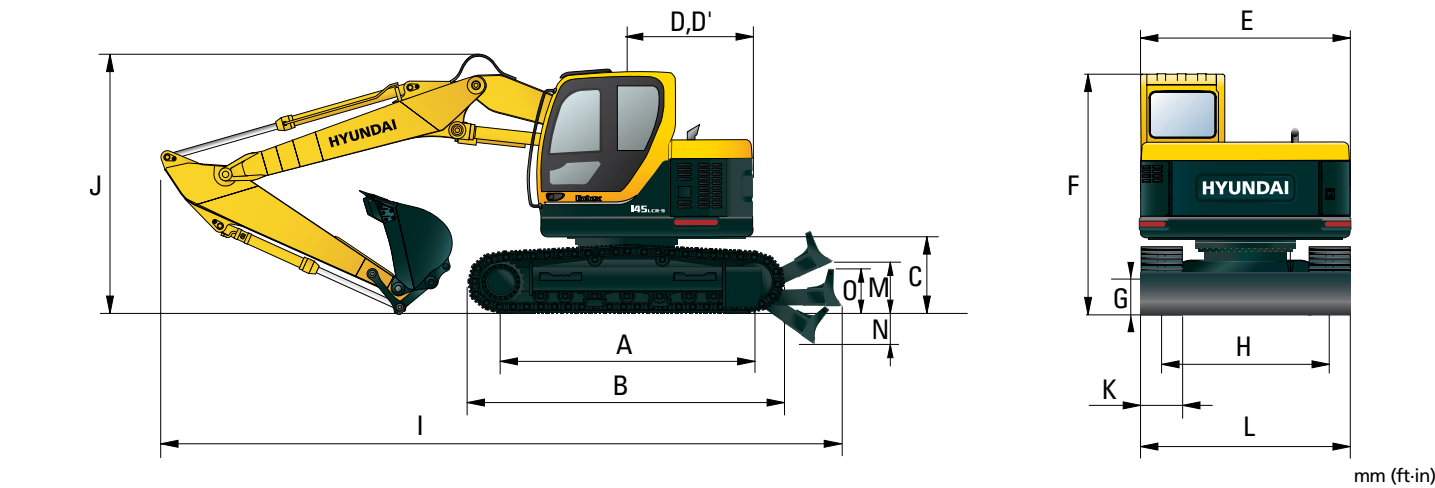

A	Tumbler distance	2,910 (9' 7")	Boom length			4,900(16' 1")
B	Overall length of crawler	3,640 (11' 11")	Arm length		2,100 (6' 11")	2,500 (8' 2")
C	Ground clearance of counterweight	930 (3' 1")	Overall length		8,180 (26' 10")	8,150 (26' 9")
D	Tail swing radius	1,480 (4' 10")	Overall height of boom		2,870 (9' 5")	2,900 (9' 6")
D'	Rear-end length	1,480 (4' 10")				
E	Overall width of upperstructure	2,500 (8' 2")				
F	Overall height of cab	2,900 (9' 6")				
G	Min. ground clearance	440 (1' 5")				
H	Track gauge	2,000 (6' 7")				
M	Ground clearance of blade up	420 (1' 8")				
N	Depth of blade down	430 (1' 6")				
O	Height of blade	575 (1' 8")				
			K	Track shoe width	500 (20")	600 (24")
					700 (28")	
			L	Overall width	2,500 (8' 2")	2,600 (8' 6")
					2,700 (8' 10")	

R145LCR-9 ADJUSTABLE BOOM WORKING RANGE

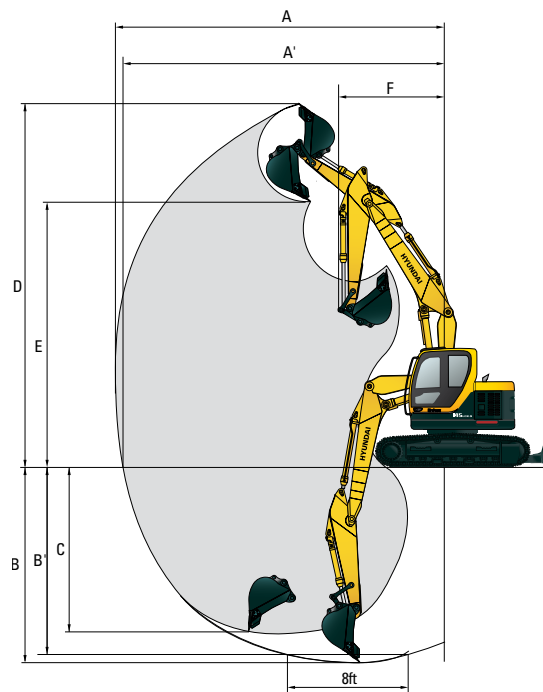

		Boom length			4,900(16' 1")
		Arm length		2,100 (6' 11")	2,500 (8' 2")
A	Max. digging reach	8,270 (27' 2")	8,675 (28' 6")		
A'	Max. digging reach on ground	8,130 (26' 8")	8,540 (28' 0")		
B	Max. digging depth	5,175 (16' 12")	5,580 (18' 4")		
B'	Max. digging depth (8' level)	5,060 (16' 7")	5,470 (17' 11")		
C	Max. vertical wall digging depth	4,555 (14' 11")	5,015 (16' 5")		
D	Max. digging height	9,340 (30' 8")	9,715 (31' 10")		
E	Max. dumping height	6,850 (22' 6")	7,230 (23' 9")		
F	Min. swing radius	2,300 (7' 7")	2,250 (7' 5")		

Lifting Capacity

R145CR-9  Rating over-front  Rating over-side or 360 degree

Boom : 4.6 m (15' 1") / Arm : 1.9 m (6' 3") / Bucket : 0.52 m (0.68 yd) SAE heaped / Shoe : 500mm(20") triple grouser												
Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m (20 ft)	kg					*3270	*3270			3360	2130	5.75
	lb					*7210	*7210			7410	4700	(18.9)
4.5 m (15 ft)	kg			*4960	*4960	*4310	3250			2500	1550	6.73
	lb			*10930	*10930	*9500	7170			5510	3420	(22.1)
3.0m (10 ft)	kg			*7230	5970	4900	3050	2980	1850	2170	1310	7.22
	lb			*15940	13160	10800	6720	6570	4080	4780	2890	(23.7)
1.5 m (5 ft)	kg			*9120	5220	4620	2800	2880	1750	2070	1230	7.32
	lb			*20110	11510	10190	6170	6350	3860	4560	2710	(24.0)
Ground Line	kg			*8610	4970	4430	2640	2800	1680	2170	1290	7.06
	lb			*18980	10960	9770	5820	6170	3700	4780	2840	(23.2)
-1.5 m (-5 ft)	kg	*6830	*6830	*8140	4970	4370	2580			2560	1540	6.40
	lb	*15060	*15060	*17950	10960	9630	5690			5640	3400	(21.0)
-3.0 m (-10 ft)	kg			*6010	5100	*4100	2650			*2250	*2250	5.12
	lb			*13250	11240	*9040	5840			*4960	*4960	(16.8)

Boom : 4.6 m (15' 1") / Arm : 2.1 m (6' 11") / Bucket : 0.52 m (0.68 yd) SAE heaped / Shoe : 500mm(20") triple grouser												
Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m (20 ft)	kg					*3440	3330			3160	2000	5.98
	lb					*7580	7340			6970	4410	(19.6)
4.5 m (15 ft)	kg			*4390	*4390	*4140	3270	*2560	1910	2390	1470	6.92
	lb			*9680	*9680	*9130	7210	*5640	4210	5270	3240	(22.7)
3.0m (10 ft)	kg			*6870	6040	*4840	3060	2990	1850	2080	1240	7.39
	lb			*15150	13320	*10670	6750	6590	4080	4590	2730	(24.2)
1.5 m (5 ft)	kg			*9010	5260	4620	2800	2880	1750	1980	1170	7.49
	lb			*19860	11600	10190	6170	6350	3860	4370	2580	(24.6)
Ground Line	kg			*8870	4940	4410	2610	2780	1660	2070	1220	7.24
	lb			*19550	10890	9720	5750	6130	3660	4560	2690	(23.8)
-1.5 m (-5 ft)	kg	*6560	*6560	*8340	4900	4330	2550	2750	1630	2410	1440	6.60
	lb	*14460	*14460	*18390	10800	9550	5620	6060	3590	5310	3170	(21.7)
-3.0 m (-10 ft)	kg	*9060	*9060	*6360	5020	*4350	2600			*2390	2070	5.38
	lb	*19970	*19970	*14020	11070	*9590	5730			*5270	4560	(17.7)

Boom : 4.6 m (15' 1") / Arm : 2.5 m (8' 2") / Bucket : 0.52 m (0.68 yd) SAE heaped / Shoe : 500mm(20") triple grouser												
Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m (20 ft)	kg					*2960	*2960			2710	1700	6.50
	lb					*6530	*6530			5970	3750	(21.3)
4.5 m (15 ft)	kg					*3460	3310	*2670	1930	2120	1280	7.37
	lb					*7630	7300	*5890	4250	4670	2820	(24.2)
3.0m (10 ft)	kg			*6090	*6090	*4480	3090	2990	1850	1870	1090	7.81
	lb			*13430	*13430	*9880	6810	6590	4080	4120	2400	(25.6)
1.5 m (5 ft)	kg			*8480	5380	4640	2810	2870	1730	1780	1030	7.90
	lb			*18700	11860	10230	6190	6330	3810	3920	2270	(25.9)
Ground Line	kg			*9050	4920	4390	2590	2750	1630	1850	1060	7.67
	lb			*19950	10850	9680	5710	6060	3590	4080	2340	(25.2)
-1.5 m (-5 ft)	kg	*5850	*5850	*8700	4820	4280	2490	2700	1580	2120	1240	7.07
	lb	*12900	*12900	*19180	10630	9440	5490	5950	3480	4670	2730	(23.2)
-3.0 m (-10 ft)	kg	*8930	*8930	*7030	4900	4300	2510			*2400	1700	5.97
	lb	*19690	*19690	*15500	10800	9480	5530			*5290	3750	(19.6)
-4.5 m (-15 ft)	kg			*3750	*3750							
	lb			*8270	*8270							

Boom : 4.6 m (15' 1") / Arm : 3.0 m (9' 10") / Bucket : 0.52 m (0.68 yd) SAE heaped / Shoe : 500mm(20") triple grouser												
Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Reach
												m (ft)
6.0 m (20 ft)	kg					*2560	*2560	*1730	*1730			7.07
	lb					*5640	*5640	*3810	*3810			(23.2)
4.5 m (15 ft)	kg					*2760	*2760	*2550	1980			7.86
	lb					*6080	*6080	*5620	4370			(25.8)
3.0m (10 ft)	kg			*3690	*3690	*3690	3170	3030	1880	*1430	1180	8.27
	lb			*8140	*8140	*8140	6990	6680	4140	*3150	2600	(27.1)
1.5 m (5 ft)	kg			*7740	5620	4720	2880	2890	1750	1950	1130	8.36
	lb			*17060	12390	10410	6350	6370	3860	4300	2490	(27.4)
Ground Line	kg			*9180	5020	4440	2630	2760	1630	*1830	1080	8.14
	lb			*20240	11070	9790	5800	6080	3590	*4030	2380	(26.7)
-1.5 m (-5 ft)	kg	*5380	*5380	*8930	4820	4280	2490	2680	1560			7.59
	lb	*11860	*11860	*19690	10630	9440	5490	5910	3440			(24.9)
-3.0 m (-10 ft)	kg	*7860	*7860	*7790	4830	4250	2460	2680	1560			6.59
	lb	*17330	*17330	*17170	10650	9370	5420	5910	3440			(21.6)
-4.5 m (-15 ft)	kg	*8050	*8050	*5160	5020	*3260	2580					
	lb	*17750	*17750	*11380	11070	*7190	5690					

1. Lifting capacity is based on SAE J1097, ISO 10567.
2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The load point is a hook located on the back of the bucket.
4. (*) indicates the load limited by hydraulic capacity.

Lifting Capacity

R145LCR-9  Rating over-front  Rating over-side or 360 degree

Boom : 4.6 m (15' 1") / Arm : 1.9 m (6' 3") / Bucket : 0.52 m (0.68 yd) SAE heaped / Shoe : 500mm(20") triple grouser												
Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg					*3270	*3270			3710	2160	5.75
(20 ft)	lb					*7210	*7210			8180	4760	(18.9)
4.5 m	kg			*4960	*4960	*4310	3290			2770	1570	6.73
(15 ft)	lb			*10930	*10930	*9500	7250			6110	3460	(22.1)
3.0m	kg			*7230	6040	*5000	3090			2410	1330	7.22
(10 ft)	lb			*15940	13320	*11020	6810	3310	1870	5310	2930	(23.7)
1.5 m	kg			*9120	5290	5160	2840	3200	1780	2310	1250	7.32
(5 ft)	lb			*20110	11660	11380	6260	7050	3920	5090	2760	(24.0)
Ground	kg			*8610	5040	4960	2670	3120	1700	2420	1310	7.06
Line	lb			*18980	11110	10930	5890	6880	3750	5340	2890	(23.2)
-1.5 m	kg	*6830	*6830	*8140	5030	4900	2620			2850	1560	6.40
(-5 ft)	lb	*15060	*15060	*17950	11090	10800	5780			6280	3440	(21.0)
-3.0 m	kg			*6010	5170	*4100	2690			*2250	*2250	5.12
(-10 ft)	lb			*13250	11400	*9040	5930			*4960	*4960	(16.8)

Lifting Capacity

R145CR-9 (DOZER TYPE)

Boom : 4.6 m (15' 1") / Arm : 1.9 m (6' 3") / Bucket : 0.52 m ³ (0.68 yd) ³ SAE heaped / Shoe : 500mm(20") triple grouser												
Load point height m (ft)		Load radius						At max. reach				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg					*3270	*3270			3660	2270	5.75
(20 ft)	lb					*7210	*7210			8070	5000	(18.9)
4.5 m	kg			*4960	*4960	*4310	3440			2750	1660	6.73
(15 ft)	lb			*10930	*10930	*9500	7580			6060	3660	(22.1)
3.0m	kg			*7230	6310	*5000	3240	3260	1980	2390	1410	7.22
(10 ft)	lb			*15940	13910	*11020	7140	7190	4370	5270	3110	(23.7)
1.5 m	kg			*9120	5560	5040	2990	3160	1890	2290	1330	7.32
(5 ft)	lb			*20110	12260	11110	6590	6970	4170	5050	2930	(24.0)
Ground	kg			*8610	5300	4850	2820	3080	1810	2400	1400	7.06
Line	lb			*18980	11680	10690	6220	6790	3990	5290	3090	(23.2)
-1.5 m	kg	*6830	*6830	*8140	5300	4790				2820	1660	6.40
(-5 ft)	lb	*15060	*15060	*17950	11680	10560	6110			6220	3660	(21.0)
-3.0 m	kg			*6010	5440	*4100	2840			*2250	*2840	5.12
(-10 ft)	lb			*13250	11990	*9040	6260			*4960	*4960	(16.8)

Boom : 4.6 m (15' 1") / Arm : 2.1 m (6' 11") / Bucket : 0.52 m³ (0.68 yd)³ SAE heaped / Shoe : 500mm(20") triple grouser

Load point height m (ft)		Load radius						At max. reach				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg					*3440	*3440			3440	2130	5.98
(20 ft)	lb					*7580	*7580			7580	4700	(19.6)
4.5 m	kg			*4390	*4390	*4140	3460	*2560	2040	2620	1580	6.92
(15 ft)	lb			*9680	*9680	*9130	7630	*5640	4500	5780	3480	(22.7)
3.0m	kg			*6870	1980	*4840	3250	3270	1980	2290	1350	7.39
(10 ft)	lb			*15150	14040	*10670	7170	7210	4370	5050	2980	(24.2)
1.5 m	kg			*9010	5600	5040	2990	3160	1880	2190	1270	7.49
(5 ft)	lb			*19860	12350	11110	6590	6970	4140	4830	2800	(24.6)
Ground	kg			*8870	5270	4830	2800	3060	1790	2290	1320	7.24
Line	lb			*19550	11620	10650	6170	6750	3950	5050	2910	(23.8)
-1.5 m	kg	*6560	*6560	*8340	5240	4750	2740	3030	1760	2660	1550	6.60
(-5 ft)	lb	*14460	*14460	*18390	11550	10470	6040	6680	3880	5860	3420	(21.7)
-3.0 m	kg	*9060	*9060	*6360	5360	*4350	2790			*2390	2220	5.38
(-10 ft)	lb	*19970	*19970	*14020	11820	*9590	6150			*5270	4890	(17.7)

Boom : 4.6 m (15' 1") / Arm : 2.5 m (8' 2") / Bucket : 0.52 m³ (0.68 yd)³ SAE heaped / Shoe : 500mm(20") triple grouser

Load point height m (ft)		Load radius						At max. reach				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg					*2960	*2960			*2910	1820	6.50
(20 ft)	lb					*6530	*6530			*6420	4010	(21.3)
4.5 m	kg					*3460	*3460	*2670	2060	2340	1380	7.37
(15 ft)	lb					*7630	*7630	*5890	4540	5160	3040	(24.2)
3.0m	kg			*6090	*6090	*4480	3280	3270	1980	2070	1190	7.81
(10 ft)	lb			*13430	*13430	*9880	7230	7210	4370	4560	2620	(25.6)
1.5 m	kg			*8480	5720	5060	3000	3150	1860	1980	1120	7.90
(5 ft)	lb			*18700	12610	11160	6610	6940	4100	4370	2470	(25.9)
Ground	kg			*9170	5260	4810	2780	3030	1760	2060	1160	7.67
Line	lb			*20220	11600	10600	6130	6680	3880	4540	2560	(25.2)
-1.5 m	kg	*5850	*5850	*8700	5160	4700	2680	2980	1710	2350	1340	7.07
(-5 ft)	lb	*12900	*12900	*19180	11380	10360	5910	6570	3770	5180	2950	(23.2)
-3.0 m	kg	*8930	*8930	*7030	5230	4720	2700			*2400	1830	5.97
(-10 ft)	lb	*19690	*19690	*15500	11530	10410	5950			*5290	4030	(19.6)
-4.5 m	kg			*3750								
(-15 ft)	lb			*8270	*8270							

Boom : 4.6 m (15' 1") / Arm : 3.0 m (9' 10") / Bucket : 0.52 m³ (0.68 yd)³ SAE heaped / Shoe : 500mm(20") triple grouser

Load point height m (ft)		Load radius						At max. reach				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Reach
												m (ft)
6.0 m	kg					*2560	*2560	*1730	*1730			7.07
(20 ft)	lb					*5640	*5640	*3810	*3810			(23.2)
4.5 m	kg					*2760	*2760	*2550	2110			7.86
(15 ft)	lb					*6080	*6080	*5620	4650			(25.8)
3.0m	kg			*3690	*3690	*3690	3360	*3210	2020	*1430	1280	8.27
(10 ft)	lb			*8140	*8140	*8140	7410	*7080	4450	*3150	2820	(27.1)
1.5 m	kg			*7740	5950	*5030	3070	3170	1890	*1990	1230	8.36
(5 ft)	lb			*17060	13120	*11090	6770	6990	4170	*4390	2710	(27.4)
Ground	kg			*9180	5360	4850	2820	3040	1770	*1830	1180	8.14
Line	lb			*20240	11820	10690	6220	6700	3900	*4030	2600	(26.7)
-1.5 m	kg	*5380	*5380	*8930	5160	4700	2680	2960	1690			7.59
(-5 ft)	lb	*11860	*11860	*19690	11380	10360	5910	6530	3730			(24.9)
-3.0 m	kg	*7860	*7860	*7790	5170	4670	2650	2960	1690			6.59
(-10 ft)	lb	*17330	*17330	*17170	11400	10300	5840	6530	3730			(21.6)
-4.5 m	kg	*8050	*8050	*5160								
(-15 ft)	lb	*17750	*17750	*11380	*11380	*7190	6110					

1. Lifting capacity is based on SAE J1097, ISO 10567.
2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The load point is a hook located on the back of the bucket.
4. (*) indicates the load limited by hydraulic capacity.

Lifting Capacity

R145LCR-9 (DOZER TYPE)

Boom : 4.6 m (15' 1") / Arm : 1.9 m (6' 3") / Bucket : 0.52 m ³ (0.68 yd) ³ SAE heaped / Shoe : 500mm(20") triple grouser												
Load point height m (ft)		Load radius						At max. reach				
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg					*3270	*3270			*3720	2300	5.75
(20 ft)	lb					*7210	*7210			*8200	5070	(18.9)
4.5 m	kg			*4960	*4960	*4310	3480			2960	1680	6.73
(15 ft)	lb			*10930	*10930	*9500	7670			6530	3700	(22.1)
3.0m	kg			*7230	6370	*5000	3280	3530	2000	2580	1430	7.22
(10 ft)	lb			*15940	14040	*11020	7230	7780	4410	5690	3150	(23.7)
1.5 m	kg			*9120	5630	5490	3030	3430	1910	2480	1360	7.32
(5 ft)	lb			*20110	12410	12100	6680	7560	4210	5470	3000	(24.0)
Ground	kg			*8610	5370	5300	2860	3340	1840	2600	1420	7.06
Line	lb			*18980	11840	11680	6310	7360	4060	5730	3130	(23.2)
-1.5 m	kg	*6830	*6830	*8140	5370	5240	2810			3050	1680	6.40
(-5 ft)	lb	*15060	*15060	*17950	11840	11550	6190			6720	3700	(21.0)
-3.0 m	kg			*6010	5510	*4100	2880			*2250	*2250	5.12
(-10 ft)	lb			*13250	12150	*9040	6350			*4960	*4960	(16.8)

Boom : 4.6 m (15' 1") / Arm : 2.1 m (6' 11") / Bucket : 0.52 m³ (0.68 yd)³ SAE heaped / Shoe : 500mm(20") triple grouser

Load point height m (ft)		Load radius								At max. reach			
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach	
												m (ft)	
6.0 m	kg					*3440	*3440			*3550	2160	5.98	
(20 ft)	lb					*7580	*7580			*7830	4760	(19.6)	
4.5 m	kg			*4390	*4390	*4140	3500	*2560	2070	2830	1600	6.92	
(15 ft)	lb			*9680	*9680	*9130	7720	*5640	4560	6240	3530	(22.7)	
3.0m	kg			*6870	6440	*4840	3290	3530	2010	2480	1370	7.39	
(10 ft)	lb			*15150	14200	*10670	7250	7780	4430	5470	3020	(24.2)	
1.5 m	kg			*9010	5670	5490	3030	3420	1900	2380	1290	7.49	
(5 ft)	lb			*19860	12500	12100	6680	7540	4190	5250	2840	(24.6)	
Ground	kg			*8870	5340	5280	2840	3320	1820	2480	1340	7.24	
Line	lb			*19550	11770	11640	6260	7320	4010	5470	2950	(23.8)	
-1.5 m	kg	*6560	*6560	*8340	5310	5200	2770	3290	1790	2880	1580	6.60	
(-5 ft)	lb	*14460	*14460	*18390	11710	11460	6110	7250	3950	6350	3480	(21.7)	
-3.0 m	kg	*9060	*9060	*6360	5430	*4350	2820			*2390	2250	5.38	
(-10 ft)	lb	*19970	*19970	*14020	11970	*9590	6220			*5270	4960	(17.7)	

Lifting Capacity

R145LCR-9 ADJUSTABLE BOOM

 Rating over-front  Rating over-side or 360 degree

Boom : 4.9 m (16' 1") / Arm : 2.1 m (6' 11") / Bucket : 0.52 m (0.68 yd) SAE heaped / Shoe : 500mm(20") triple grouser												
Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg	*3440	*3440	*3680	*3680	*3490	3410			3050	1730	6.46
(20 ft)	lb	*7580	*7580	*8110	*8110	*7690	7520			6720	3810	(21.2)
4.5 m	kg	*3330	*3330	*4400	*4400	*3800	3300	*3400	1940	2380	1300	7.33
(15 ft)	lb	*7340	*7340	*9700	*9700	*8380	7280	*7500	4280	5250	2870	(24.0)
3.0m	kg			*6780	5910	*4560	3030	3300	1840	2100	1110	7.77
(10 ft)	lb			*14950	13030	*10050	6680	7280	4060	4630	2450	(25.5)
1.5 m	kg					5080	2740	3170	1720	2010	1050	7.87
(5 ft)	lb					11200	6040	6990	3790	4430	2310	(25.8)
Ground	kg			*5890	4810	4860	2550	3060	1620	2100	1090	7.63
Line	lb			*12990	10600	10710	5620	6750	3570	4630	2400	(25.0)
-1.5 m	kg			*8270	4820	4790	2490	3020	1590			
(-5 ft)	lb			*18230	10630	10560	5490	6660	3510			

Boom : 4.9 m (16' 1") / Arm : 2.5 m (8' 2") / Bucket : 0.52 m (0.68 yd) SAE heaped / Shoe : 500mm(20") triple grouser													
Load point height m (ft)		Load radius										At max. reach	
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity	Reach
													m (ft)
6.0 m	kg	*2580	*2580	*2970	*2970	*3100	*3100	*2050	1970			2660	1480
(20.0 ft)	lb	*5690	*5690	*6550	*6550	*6830	*6830	*4520	4340			5860	3260
4.5 m	kg	*2210	*2210	*3110	*3110	*3430	3340	*3140	1960			2130	1140
(15.0 ft)	lb	*4870	*4870	*6860	*6860	*7560	7360	*6920	4320			4700	2510
3.0m	kg			*6010	*6010	*4220	3070	3310	1850			1900	970
(10.0 ft)	lb			*13250	*13250	*9300	6770	7300	4080			4190	2140
1.5 m	kg			*7630	5190	5110	2760	3160	1710	2150	1110	1820	920
(5.0 ft)	lb			*16820	11440	11270	6080	6970	3770	4740	2450	4010	2030
Ground	kg			*6220	4780	4850	2530	3030	1590			1890	950
Line	lb			*13710	10540	10690	5580	6680	3510			4170	2090
-1.5 m	kg			*8430	4720	4730	2430	2970	1540			2130	1090
(-5.0 ft)	lb			*18580	10410	10430	5360	6550	3400			4700	2400
-3.0 m	kg					4760	2450						
(-10.0 ft)	lb					10490	5400						

1. Lifting capacity is based on SAE J1097, ISO 10567.
2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The load point is a hook located on the back of the bucket.
4. (*) indicates the load limited by hydraulic capacity.

Lifting Capacity

R145LCR-9 ADJUSTABLE BOOM (DOZER TYPE)

 Rating over-front  Rating over-side or 360 degree

Boom : 4.9 m (16' 1") / Arm : 2.1 m (6' 11") / Bucket : 0.52 m (0.68 yd) SAE heaped / Shoe : 500mm(20") triple grouser												
Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		Capacity		Reach
												m (ft)
6.0 m	kg	*3440	*3440	*3680	*3680	*3490	*3490				*3150	1860
(20 ft)	lb	*7580	*7580	*8110	*8110	*7690	*7690				*6940	4100
4.5 m	kg	*3330	*3330	*4400	*4400	*3800	3490	*3400	2070	2620	1410	7.33
(15 ft)	lb	*7340	*7340	*9700	*9700	*8380	7690	*7500	4560	5780	3110	(24.0)
3.0m	kg			*6780	6240	*4560	3220	3610	1980	2320	1210	7.77
(10 ft)	lb			*14950	13760	*10050	7100	7960	4370	5110	2670	(25.5)
1.5 m	kg					*5380	2930	3470	1850	2230	1140	7.87
(5 ft)	lb					*11860	6460	7650	4080	4920	2510	(25.8)
Ground	kg			*5890	5150	5320	2740	3360	1760	2320	1190	7.63
Line	lb			*12990	11350	11730	6040	7410	3880	5110	2620	(25.0)
-1.5 m	kg			*8270	5160	5250	2680	3320	1720			
(-5 ft)	lb			*18230	11380	11570	5910	7320	3790			

Boom : 4.9 m (16' 1") / Arm : 2.5 m (8' 2") / Bucket : 0.52 m (0.68 yd) SAE heaped / Shoe : 500mm(20") triple grouser													
Load point height m (ft)		Load radius										At max. reach	
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity	Reach
													m (ft)
6.0 m	kg	*2580	*2580	*2970	*2970	*3100	*3100	*2050	*2050			*2890	1590
(20.0 ft)	lb	*5690	*5690	*6550	*6550	*6830	*6830	*4520	*4520			*6370	3510
4.5 m	kg	*2210	*2210	*3110	*3110	*3430	*3430	*3140	2090			2350	1240
(15.0 ft)	lb	*4870	*4870	*6860	*6860	*7560	*7560	*6920	4610			5180	2730
3.0m	kg			*6010	*6010	*4220	3260	*3450	1980			2100	1070
(10.0 ft)	lb			*13250	*13250	*9300	7190	*7610	4370			4630	2360
1.5 m	kg			*7630	5520	*5120	2950	3460	1840	*2330	1210	2020	1010
(5.0 ft)	lb			*16820	12170	*11290	6500	7630	4060	*5140	2670	4450	2230
Ground	kg			*6220	5120	5300	2720	3330	1730			2090	1040
Line	lb			*13710	11290	11680	6000	7340	3810			4610	2290
-1.5 m	kg			*8430	5060	5190	2620	3270	1670			2360	1190
(-5.0 ft)	lb			*18580	11160	11440	5780	7210	3680			5200	2620
-3.0 m	kg					*5000	2640						
(-10.0 ft)	lb					*11020	5820						

1. Lifting capacity is based on SAE J1097, ISO 10567.
2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The load point is a hook located on the back of the bucket.
4. (*) indicates the load limited by hydraulic capacity.