

STANDARD EQUIPMENT

ISO Standard cabin
All-weather steel cab with 360° visibility
Safety glass windows
Rise-up type windshield wiper
Sliding side window(LH)
Lockable door
Hot & cool box
Storage compartment & Ashtray
Transparent cabin roof-cover
Radio / USB Player
12 volt power outlet (24V DC to 12V DC converter)
Handsfree mobile phone system with USB
Sun visor
Computer aided power optimization (New CAPO) system
3-power mode, 2-work mode, User mode
Auto deceleration & one-touch deceleration system
Auto warm-up system
Auto overheat prevention system
Automatic climate control
Air conditioner & heater
Defroster
Self-diagnostics system
Starting Aid (air grid heater) for cold weather
Centralized monitoring
LCD display
Engine speed or Trip meter/Accel.
Clock
Gauges
Fuel level gauge
Engine coolant temperature gauge
Hyd. oil temperature gauge
Warnings
Check Engine
Overload
Communication error
Low battery
Air cleaner clogging
Indicators
Max power
Low speed/High speed
Fuel warmer
Auto idle
Door and cab locks, one key
Three outside rearview mirrors
Fully adjustable suspension seat with seat belt
Pilot-operated slidable joystick
Console box height adjust system
Four front working lights
Electric horn
Batteries (2 x 12V x 100 AH)
Battery master switch
Removable clean-out dust net for cooler
Automatic swing brake
Removable reservoir tank
Fuel pre-filter with fuel warmer
Boom holding system
Arm holding system
Track shoes (600mm, 24")
Track rail guard
Accumulator for lowering work equipment
Electric transducer
Lower frame under cover (Normal)

OPTIONAL EQUIPMENT

Fuel filler pump (35 L/min)
Beacon lamp
Safety lock valve for boom cylinder with overload warning device
Safety lock valve for arm cylinder
Single-acting piping kit (breaker, etc.)
Double-acting piping kit (clamshell, etc.)
Quick coupler
Travel alarm
Booms
5.1m, 16' 9"
5.1m, 16' 9" (Hydraulic adjustable boom)
Arms
2.2m, 7' 3"
2.6m, 8' 6"
3.1m, 10' 2"
Climate control
Air conditional only
Heater only
Cabin FOPS/FOG (ISO/DIS 10262-Level II)
FOPS (Falling Object Protective Structure)
FOG (Falling Object Guard)
Cabin ROPS (ISO 12117-2)
ROPS (Roll-over Protective Structure)
Cabin Guard front
Wire net
Fine net
Cabin roof-steel cover
Cabin lights
Cabin front window rain guard
Track shoes
Triple grousers shoe (500mm, 20")
Triple grousers shoe (700mm, 28")
R160LCD-9 Blade : 640mm(2' 1") x 2,490mm(8' 2")
640mm(2' 1") x 2,590mm(8' 6")
Lower frame under cover(Additional)
Tool kit
Operator suit
Rearview camera
Seat
Adjustable air suspension seat
Adjustable air suspension seat with heater
Mechanical suspension seat
Pattern change valve (2 patterns)
Hi-mate (Remote Management System)

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.

* The photos may include attachments and optional equipment that are not available in your area.

* Materials and specifications are subject to change without advance notice.

* All imperial measurements rounded off to the nearest pound or inch.

PLEASE CONTACT

 **HYUNDAI**
HEAVY INDUSTRIES CO.,LTD.
CONSTRUCTION EQUIPMENT

Head Office
1000 BANGEOJINSUNHWAN-DORO, DONG-GU, ULSAN, 682-792, KOREA
TEL:(82)52-202-7722, 9807 FAX:(82)52-202-7720



We build a better future

Robex
160LC-9
With Tier 3 Engine installed



*Photo may include optional equipment.

Pride at Work

Hyundai Heavy Industries strives to build state-of-the art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality. Take pride in your work with Hyundai!

Robex 160LC-9

Machine Walk-Around

Engine Technology

Proven / reliable, fuel efficient Mitsubishi Tier III D04FD-TAA engine
Electronically controlled for optimum fuel to air ratio and clean, efficient combustion
Low noise / Auto engine overheat feature / Anti-restart feature

Hydraulic System Improvements

New patented hydraulic control for improved controllability / Improved control valve design for added efficiency and smoother operation / New auto boom and swing priority system for optimum speed / New auto power boost feature for additional power when needed / Improved arm-in and boom-down flow regeneration system for added speed and efficiency

Pump Compartment

Industry-leading, powerful, reliable Kawasaki designed, variable volume in-line axial piston pumps
New compact solenoid block equipped with 3 solenoid valves, 1 EPPR valve, 1 check valve accumulator and pilot filter controls 2 speed travel, power boost, boom priority, safety lock

Enhanced Operator Cab

Improved Visibility

Enlarged cab with improved visibility / See-through upper skylight for visibility and ventilation
Larger right-side glass, now one piece, for better right visibility
Safety glass windows on all sides - less expensive than (polycarbonate) and won't scratch or fade
Closeable sunshade for operator convenience / Reduced front window seam for improved operator view

Improved Cab Construction

New steel tube construction for added operator safety, protection and durability
New window open/close mechanism designed with cable and spring lift assist and single latch release

Improved Suspension Seat / Console Assembly

Ergonomic joysticks with auxiliary control buttons for attachment use. Now with new sleek styling
Heated suspension (standard) or optional air ride suspension with heat
New joystick consoles - now adjustable in height by way of dial at bottom
Adjustable arm rests - turn dial to raise or lower for optimum comfort

Advanced 7" Color Cluster

New Color LCD Display with easy to read digital gauges for hydraulic oil temperature, water temperature, and fuel. Simplified design makes adjustment and diagnostics easier. Also, new enhanced features such as rear-view camera are integrated into monitor.
3 power modes : (P) Power, (S) Standard, (E) Economy, 2 work modes : Dig & Attachment, (U) User mode for operator preference
Enhanced self-diagnostic features with GPS download capability
One pump flow or two pump flow for optional attachment is now selectable through the cluster / New anti-theft system with password capability
Boom speed and arm regeneration are selectable through the monitor.
Auto power boost is now available - selectable (on/off) through the monitor.
Powerful air conditioning and heat with auto climate control, 20% more heat and air output than 7A series!
RMS (Remote Management System) works through GPS/satellite technology to ultimately provide better customer service and support.

Undercarriage

Sealed track chain (urethane seals) / Standard track rail guard / Comfortable bolt-on steps
Large upper roller cut-outs for debris clean-out / Tapered side frames for debris clean-out / Grease-type track tensioner

*Photo may include optional equipment.

Preference

Operating a 9 series is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.

Operator Comfort

In 9 series cabin you can easily adjust the seat, console and armrest settings to best suit your preferred comfort level. Seat and console position and height can be set together and independent from each other. Other preference settings that add to overall operator comfort include the full automatic high capacity airconditioning system and the Radio / USB player.



Reduced Stress

Work is stressful enough. Your work environment should be stress free. Hyundai's 9 series provides improved cab amenities, additional space and a comfortable seat to minimize stress to the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with USB player, AM/FM stereo and, plus remotely located controls is perfect for listening to music favorites. Operators can even talk on the phone with the hands-free cell phone feature.



Operator - Friendly Cluster

The advanced new cluster with 7 inch wide color LCD screen and toggle switch allows the operator to select his personal machine preferences. Power and work mode selection, self diagnostics, optional rear-view camera, maintenance check lists, start-up machine security, and video functions were integrated into the cluster to make the machine more versatile and the operator more productive.



*Photo may include optional equipment.



Wide Cabin with Excellent Visibility

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. Special attention was given to a clear, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand. This well balanced combination of precision aspects put the operator in the perfect position to work safely and securely.

Precision

Innovative hydraulic system technologies make the 9 series excavator fast, smooth and easy to control.



*Photo may include optional equipment.

Computer Aided Power

The engine horsepower and hydraulic horsepower together in unison through the advanced CAPO(Computer Aided Power Optimization) system, flow for the job at hand. Operator can set their own preferences for boom or swing priority, power mode selection and optional work tools at the touch of a button.

The CAPO system also provides complete self diagnostic features and digital gauges for important information like hydraulic oil temperature, water temperatures and fuel level. This system interfaces with multiple sensors placed throughout the hydraulic system as well as the electronically controlled engine to provide the optimum level of engine power and hydraulic flow.

Power Mode

P (Power Max) mode maximizes machine speed and power for mass production. S (Standard) mode provides a reduced, fixed rpm for optimum performance and improved fuel economy. For maximum fuel savings and improved control, E (Economy) mode provides precise flow and engine power based on load demand. Three unique power modes provide the operator with custom power, speed and fuel economy.

Work Mode

The work mode allows the operator to select single flow attachments like a hydraulic breaker or bi-directional flow attachments like a crusher. Flow settings unique to each attachment can be programmed from within the cluster.

User Mode

Some jobs require more precise machine settings. Using the versatile U (User) mode, the operator can customize engine speed, pump output, idle speed and other machine settings for the job at hand.

Improved Hydraulic System



To achieve optimum precision, Hyundai redesigned the hydraulic system to provide the operator with super fine touch and improved controllability. Improved pump flow control reduces flow when controls are not being used to minimize fuel consumption.

Improved spool valves in the control valve are engineered to provide more precise flow to each function with less effort.

Improved hydraulic valves, precision-designed variable volume piston pumps, fine-touch pilot controls, and enhanced travel functions make any operator running a 9

series look like a smooth operator. Newly improved features include arm-in and boom-down flow regeneration, improved control valve technology and innovative auto boom and swing priority for optimal performance in any application.



Auto Boom-swing Priority

This smart function automatically and continuously looks the ideal hydraulic flow balance for the boom and swing motions of the machine. The advanced CAPO system monitors the hydraulic system and adjusts its settings to maximize performance and productivity.

Performance

9 series is designed for maximum performance to keep the operator working productively.

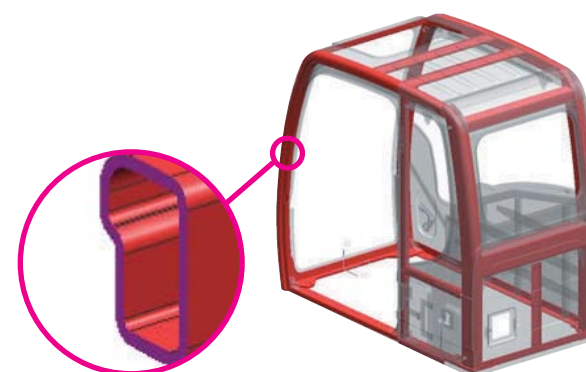


*Photo may include optional equipment.

Track Rail Guard & Adjusters

adjustment is made easy with standard grease cylinder track adjusters and shock absorbing springs.

Durable track rail guards keep track links in place. Track



Structure Strength

The 9 series cabin structure has been fitted with stronger but slimmer tubing for more safety and improved visibility. Low-stress, high strength steel is integrally welded to form a stronger, more durable upper and lower frame. Structural integrity was tested by way of FEM (Finite Elements Method) analysis and long-term durability tests.

The optional ROPS(Roll Over Protective Structure) cab can be equipped to enhance operator safety.



Easy to maintain engine components

The cooling and preheating system are provided for optimum and immediate operation, guaranteeing longer life for the engine and hydraulic components.

Servicing of the engine and hydraulics is considerably simplified due to total accessibility.

Mitsubishi D04FD-TAA

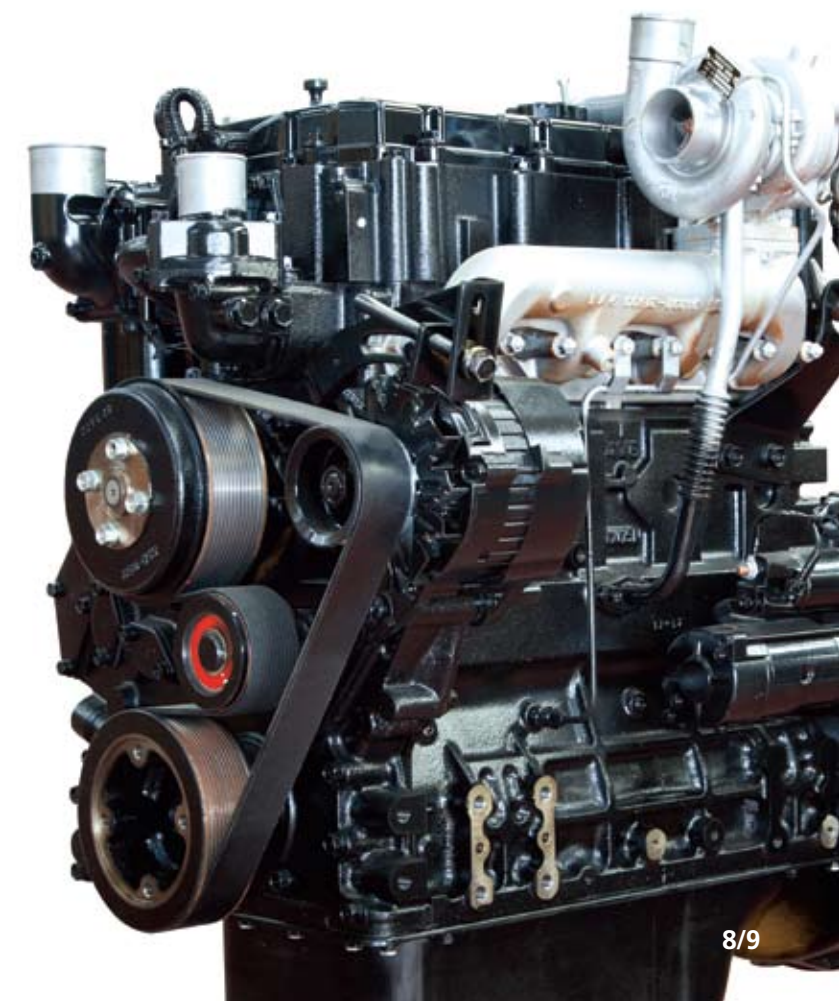
The Tier III, four cylinder, 4 cycle, turbo-charged, charge air cooled, Mitsubishi D04FD-TAA engine provides maximum power, reliability, optimum fuel economy, and reduced emissions. Electronically controlled fuel injection and diagnostic capabilities add to the engines efficiency and serviceability.

Heavy-duty strength

Everyone who's ever worked on construction equipment knows, there is no substitute for power and durability. The D04FD-TAA handles the toughest loads and the roughest work conditions.

At the same time, it delivers better fuel economy, has better cold starting capability and is up to 50% quieter in operation. Plus, the heavy-duty design of the D04FD-TAA engine block and components add reliability and durability you can count on every day, year after year.

Both fuel-efficiency and response are significantly enhanced with the Mitsubishi high pressure common rail fuel system. The system delivers high pressure injection, independent of engine speed, for optimum performance and flexibility at every rpm.



Profitability

9 series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.



*Photo may include optional equipment.



Hi-mate (Remote Management System)

Hi-mate, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi-mate saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.



Fuel Efficiency

9 series excavators are engineered to be extremely fuel efficient. New innovations like fan clutch, the variable speed remote fan, two-stage auto decel system and the new economy mode help to conserve fuel and reduce the impact on the environment.



Easy Access

Ground-line access to filters, lube fittings, fuses, machine computer components and wide open compartments makes service more convenient on the 9 series.



Long-Life Components

9 series excavators were designed with bushings designed for long-life lube intervals (250 hrs) & polymer shims (wear resistant, noise reducing), long-life hydraulic filters (1,000hrs), long-life hydraulic oil (5,000hrs), more efficient cooling systems and integrated preheating systems which extend service intervals, minimize operating costs and reduce machine down time.

Specifications

ENGINE

MODEL			Mitsubishi D04FD-TAA
Type			Water cooled, 4 cycle Diesel, 4-cylinders in line, direct injection, turbocharged charger and air cooled
Rated flywheel horse power	SAE	J1995 (gross) J1349 (net)	126 HP (94 kW)/ 2,000 rpm 120 HP (90 kW)/ 2,000 rpm
	DIN	6271/1 (gross) 6271/1 (net)	128 PS (94 kW)/ 2,000 rpm 122 PS (90 kW)/ 2,000 rpm
Max. torque			47.7 kgf·m(345 lbf·ft)/ 1,800 rpm
Bore X stroke			102 x 130 mm (4.01" x 5.12")
Piston displacement			4,249cc (259.3 in ³)
Batteries			2 X 12V X 100AH
Starting motor			24V- 5.0kW
Alternator			24V- 50Amp

HYDRAULIC SYSTEM

MAIN PUMP	
Type	Variable displacement piston pumps
Rated flow	2 X 160L /min (44.4 US gpm / 37.0 UK gpm)
Sub-pump for pilot circuit	Gear pump
Cross-sensing and fuel saving pump system.	

HYDRAULIC MOTORS	
Travel	Two speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING	
Implement circuits	350 kgf/cm ² (4,980 psi)
Travel	350 kgf/cm ² (4,980 psi)
Power boost (boom, arm, bucket)	380 kgf/cm ² (5,410 psi)
Swing circuit	285 kgf/cm ² (4,050 psi)
Pilot circuit	40 kgf/cm ² (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS	
No. of cylinder bore X stroke	Boom: 2-115 X 1,090 mm (4.5"X 42.9")
	Arm: 1-120 X 1,355 mm (4.7" X 53.3")
	Bucket: 1-110 X 995 mm (4.3" X 39.2")
	Blade: 2-110 X 320 mm (4.3" X 12.6")
	2PCS 1st: 2-115 X 960 mm (4.5" X 37.8") 2nd: 1-160 X 650 mm (6.3" X 25.6")

DRIVES & BRAKES

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor, in-shoe design
Reduction system	Planetary reduction gear
Max. drawbar pull	17,000 kgf (37,500 lbf)
Max. travel speed(high) / (low)	5.5 km/hr (3.4 mph) / 3.2 km/hr (2.0 mph)
Gradeability	30° (58 %)
Parking brake	Multi wet disc

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket(ISO)
Traveling and steering	Two levers with pedals
Engine throttle	Electric, Dial type
Lights	Two lights mounted on the boom Two on the upper frame

SWING SYSTEM

Swing motor	Two fixed displacement axial pistons motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	11.3 rpm

COOLANT & LUBRICANT CAPACITY

Refilling	liter	US gal	UK gal
Fuel tank	270	71.3	59.4
Engine coolant	15.5	4.1	3.4
Engine oil	17.5	4.6	3.8
Swing device-gear oil	5.0	1.3	1.1
Final drive(each)-gear oil	5.8	1.5	1.3
Hydraulic system(including tank)	240	63.4	52.8
Hydraulic tank	160	42.3	35.2

UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

Center frame	X - leg type
Track frame	Pentagonal box type
No. of shoes on each side	49
No. of carrier roller on each side	2
No. of track roller on each side	7
No. of rail guard on each side	1

OPERATING WEIGHT (APPROXIMATE)








Operating weight, including 5,100mm (16’ 9”) boom, 2,600mm (8’ 6”) arm, SAE heaped 0.70m³ (0.92 yd³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

MAJOR COMPONENT WEIGHT	
Upperstructure	4,980 kg (10,980 lb)
5.1m (16’ 9”)mono boom(with arm cylinder)	1,250 kg (2,760 lb)
Hydraulic adjustable boom(with arm cylinder)	1,780 kg (3,920 lb)

OPERATING WEIGHT				
Shoes			Operating weight	Ground pressure
Type	Width mm(in)		kg(lb)	kgf/cm ² (psi)
Triple grouser	500 (20")	R160LC-9	17,550 (38,690)	0.51 (7.25)
		R160LCD-9	18,550 (40,900)	0.54 (7.68)
		R160LC-9	17,800 (39,240)	0.43 (6.11)
	600 (24")	R160LCD-9	18,800 (41,450)	0.46 (6.54)
		R160LC-9	18,050 (39,790)	0.38 (5.40)
		R160LCD-9	19,050 (42,000)	0.40 (5.69)

BUCKETS

All buckets are welded with high-strength steel.

						
SAE heaped m ³ (yd ³)	0.39(0.51)	0.50(0.65)	0.64(0.84)	0.70(0.92)	0.89(1.16)	<input type="checkbox"/> 0.69(0.90)

Capacity m ³ (yd ³)		Width mm (in)		Weight kg (lb)	Recommendation mm (ft-in)				
SAE heaped	CECE heaped	Without sidecutters	With sidecutters		5,100 (16' 9") Mono Boom			5,100 (16' 9") Hydraulic Adjustable Boom	
					2,200 (7' 3") Arm	2,600 (8' 6") Arm	3,100 (10' 2") Arm	2,200 (7' 3") Arm	2,600 (8' 6") Arm
0.39(0.51)	0.34(0.44)	620(24.4)	740(29.1)	410(900)	●	●	●	●	●
0.50(0.65)	0.44(0.58)	760(29.9)	880(34.6)	470(1,040)	●	●	●	●	●
0.64(0.84)	0.55(0.72)	920(36.2)	1,040(40.9)	510(1,120)	●	●	■	●	■
0.70(0.92)	0.60(0.78)	990(39.0)	1,110(43.7)	540(1,190)	●	■	▲	■	▲
0.89(1.16)	0.77(1.01)	1,220(48.0)	1,340(52.8)	610(1,340)	■	▲	-	▲	-
<input type="checkbox"/> 0.69(0.90)	0.62(0.81)	990(39.0)	-	700(1,540)	●	■	▲	■	▲

□ Heavy duty bucket

- : Applicable for materials with density of 2,000 kg /m³ (3,370 lb/ yd³) or less
- : Applicable for materials with density of 1,600 kg /m³ (2,700 lb/ yd³) or less
- ▲ : Applicable for materials with density of 1,100 kg /m³ (1,850 lb/ yd³) or less

ATTACHMENT

Booms and arms are welded, a low-stress, full-box section design. 5.1m(16’ 9”) boom, 5.1m(16’ 9”) hydraulic adjustable boom and 2.20m(7’ 3”), 2.60m(8’ 6”), 3.10m(10’ 2”) arms are available.

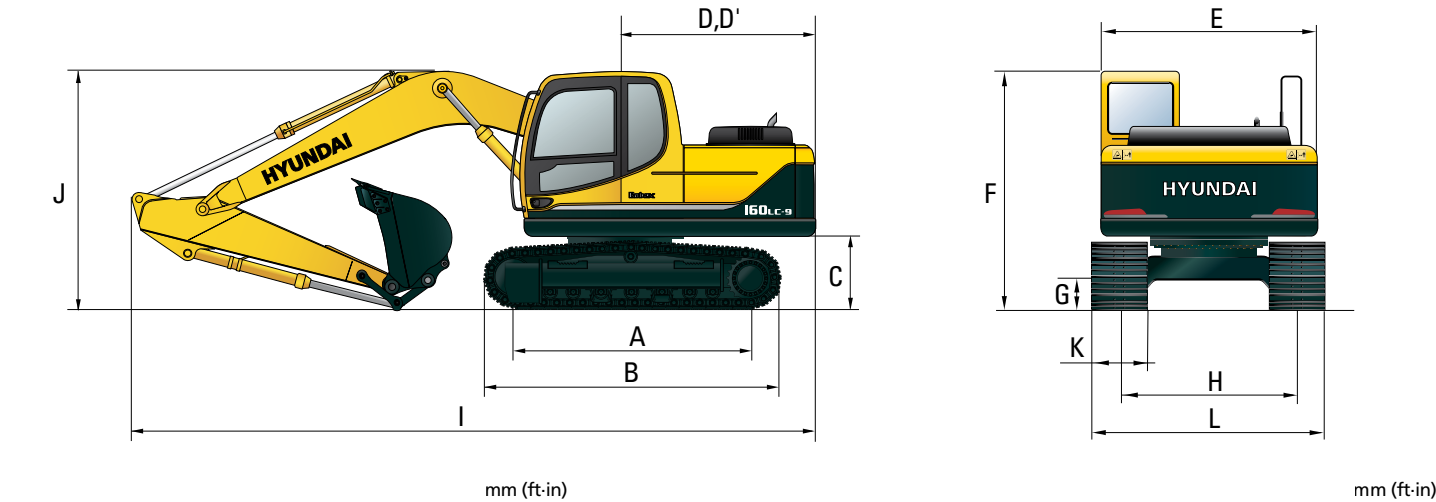
DIGGING FORCE

Boom	Length	mm (ft-in)	5,100 (16' 9")			Remarks
	Weight	kg (lb)	1,250 (2,760)			
Arm	Length	mm (ft-in)	2,200 (7' 3")	2,600 (8' 6")	3,100 (10' 2")	
	Weight	kg (lb)	750 (1,560)	810 (1,790)	890 (1,960)	
Bucket digging force	SAE	kN	107.9 [117.2]	107.9 [117.2]	107.9 [117.2]	[]: Power Boost
		kgf	11,000 [11,940]	11,000 [11,940]	11,000 [11,940]	
		lbf	24,250 [26,330]	24,250 [26,330]	24,250 [26,330]	
	ISO	kN	123.6 [134.2]	123.6 [134.2]	123.6 [134.2]	
		kgf	12,600 [13,680]	12,600 [13,680]	12,600 [13,680]	
		lbf	27,780 [30,160]	27,780 [30,160]	27,780 [30,160]	
Arm crowd force	SAE	kN	87.2 [94.7]	77.3 [83.9]	69.0 [74.9]	
		kgf	8,890 [9,650]	7,880 [8,560]	7,030 [7,630]	
		lbf	19,600 [21,280]	17,370 [18,860]	15,500 [16,830]	
	ISO	kN	91.0 [98.8]	80.3 [87.2]	71.4 [77.5]	
		kgf	9,280 [10,080]	8,190 [8,890]	7,280 [7,900]	
		lbf	20,460 [22,210]	18,060 [19,600]	16,050 [17,430]	

Note: Boom weight includes arm cylinder, piping, and pin
Arm weight includes bucket cylinder, linkage, and pin

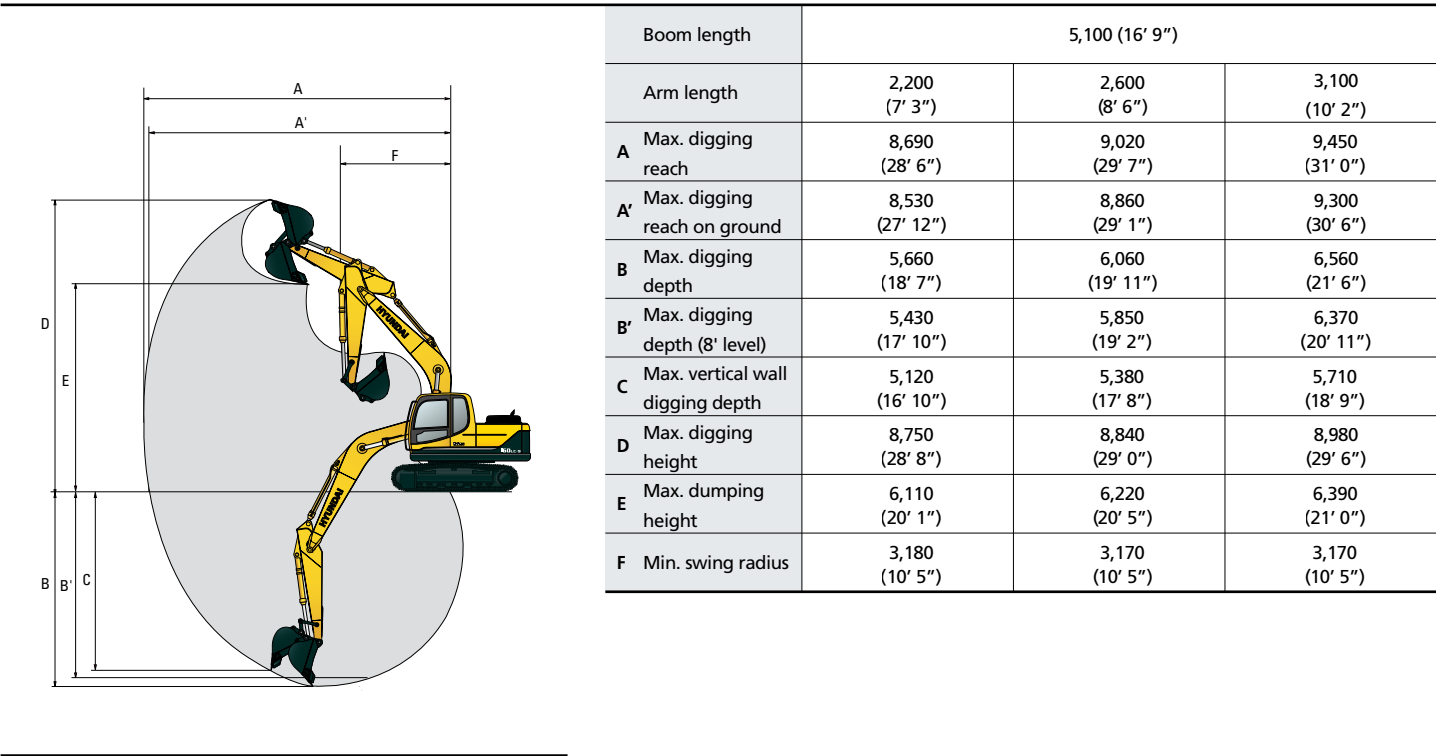
Dimensions & Working Range

R160LC-9 DIMENSIONS



mm (ft-in)		mm (ft-in)			
A	Tumbler distance	3,170 (10' 5")		Boom length	
B	Overall length of crawler	3,960 (13' 0")		5,100(16' 9")	
C	Ground clearance of counterweight	1,055 (3' 6")		Arm length	
D	Tail swing radius	2,530 (8' 4")		2,200 (7' 3")	2,600 (8' 6")
D'	Rear-end length	2,480 (8' 2")		3,100 (10' 2")	
E	Overall width of upperstructure	2,475 (8' 1")		I	Overall length
F	Overall height of cab	2,980 (9' 9")		8,660 (28' 5")	8,650 (28' 5")
G	Min. ground clearance	460 (1' 6")		8,650 (28' 5")	
H	Track gauge	1,990 (6' 6")		J	Overall height of boom
				3,010 (9' 11")	2,990 (9' 10")
				3,150 (10' 4")	
				K	Track shoe width
				500 (20")	600 (24")
				700 (28")	
				L	Overall width
				2,490 (8' 2")	2,590 (8' 6")
				2,690 (8' 10")	

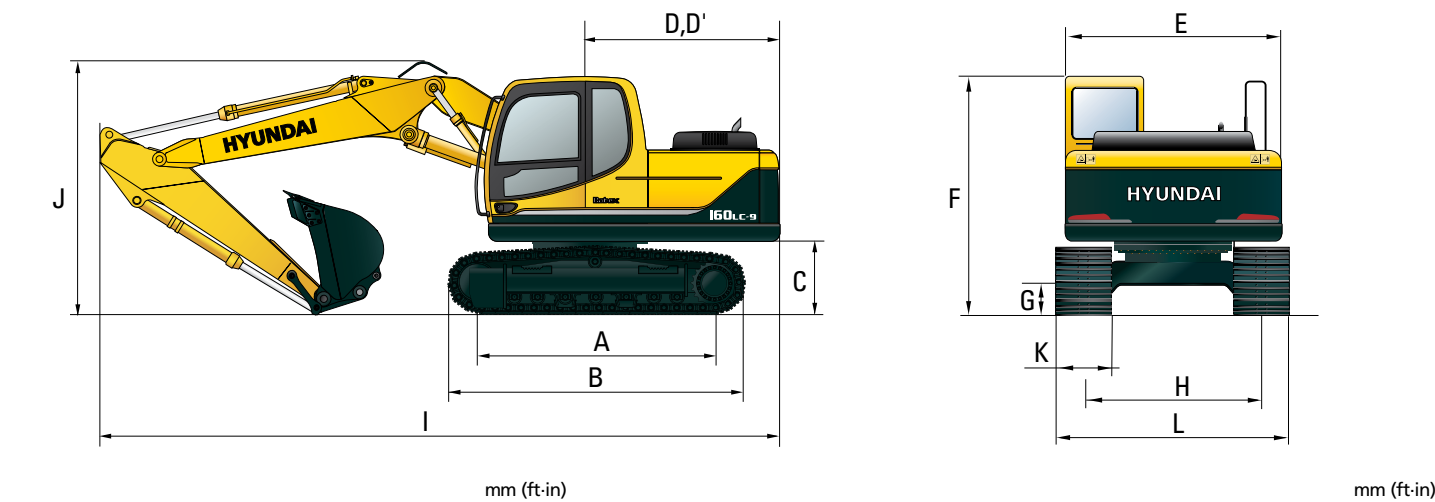
R160LC-9 WORKING RANGE



mm (ft-in)		mm (ft-in)			
Boom length		5,100 (16' 9")			
Arm length		2,200 (7' 3")	2,600 (8' 6")	3,100 (10' 2")	
A	Max. digging reach	8,690 (28' 6")	9,020 (29' 7")	9,450 (31' 0")	
A'	Max. digging reach on ground	8,530 (27' 12")	8,860 (29' 1")	9,300 (30' 6")	
B	Max. digging depth	5,660 (18' 7")	6,060 (19' 11")	6,560 (21' 6")	
B'	Max. digging depth (8' level)	5,430 (17' 10")	5,850 (19' 2")	6,370 (20' 11")	
C	Max. vertical wall digging depth	5,120 (16' 10")	5,380 (17' 8")	5,710 (18' 9")	
D	Max. digging height	8,750 (28' 8")	8,840 (29' 0")	8,980 (29' 6")	
E	Max. dumping height	6,110 (20' 1")	6,220 (20' 5")	6,390 (21' 0")	
F	Min. swing radius	3,180 (10' 5")	3,170 (10' 5")	3,170 (10' 5")	

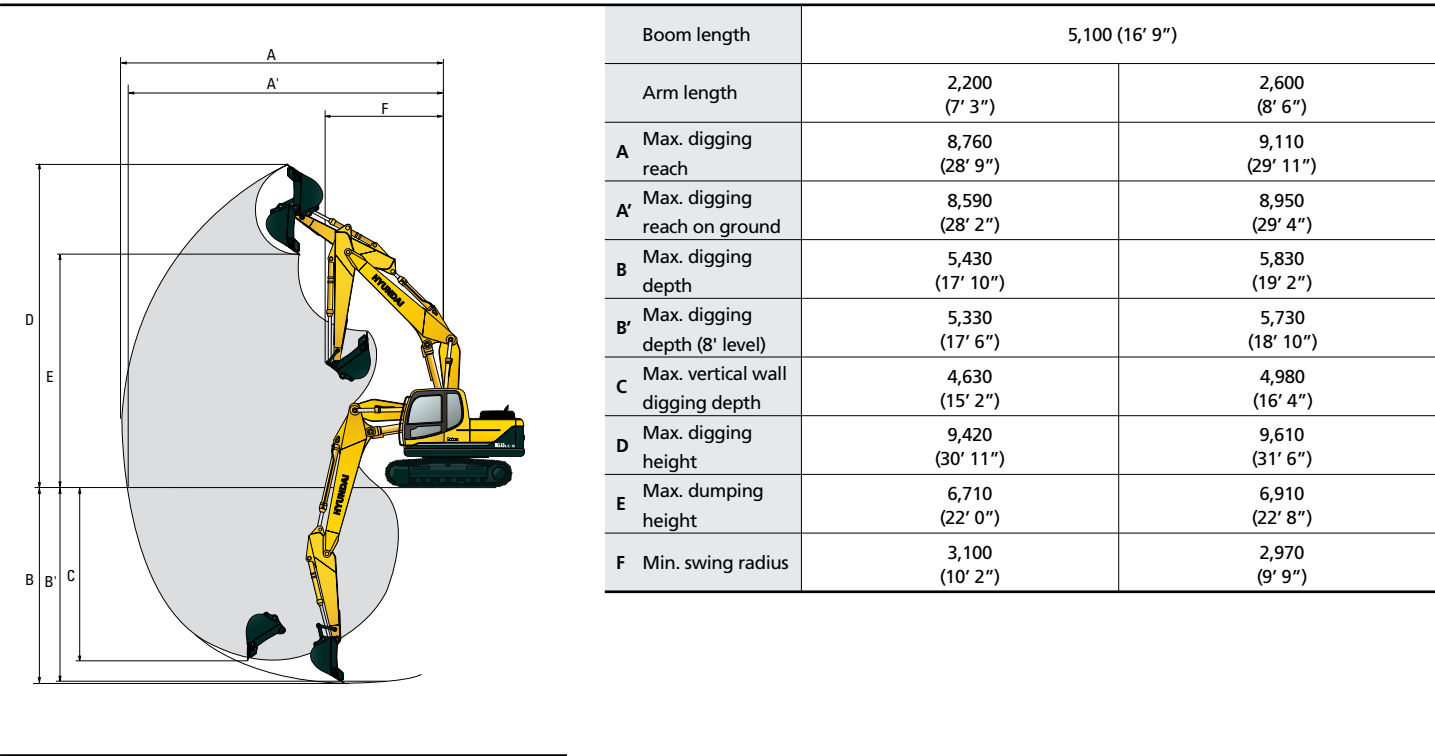
Dimensions & Working Range

R160LC-9 2-PIECE BOOM DIMENSIONS



mm (ft-in)		mm (ft-in)			
A	Tumbler distance	3,170 (10' 5")		Boom length	
B	Overall length of crawler	3,960 (13' 0")		5,100(16' 9")	
C	Ground clearance of counterweight	1,055 (3' 6")		Arm length	
D	Tail swing radius	2,530 (8' 4")		2,200 (7' 3")	2,600 (8' 6")
D'	Rear-end length	2,480 (8' 2")		I	Overall length
E	Overall width of upperstructure	2,475 (8' 1")		8,610 (28' 3")	8,610 (28' 3")
F	Overall height of cab	2,980 (9' 9")		J	Overall height of boom
G	Min. ground clearance	460 (1' 6")		3,040 (9' 12")	3,060 (10' 0")
H	Track gauge	1,990 (6' 6")			
				K	Track shoe width
				500 (20")	600 (24")
				700 (28")	
				L	Overall width
				2,490 (8' 2")	2,590 (8' 6")
				2,690 (8' 10")	

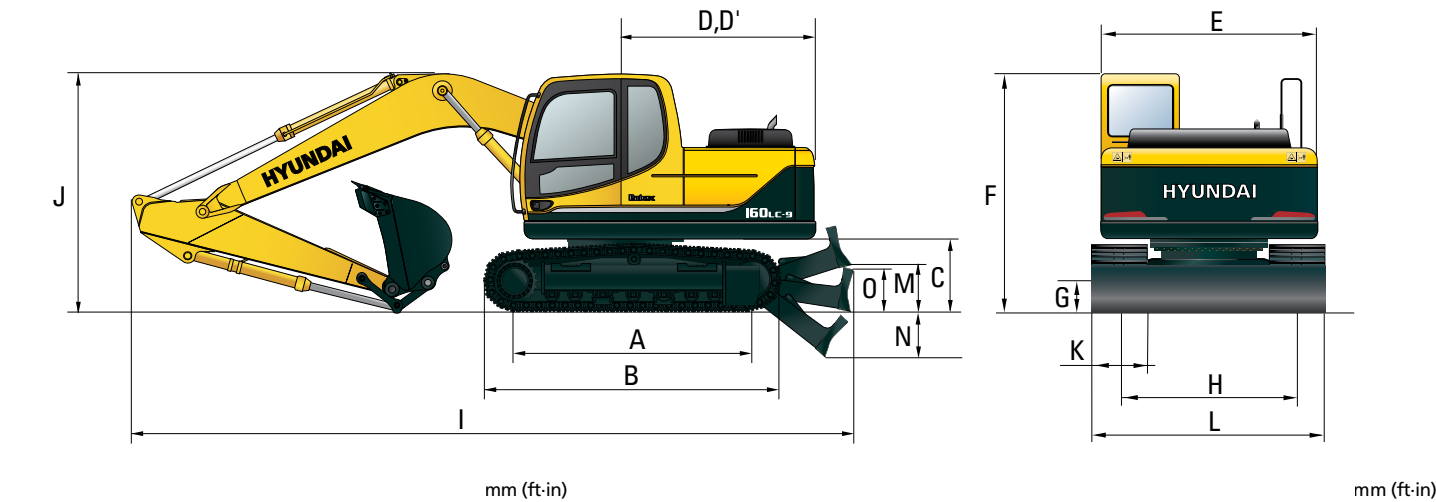
R160LC-9 2-PIECE BOOM WORKING RANGE



mm (ft-in)		mm (ft-in)			
Boom length		5,100 (16' 9")			
Arm length		2,200 (7' 3")	2,600 (8' 6")		
A	Max. digging reach	8,760 (28' 9")	9,110 (29' 11")		
A'	Max. digging reach on ground	8,590 (28' 2")	8,950 (29' 4")		
B	Max. digging depth	5,430 (17' 10")	5,830 (19' 2")		
B'	Max. digging depth (8' level)	5,330 (17' 6")	5,730 (18' 10")		
C	Max. vertical wall digging depth	4,630 (15' 2")	4,980 (16' 4")		
D	Max. digging height	9,420 (30' 11")	9,610 (31' 6")		
E	Max. dumping height	6,710 (22' 0")	6,910 (22' 8")		
F	Min. swing radius	3,100 (10' 2")	2,970 (9' 9")		

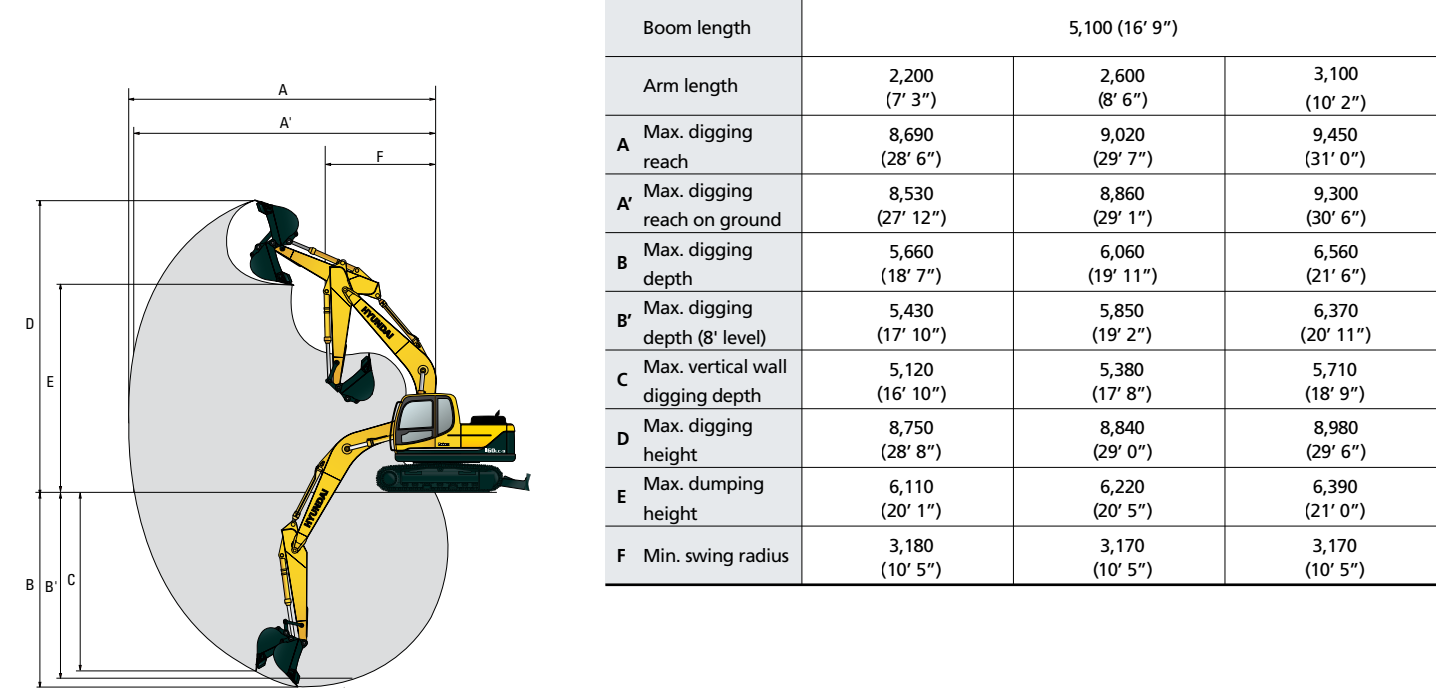
Dimensions & Working Range

R160LCD-9 DIMENSIONS



mm (ft-in)		mm (ft-in)			
A	Tumbler distance	3,170 (10' 5")		Boom length	
B	Overall length of crawler	3,960 (13' 0")		5,100(16' 9")	
C	Ground clearance of counterweight	1,055 (3' 6")		Arm length	
D	Tail swing radius	2,530 (8' 4")		2,200 (7' 3")	
D'	Rear-end length	2,480 (8' 2")		2,600 (8' 6")	
E	Overall width of upperstructure	2,475 (8' 1")		3,100 (10' 2")	
F	Overall height of cab	2,980 (9' 9")		I Overall length	
G	Min. ground clearance	460 (1' 6")		9,110 (29' 11")	
H	Track gauge	1,990 (6' 6")		9,100 (29' 10")	
M	Ground clearance of blade up	615 (2' 0")		9,100 (29' 10")	
N	Depth of blade down	675 (2' 3")		J Overall height of boom	
O	Height of blade	640 (2' 1")		3,010 (9' 11")	
				2,990 (9' 10")	
				3,150 (10' 4")	
				K Track shoe width	
				500 (20")	
				600 (24")	
				700 (28")	
				L Overall width	
				2,490 (8' 2")	
				2,590 (8' 6")	
				2,690 (8' 10")	

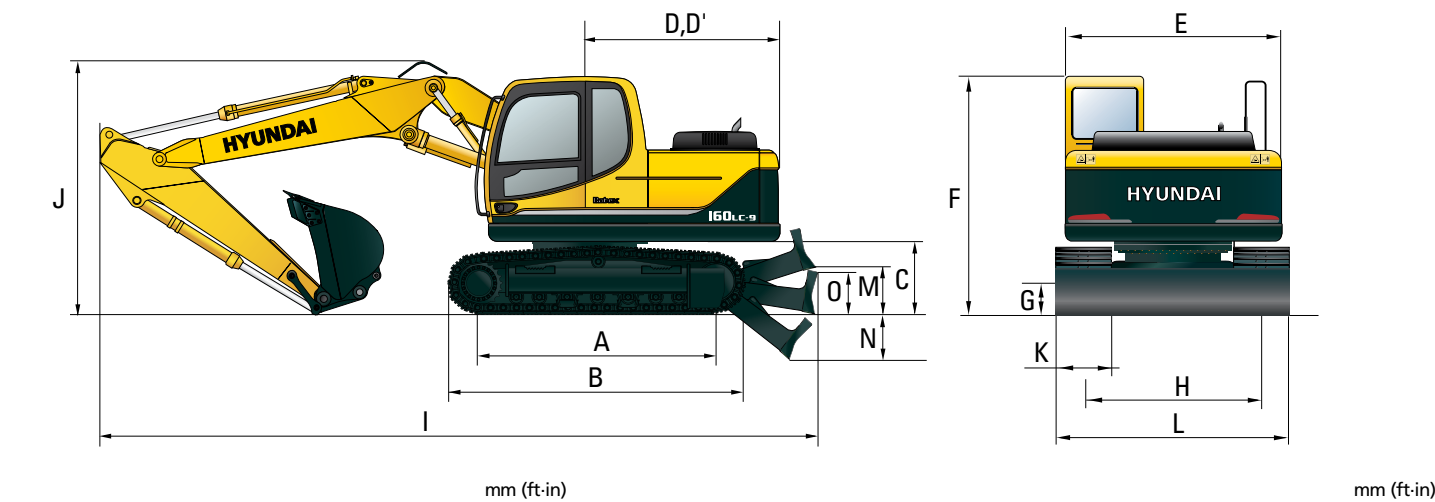
R160LCD-9 WORKING RANGE



mm (ft-in)		mm (ft-in)			
		Boom length		5,100 (16' 9")	
		Arm length		2,200 (7' 3")	
				2,600 (8' 6")	
				3,100 (10' 2")	
A	Max. digging reach	8,690 (28' 6")		9,020 (29' 7")	
A'	Max. digging reach on ground	8,530 (27' 12")		8,860 (29' 1")	
B	Max. digging depth	5,660 (18' 7")		6,060 (19' 11")	
B'	Max. digging depth (8' level)	5,430 (17' 10")		5,850 (19' 2")	
C	Max. vertical wall digging depth	5,120 (16' 10")		5,380 (17' 8")	
D	Max. digging height	8,750 (28' 8")		8,840 (29' 0")	
E	Max. dumping height	6,110 (20' 1")		6,220 (20' 5")	
F	Min. swing radius	3,180 (10' 5")		3,170 (10' 5")	

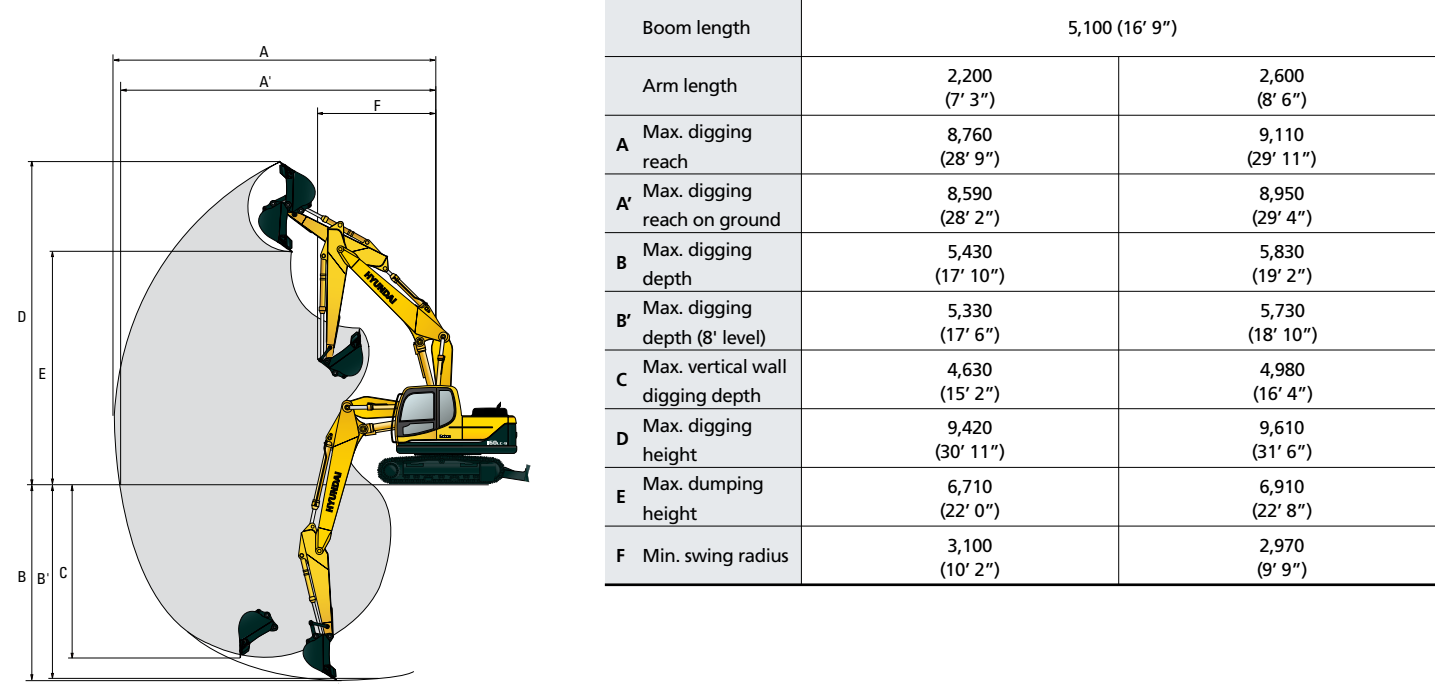
Dimensions & Working Range

R160LCD-9 2-PIECE BOOM DIMENSIONS



mm (ft-in)		mm (ft-in)			
A	Tumbler distance	3,170 (10' 5")		Boom length	
B	Overall length of crawler	3,960 (13' 0")		5,100(16' 9")	
C	Ground clearance of counterweight	1,055 (3' 6")		Arm length	
D	Tail swing radius	2,530 (8' 4")		2,200 (7' 3")	
D'	Rear-end length	2,480 (8' 2")		2,600 (8' 6")	
E	Overall width of upperstructure	2,475 (8' 1")		I Overall length	
F	Overall height of cab	2,980 (9' 9")		9,080 (29' 9")	
G	Min. ground clearance	460 (1' 6")		9,080 (29' 9")	
H	Track gauge	1,990 (6' 6")		J Overall height of boom	
M	Ground clearance of blade up	615 (2' 0")		3,040 (9' 12")	
N	Depth of blade down	675 (2' 3")		3,060 (10' 0")	
O	Height of blade	640 (2' 1")			
				K Track shoe width	
				500 (20")	
				600 (24")	
				700 (28")	
				L Overall width	
				2,490 (8' 2")	
				2,590 (8' 6")	
				2,690 (8' 10")	

R160LCD-9 2-PIECE BOOM WORKING RANGE























mm (ft-in)		mm (ft-in)			
		Boom length		5,100 (16' 9")	
		Arm length		2,200 (7' 3")	
				2,600 (8' 6")	
A	Max. digging reach	8,760 (28' 9")		9,110 (29' 11")	
A'	Max. digging reach on ground	8,590 (28' 2")		8,950 (29' 4")	
B	Max. digging depth	5,430 (17' 10")		5,830 (19' 2")	
B'	Max. digging depth (8' level)	5,330 (17' 6")		5,730 (18' 10")	
C	Max. vertical wall digging depth	4,630 (15' 2")		4,980 (16' 4")	
D	Max. digging height	9,420 (30' 11")		9,610 (31' 6")	
E	Max. dumping height	6,710 (22' 0")		6,910 (22' 8")	
F	Min. swing radius	3,100 (10' 2")		2,970 (9' 9")	











Lifting Capacity

R160LC-9

 Rating over-front  Rating over-side or 360 degree

Boom : 5.10 m (16' 9") / Arm : 2.20 m (7' 3") / Bucket : 0.70 m ³ (0.92 yd ³) SAE heaped / Shoe : 600mm(24") triple grouser													
Load point height m (ft)		Load radius								At max. reach			
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		Capacity		Reach	
												m (ft)	
7.5 m (25.0 ft)	kg									*3770	3660	5.60	
	lb									*8310	8070	(18.4)	
6.0 m (20.0 ft)	kg									*3690	2460	6.98	
	lb									*8140	5420	(22.9)	
4.5 m (15.0 ft)	kg					*4590	*4590	*4130	3120	3240	1980	7.76	
	lb					*10120	*10120	*9110	6880	7140	4370	(25.5)	
3.0m (10.0 ft)	kg			*9120	8860	*5810	4720	*4620	2990	2930	1770	8.15	
	lb			*20110	19530	*12810	10410	*10190	6590	6460	3900	(26.7)	
1.5 m (5.0 ft)	kg					*7050	4360	4680	2830	2850	1700	8.20	
	lb					*15540	9610	10320	6240	6280	3750	(26.9)	
Ground	kg			*7100	*7100	7170	4150	4550	2710	2980	1770	7.94	
	lb			*15650	*15650	15810	9150	10030	5970	6570	3900	(26.0)	
-1.5 m (-5.0 ft)	kg	*7010	*7010	*11130	7780	7100	4090	4500	2670	3390	2030	7.31	
	lb	*15450	*15450	*24540	17150	15650	9020	9920	7470	7470	4480	(24.0)	
-3.0 m (-10.0 ft)	kg	*11210	*11210	*9650	7930	*6690	4150			*3780	2700	6.19	
	lb	*24710	*24710	*21270	17480	*14750	9150			*8330	5950	(20.3)	
-4.5 m (-15.0 ft)	kg			*6300	*6300								
	lb			*13890	*13890								

Boom : 5.10 m (16' 9") / Arm : 2.60 m (8' 6") / Bucket : 0.70 m ³ (0.92 yd ³) SAE heaped / Shoe : 600mm(24") triple grouser													
Load point height m (ft)		Load radius								At max. reach			
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity	
												m (ft)	
7.5 m (25.0 ft)	kg											*3410	3190
	lb											*7520	7030
6.0 m (20.0 ft)	kg							*3040	*3040			*3380	2240
	lb							*6700	*6700			*7450	4940
4.5 m (15.0 ft)	kg							*3790	3150			3000	1820
	lb							*8360	6940			6610	4010
3.0m (10.0 ft)	kg			*7930	*7930	*5330	4770	*4320	2990	*2830	2020	2730	1630
	lb			*17480	*17480	*11750	10520	*9520	6590	*6240	4450	6020	3590
1.5 m (5.0 ft)	kg			*8090	8060	*6680	4380	4670	2820	3250	1940	2650	1560
	lb			*17840	17770	*14730	9660	10300	6220	7170	4280	5840	3440
Ground	kg			*7880	7700	*7150	4130	4520	2680	3190	1880	2750	1620
	lb			*17370	16980	*15760	9110	9960	5910	7030	4140	6060	3570
-1.5 m (-5.0 ft)	kg	*6690	*6690	*10670	7660	7030	4020	4440	2610	3090	1830	7.69	
	lb	*14750	*14750	*23520	16890	15500	8860	9790	5750	6810	4030	(25.2)	
-3.0 m (-10.0 ft)	kg	*9970	*9970	*10310	7780	*6990	4050	4470	2640	*3770	2350	6.64	
	lb	*21980	*21980	*22730	17150	*15410	8930	9850	5820	*8310	5180	(21.8)	
-4.5 m (-15.0 ft)	kg			*7500	*7500	*4980	4230						
	lb			*16530	*16530	*10980	9330						













Boom : 5.10 m (16' 9") / Arm : 3.10 m (11' 1") / Bucket : 0.70 m ³ (0.92 yd ³) SAE heaped / Shoe : 600mm(24") triple grouser													
Load point height m (ft)		Load radius								At max. reach			
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity	
												m (ft)	
7.5 m (25.0 ft)	kg											*3030	2700
	lb											*6680	5950
6.0 m (20.0 ft)	kg							*2890	*2890			*3050	1980
	lb							*6370	*6370			*6720	4370
4.5 m (15.0 ft)	kg							*3370	3180	*2150	2080	2720	1630
	lb							*7430	7010	*4740	4590	6000	3590
3.0m (10.0 ft)	kg					*4730	*4730	*3950	3010	*3110	2020	2490	1460
	lb					*10430	*10430	*8710	6640	*6860	4450	5490	3220
1.5 m (5.0 ft)	kg			*10240	8300	*6180	4430	*4640	2820	3240	1920	2420	1400
	lb			*22580	18300	*13620	9770	*10230	6220	7140	4230	5340	3090
Ground	kg			*8650	7710	7150	4120	4500	2660	3150	1840	2490	1440
	lb			*19070	17000	15760	9080	9920	5860	6940	4060	5490	3170
-1.5 m (-5.0 ft)	kg	*6290	*6290	*10300	7570	6980	3970	4390	2560	3110	1800	2760	1600
	lb	*13870	*13870	*22710	16690	15390	8750	9680	5640	6860	3970	6080	3530
-3.0 m (-10.0 ft)	kg	*8930	*8930	*10930	7630	6960	3960	4380	2550			3390	2000
	lb	*19690	*19690	*24100	16820	15340	8730	9660	5620			7470	4410
-4.5 m (-15.0 ft)	kg	*12410	*12410	*8670	7850	*5820	4070					*3390	3110
	lb	*27360	*27360	*19110	17310	*12830	8970					*7470	6860













- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (*) indicates the load limited by hydraulic capacity.

Lifting Capacity

R160LC-9 2-PIECE BOOM


 Rating over-front  Rating over-side or 360 degree


Boom : 5.10 m (16' 9") / Arm : 2.20 m (7' 3") / Bucket : 0.70 m ³ (0.92 yd ³) SAE heaped / Shoe : 600mm(24") triple grouser															
Load point height m (ft)		Load radius								At max. reach					
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach	
														m (ft)	
6.0 m (20.0 ft)	kg													*3750	2390
	lb													*8270	5270
4.5 m (15.0 ft)	kg													3190	1920
	lb													7030	4230
3.0m (10.0 ft)	kg							*5860	4710			*9190	6880	2890	1710
	lb							*12920	10380			*20210	6550	6370	3770
1.5 m (5.0 ft)	kg							*7010	4330			4700	2800	2820	1650
	lb							*15450	9550			10360	6170	6220	3640
Ground	kg					*6200	*6200	7180	4100			4560	2680	2950	1730
	lb					*13670	*13670	15830	9040			10050	5910	6500	3810
-1.5 m (-5.0 ft)	kg	*6200	*6200	*10330	7710	7110	4040	4510	2640					3360	1990
	lb	*13670	*13670	*22770	17000	15670	8910	9940	5820					7410	4390
-3.0 m (-10.0 ft)	kg					*9150	7900	*6410	4120					*3300	2650
	lb					*20170	17420	*14130	9080					*7280	5840

Boom : 5.10 m (16' 9") / Arm : 2.60 m (8' 6") / Bucket : 0.70 m ³ (0.92 yd ³) SAE heaped / Shoe : 600mm(24") triple grouser															
Load point height m (ft)		Load radius										At max. reach			
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach	
															m (ft)
6.0 m (20.0 ft)	kg												*3450	2160	7.48
	lb												*7610	4760	(24.5)
4.5 m (15.0 ft)	kg												2950	1760	8.20
	lb												6500	3880	(26.9)
3.0m (10.0 ft)	kg							*4350	2980	*3250	2000		2680	1570	8.57
	lb							*9590	6570	*7170	4410		5910	3460	(28.1)
1.5 m (5.0 ft)	kg			*6980	*6980	*6660	4350	4690	2790	3260	1920		2610	1510	8.62
	lb			*15390	*15390	*14680	9590	10340	6150	7190	4230		5750	3330	(28.3)
Ground Line	kg			*7040	*7040	7160	4080	4530	2650	3190	1850		2710	1570	8.37
	lb			*15520	*15520	15790	8990	9990	5840	7030	4080		5970	3460	(27.5)
-1.5 m (-5.0 ft)	kg	*6030	*6030	*9960	7580	7040	3970	4450	2580				3050	1780	7.78
	lb	*13290	*13290	*21960	16710	15520	8750	9810	5690				6720	3920	(25.5)
-3.0 m (-10.0 ft)	kg	*9490	*9490	*9860	7730	*6740	4010	4490	2610				*3350	2290	6.76
	lb	*20920	*20920	*21740	17040	*14860	8840	9900	5750				*7390	5050	(22.2)
-4.5 m (-15.0 ft)	kg			*6840	*6840	*4560	4220								
	lb			*15080	*15080	*10050	9300								











Lifting Capacity

R160LCD-9













 Rating over-front

 Rating over-side or 360 degree













Boom : 5.10 m (16' 9") / Arm : 2.20 m (7' 3") / Bucket : 0.70 m³ (0.92 yd³) SAE heaped / Shoe : 600mm(24") triple grouser

Load point height m (ft)		Load radius								At max. reach		
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		Capacity		Reach
												m (ft)
7.5 m	kg									*3770	*3770	5.60
(25.0 ft)	lb									*8310	*8310	(18.4)
6.0 m	kg									*3690	2600	6.98
(20.0 ft)	lb									*8140	5730	(22.9)
4.5 m	kg					*4590	*4590	*4130	3290	3590	2110	7.76
(15.0 ft)	lb					*10120	*10120	*9110	7250	7910	4650	(25.5)
3.0m	kg			*9120	*9120	*5810	4950	*4620	3150	3260	1880	8.15
(10.0 ft)	lb			*20110	*20110	*12810	10910	*10190	6940	7190	4140	(26.7)
1.5 m	kg					*7050	4600	5170	2990	3180	1810	8.20
(5.0 ft)	lb					*15540	10140	11400	6590	7010	3990	(26.9)
Ground	kg			*7100	*7100	*7710	4390	5040	2880	3320	1890	7.94
Line	lb			*15650	*15650	*17000	9680	11110	6350	7320	4170	(26.0)
-1.5 m	kg	*7010	*7010	*11130	8200	*7620	4320	4990	2830	3770	2160	7.31
(-5.0 ft)	lb	*15450	*15450	*24540	18080	*16800	9520	11000	6240	8310	4760	(24.0)
-3.0 m	kg	*11210	*11210	*9650	8360	*6690	4380			*3780	2860	6.19
(-10.0 ft)	lb	*24710	*24710	*21270	18430	*14750	9660			*8330	6310	(20.3)
-4.5 m	kg			*6300	*6300							
(-15.0 ft)	lb			*13890	*13890							

Boom : 5.10 m (16' 9") / Arm : 2.60 m (8' 6") / Bucket : 0.70 m³ (0.92 yd³) SAE heaped / Shoe : 600mm(24") triple grouser

Load point height m (ft)		Load radius										At max. reach		
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach
														m (ft)
7.5 m	kg											*3410	3350	6.11
(25.0 ft)	lb											*7520	7390	(20.0)
6.0 m	kg							*3040	*3040			*3380	2370	7.37
(20.0 ft)	lb							*6700	*6700			*7450	5220	(24.2)
4.5 m	kg							*3790	3310			3340	1940	8.11
(15.0 ft)	lb							*8360	7300			7360	4280	(26.6)
3.0m	kg			*7930	*7930	*5330	5000	*4320	3160	*2830	2140	3040	1730	8.48
(10.0 ft)	lb			*17480	*17480	*11750	11020	*9520	6970	*6240	4720	6700	3810	(27.8)
1.5 m	kg			*8090	*8090	*6680	4620	*4950	2980	3620	2070	2960	1670	8.53
(5.0 ft)	lb			*17840	*17840	*14730	10190	*10910	6570	7980	4560	6530	3680	(28.0)
Ground	kg			*7880	*7880	*7520	4360	5010	2840	*3490	2010	3080	1730	8.28
Line	lb			*17370	*17370	*16580	9610	11050	6260	*7690	4430	6790	3810	(27.2)
-1.5 m	kg	*6690	*6690	*10670	8080	*7650	4260	4930	2780			3450	1950	7.69
(-5.0 ft)	lb	*14750	*14750	*23520	17810	*16870	9390	10870	6130			7610	4300	(25.2)
-3.0 m	kg	*9970	*9970	*10310	8200	*6990	4280	*4900	2800			*3770	2500	6.64
(-10.0 ft)	lb	*21980	*21980	*22730	18080	*15410	9440	*10800	6170			*8310	5510	(21.8)
-4.5 m	kg			*7500	*7500	*4980	4460							
(-15.0 ft)	lb			*16530	*16530	*10980	9830							


Boom : 5.10 m (16' 9") / Arm : 3.10 m (11' 1") / Bucket : 0.70 m³ (0.92 yd³) SAE heaped / Shoe : 600mm(24") triple grouser


Load point height m (ft)		Load radius										At max. reach		
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach
														m (ft)
7.5 m	kg											*3030	2850	6.73
(25.0 ft)	lb											*6680	6280	(22.1)
6.0 m	kg							*2890	*2890			*3050	2090	7.88
(20.0 ft)	lb							*6370	*6370			*6720	4610	(25.9)
4.5 m	kg							*3370	3340	*2150	*2150	3040	1740	8.57
(15.0 ft)	lb							*7430	7360	*4740	*4740	6700	3840	(28.1)
3.0m	kg					*4730	*4730	*3950	3180	*3110	2140	2790	1560	8.91
(10.0 ft)	lb					*10430	*10430	*8710	7010	*6860	4720	6150	3440	(29.2)
1.5 m	kg			*10240	8720	*6180	4670	*4640	2980	3610	2050	2710	1500	8.96
(5.0 ft)	lb			*22580	19220	*13620	10300	*10230	6570	7960	4520	5970	3310	(29.4)
Ground	kg			*8650	8130	*7240	4360	4990	2820	3520	1970	2800	1540	8.73
Line	lb			*19070	17920	*15960	9610	11000	6220	7760	4340	6170	3400	(28.6)
-1.5 m	kg	*6290	*6290	*10300	7990	*7610	4210	4880	2730	*3250	1930	3090	1720	8.17
(-5.0 ft)	lb	*13870	*13870	*22710	17610	*16780	9280	10760	6020	*7170	4250	6810	3790	(26.8)
-3.0 m	kg	*8930	*8930	*10930	8050	*7230	4190	4870	2710			*3660	2130	7.21
(-10.0 ft)	lb	*19690	*19690	*24100	17750	*15940	9240	10740	5970			*8070	4700	(23.7)
-4.5 m	kg	*12410	*12410	*8670	8270	*5820	4310					*3390	3290	5.59
(-15.0 ft)	lb	*27360	*27360	*19110	18230	*12830	9500					*7470	7250	(18.3)

1. Lifting capacity is based on SAE J1097, ISO 10567.
2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The load point is a hook located on the back of the bucket.
4. (*) indicates the load limited by hydraulic capacity.












Lifting Capacity

R160LCD-9 2-PIECE BOOM












 Rating over-front

 Rating over-side or 360 degree

Boom : 5.10 m (16' 9") / Arm : 2.20 m (7' 3") / Bucket : 0.70 m³ (0.92 yd³) SAE heaped / Shoe : 600mm(24") triple grouser

Load point height m (ft)		Load radius										At max. reach		
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach
														m (ft)
6.0 m	kg											*3750	2520	7.06
(20.0 ft)	lb											*8270	5560	(23.2)
4.5 m	kg									*4170	3280			7.83
(15.0 ft)	lb									*9190	7230			(25.7)
3.0m	kg					*5860	4950	*4630	3130					8.21
(10.0 ft)	lb					*12920	10910	*10210	6900					(26.9)
1.5 m	kg					*7010	4560	*5140	2970	*3450	2060	3140	1760	8.27
(5.0 ft)	lb					*15450	10050	*11330	6550	*7610	4540	6920	3880	(27.1)
Ground	kg					*6200	*6200	*7590	4340			3290	1840	8.01
Line	lb					*13670	*13670	*16730	9570			7250	4060	(26.3)
-1.5 m	kg	*6200	*6200	*10330	8130	*7430	4280					*3710	2120	7.39
(-5.0 ft)	lb	*13670	*13670	*22770	17920	*16380	9440					*8180	4670	(24.2)
-3.0 m	kg					*9150	8320	*6410	4350			*3300	2800	6.28
(-10.0 ft)	lb					*20170	18340	*14130	9590			*7280	6170	(20.6)

Boom : 5.10 m (16' 9") / Arm : 2.60 m (8' 6") / Bucket : 0.70 m³ (0.92 yd³) SAE heaped / Shoe : 600mm(24") triple grouser

Load point height m (ft)		Load radius										At max. reach				
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach		
														m (ft)		
6.0 m (20.0 ft)	kg													*3450	2280	7.48
	lb													*7610	5030	(24.5)
4.5 m (15.0 ft)	kg													3280	1870	8.20
	lb													7230	4120	(26.9)
3.0 m (10.0 ft)	kg							*4350	3150	*3250	2120	2990	1680	8.57		
	lb							*9590	6940	*7170	4670	6590	3700	(28.1)		
1.5 m (5.0 ft)	kg			*6980	*6980	*6660	4590	*4920	2960	3630	2040	2920	1620	8.62		
	lb			*15390	*15390	*14680	10120	*10850	6530	8000	4500	6440	3570	(28.3)		
Ground	kg			*7040	*7040	*7420	4310	5020	2810	3560	1980	3030	1680	8.37		
Line	lb			*15520	*15520	*16360	9500	11070	6190	7850	4370	6680	3700	(27.5)		
-1.5 m (-5.0 ft)	kg	*6030	*6030	*9960	8010	*7480	4210	4940	2740			3400	1900	7.78		
	lb	*13290	*13290	*21960	17660	*16490	9280	10890	6040			7500	4190	(25.5)		
-3.0 m (-10.0 ft)	kg	*9490	*9490	*9860	8150	*6740	4250	*4700	2780			*3350	2430	6.76		
	lb	*20920	*20920	*21740	17970	*14860	9370	*10360	6130			*7390	5360	(22.2)		
-4.5 m (-15.0 ft)	kg			*6840	*6840	*4560	4460									
	lb			*15080	*15080	*10050	9830									