


SFVM series



SFVM 230-02



SFVM 250-02

How to Order




SFVM 2 3 0 - 02

① ② ③

① Port type

Nil	Rc(PT) (Standard)
G	G

② Number of Ports

2	 2 Port SFVM 220-02(1/4)
3	 3 Port SFVM 230-02(1/4)
5	 5 Port SFVM 250-02(1/4) SFVM 250-03(3/8)

③ Port size


02	1/4
03	3/8

Specifications


Type	SFVM-220-02 -230-02 -250-02	SFVM-250-03
Fluid	Air	
Port size	Rc(PT) 1/4	Rc(PT) 3/8
Effective sectional area Smm ² (Cv)	19mm ² (1.0)	45mm ² (2.4)
Operating pressure	10kgf/cm ² (1MPa)	
Ambient & fluid temperature	0℃ ~ 60℃	
Lubrication	Not required	
Weight	532g	650g

Dimensions

SFVM220-02, SFVM 230-02

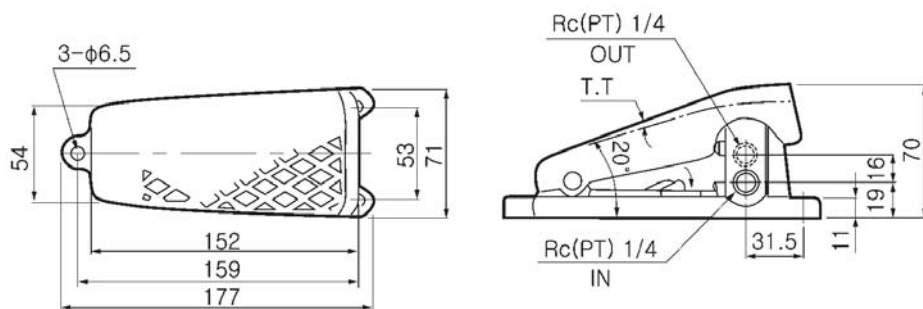

SFVM250-02

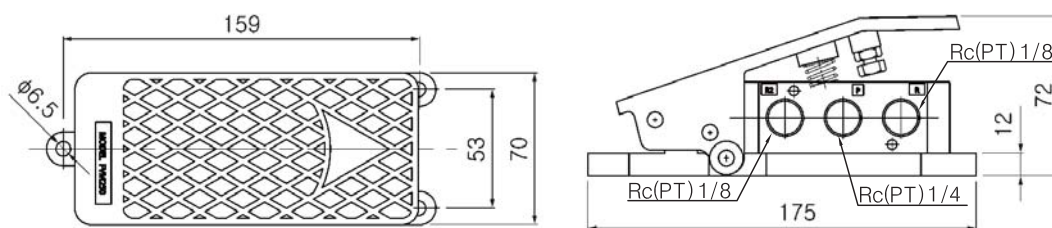

Pneumatic
Solenoid
Valve

SFVM

KQE2000

SQE

KVHS