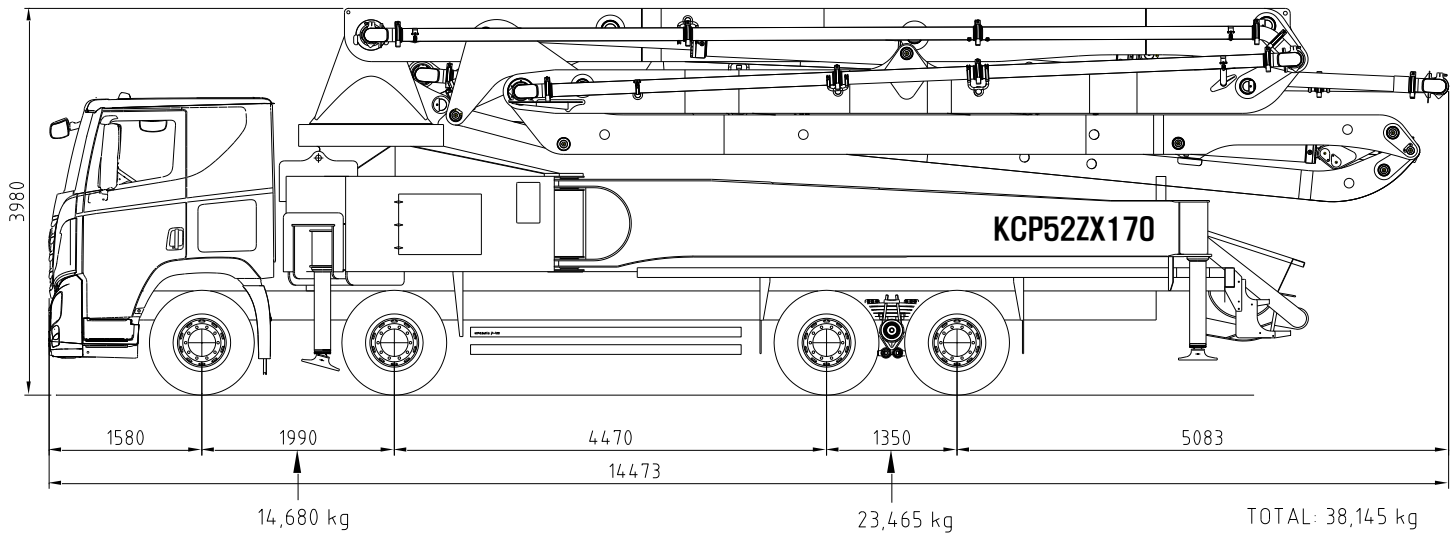


Our Pride ...

KCP52ZX170

■ Boom specifications

Vertical reach	51.6M
Horizontal reach	47.5M
Reach from front of truck	44.6M
Unfolding height	11 M
Section articulation	92°/180°/225°/180°/210°
Rotation	370°
Delivery line	125 mm
Proportional boom	Yes
End hose length	3.5M
Outrigger spread-front	9.1 M
Outrigger spread-rear	10.6 M
Max.outrigger weight	38,000kg


◎ Truck specifications : HYUNDAI XCIENT19T (500PS, EURO5)

◎ Maximum theoretical values listed.

◎ Photos and drawings are for illustrative purpose only

◎ Right to make technical amendments reserved

■ Working diagram

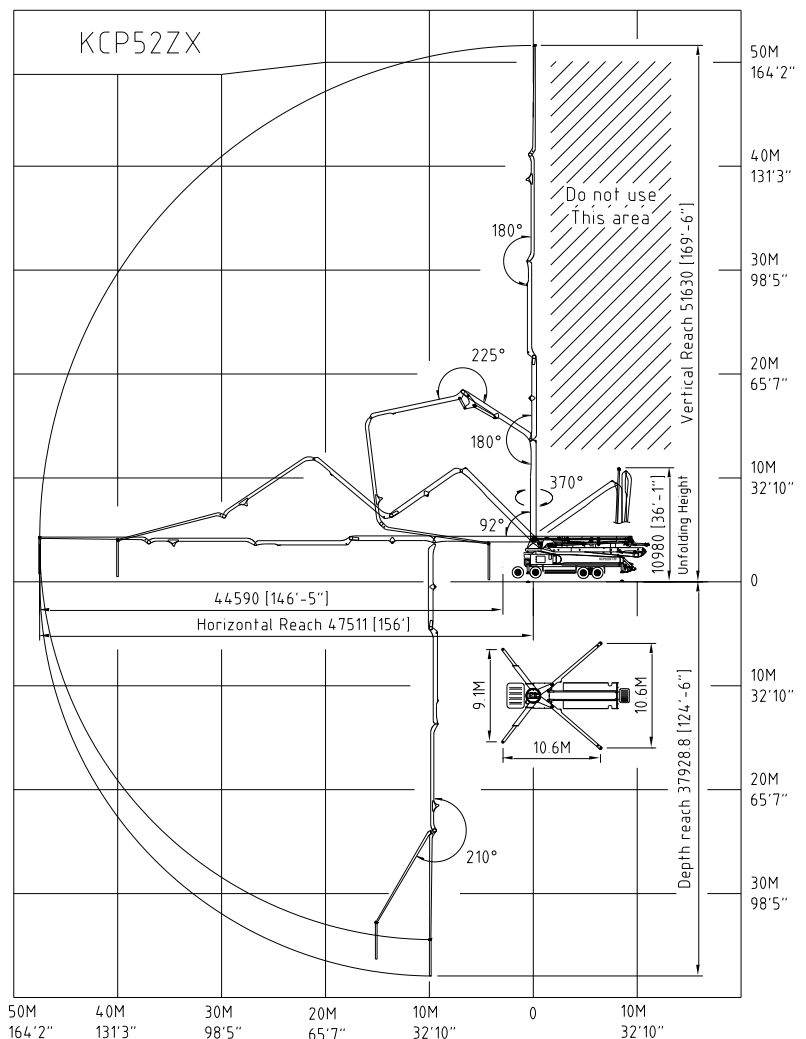

■ Pump specifications

Maximum output	170 m³/h
Concrete cylinder	Ø230×2100
Stroke per minute	32
Concrete pressure	87.5 bar
Hopper capacity	0.6 m³
S-tube	Ø200×Ø180
Hydraulic pump	KCP - K3V180DT
Cycling system	Hydraulic with manual overrides
Max. aggregate size	40 mm