


Our Pride ...

KCP60ZX170

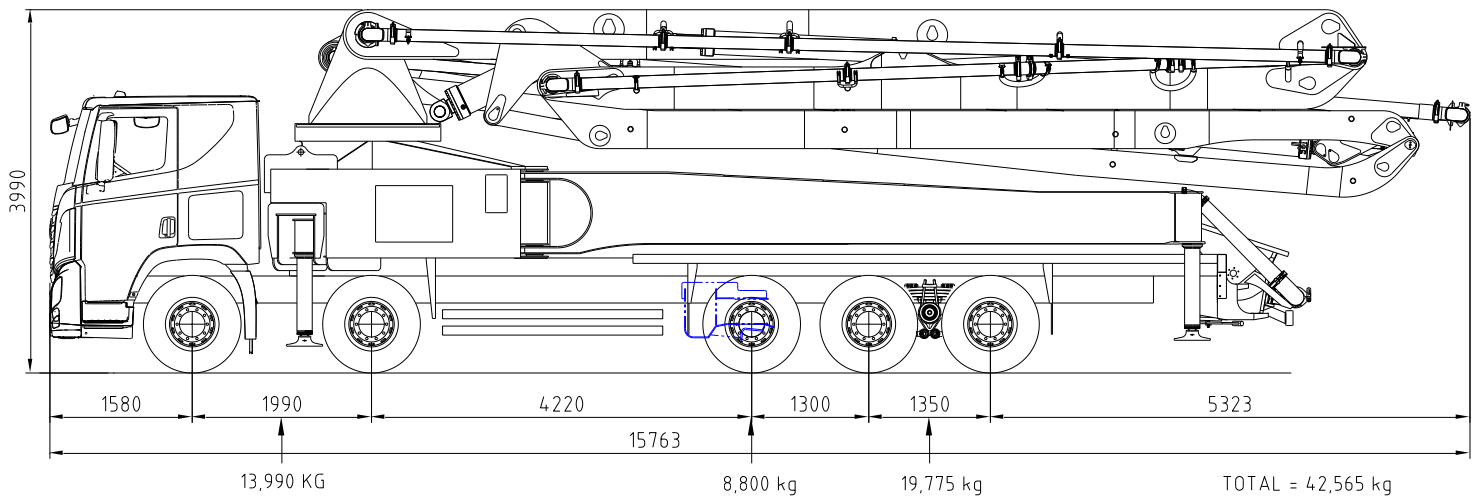


■ Boom specifications

Vertical reach	58.1M
Horizontal reach	53.9M
Reach from front of truck	50.4M
Unfolding height	13 M
Section articulation	92°/180°/210°/180°/210°
Rotation	370°
Delivery line	125 mm
Proportional boom	Yes
End hose length	3.5M
Outrigger spread-front	10.33 M
Outrigger spread-rear	12.35 M
Max.outrigger weight	42,000kg

- Truck specifications : HYUNDAI-19TON TRAGO XCIENT(500PS,EURO5)
- Maximum theoretical values listed.
- Photos and drawings are for illustrative purpose only
- Right to make technical amendments reserved

■ Working diagram

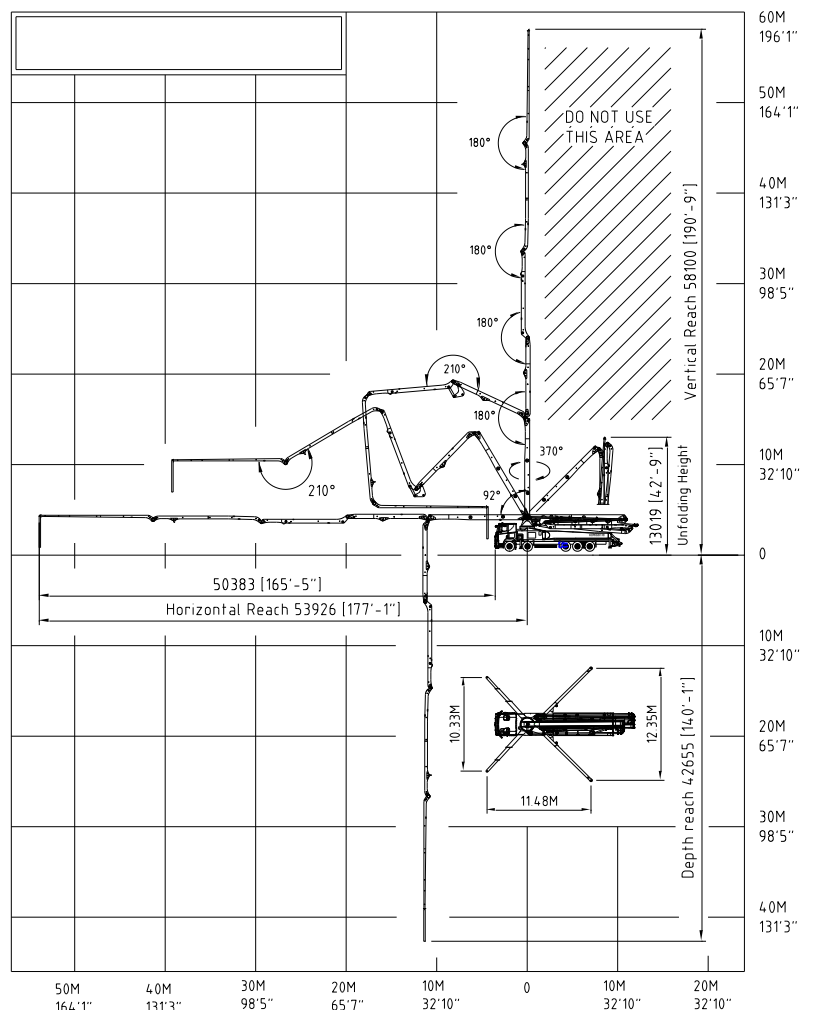

■ Pump specifications

Maximum output	170 m³/h
Concrete cylinder	Ø230×2100
Stroke per minute	32
Concrete pressure	87.5 bar
Hopper capacity	0.6 m³
S-tube	Ø200×Ø180
Hydraulic pump	KCP - K3V180DT
Cycling system	Hydraulic with manual overrides
Max. aggregate size	40 mm