


Our Pride ...

KML90H

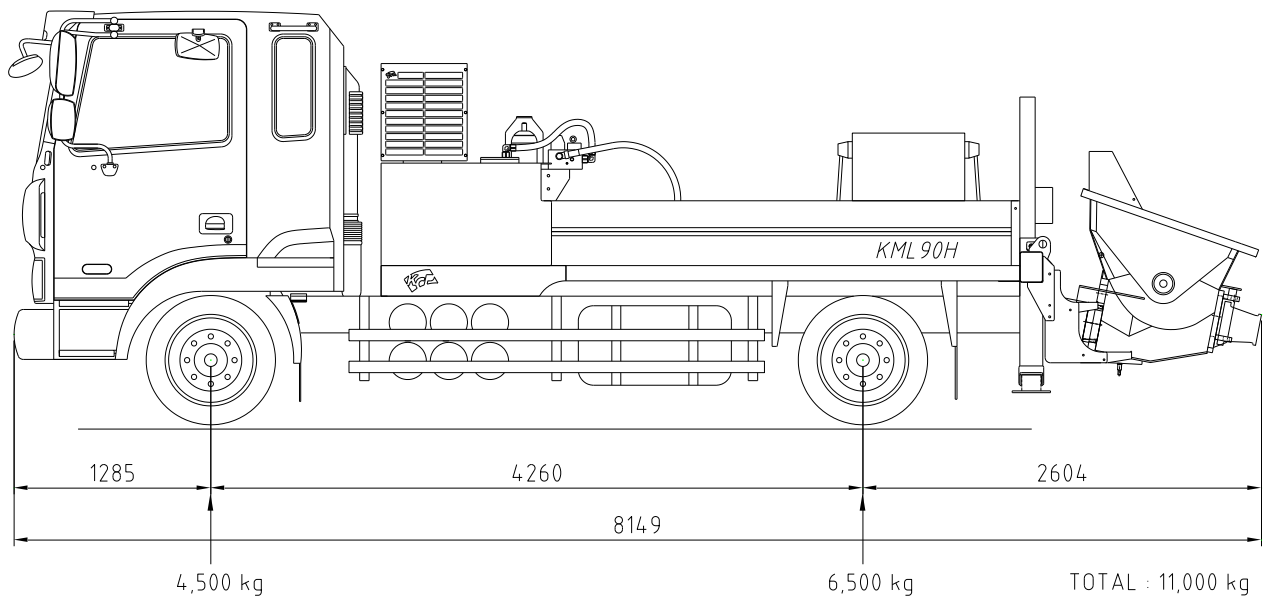

■ Pump specifications		■ Performance diagram	
Engine RPM	1550 rpm		
Maximum output	44 m³/h(Head) / 66 m³/h(Rod)		
Main cylinder	Ø130/ Ø80 × 1800 mm		
Concrete cylinder	Ø200 × 1800 mm		
Cycling system	Hydraulic with manual overrides		
Stroke per minute	13(Head) / 19(Rod)		
Concrete pressure	171 bar(Head) / 115 bar(Rod)		
Hopper capacity	0.6 m³		
S - tube	Ø200 × Ø180		
Hydraulic pump	KCP - K3V180S		
Max . aggregate size	40 mm		
Water tank volumn	450 L		
Horizontal distance	550 M		
Vertical distance	200 M		
Outrigger	Hydraulic vertical ext.		
<p>© Maximum theoretical values listed. © Photos and drawings are for illustrative purpose only © Dimension will vary with different truck makers, models and specifications © Right to make technical amendments reserved</p>			