


Our Pride ...


KML 2210H

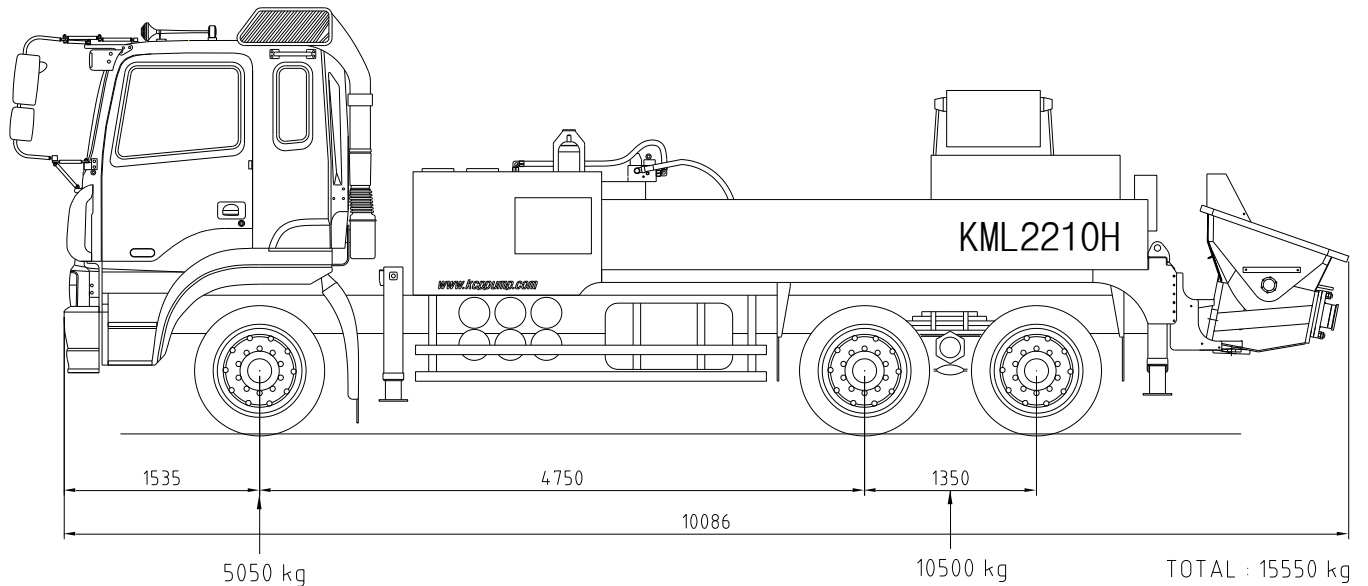

■ Technical Specifications

Engine RPM	1900
Maximum output	100 m ³ /h(HEAD), 70 m ³ /h (ROD)
Main cylinder	Ø160/ Ø 90 × 2100 ST
Concrete cylinder	Ø200 × 2100 ST
Cycling system	Hydraulic with manual overrides
Stroke per minute	17(HEAD) , 25(ROD)
Concrete pressure	224 bar (HEAD) , 150(ROD)
Hopper capacity	0.6 m ³
S-tube	Ø200 × Ø180
Hydraulic pump	KAWASAKI - K3V180DT
Water tank volumn	800 L
Max. aggregate size	40 mm
Truck	HYUNDAI 16T-E5 (400Ps, 178kg.m)

■ Performance Diagram

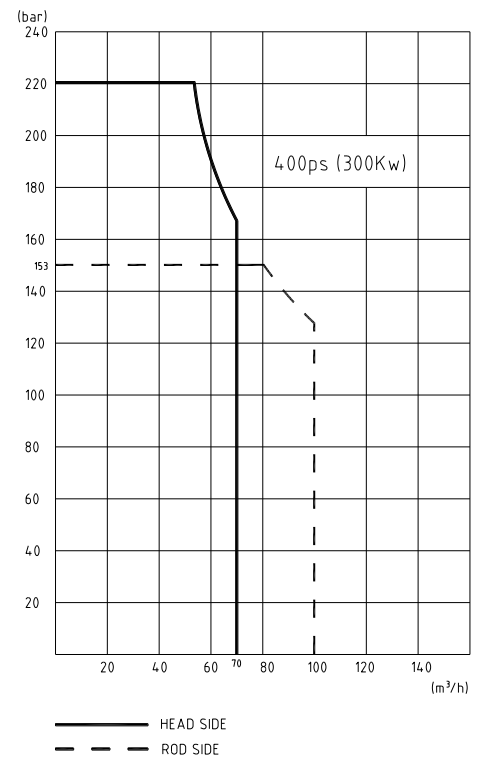

© Maximum theoretical values listed.

© Photos and drawings are for illustrative purpose only

© Dimension will vary with different truck makers, models and specifications

© Right to make technical amendments reserved