


Our Pride ...

KCP36RX170

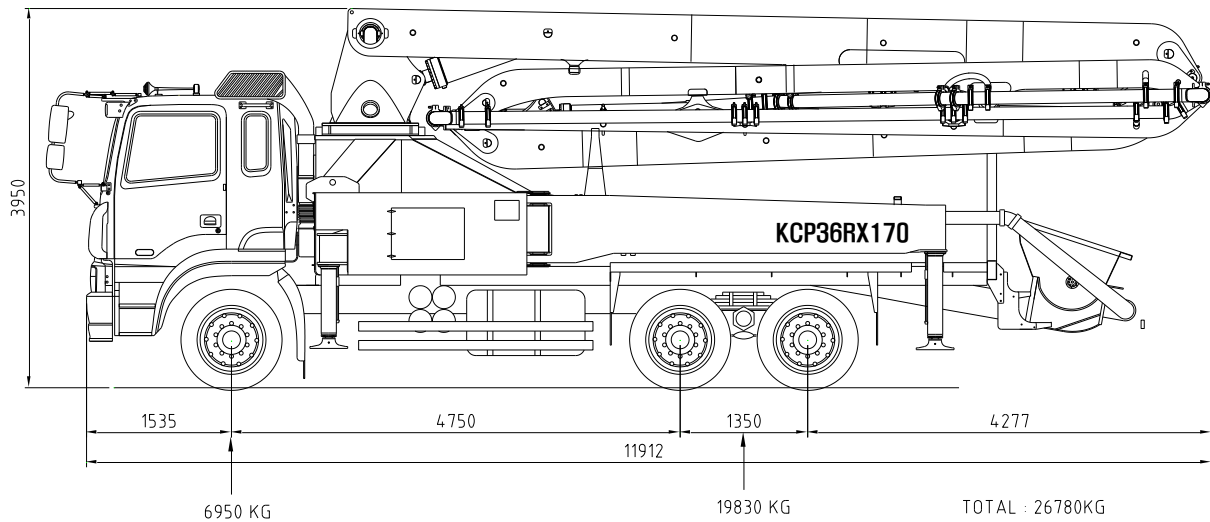


▣ Boom specifications

Vertical reach	36 M
Horizontal reach	32.2 M
Reach from front of truck	29.8 M
Unfolding height	9.1 M
Section articulation	94°/180°/240°/245°
Rotation	370°
Delivery line	125 mm
Proportional boom	Yes
End hose length	4M
Outrigger spread-front	6.18 M
Outrigger spread-rear	7.15 M
Max.outrigger weight	22,500kg

◎ Maximum theoretical values listed.

- ◎ Photos and drawings are for illustrative purpose only
- ◎ Dimension will vary with different truck makers, models and specifications
- ◎ Right to make technical amendments reserved

▣ Working diagram

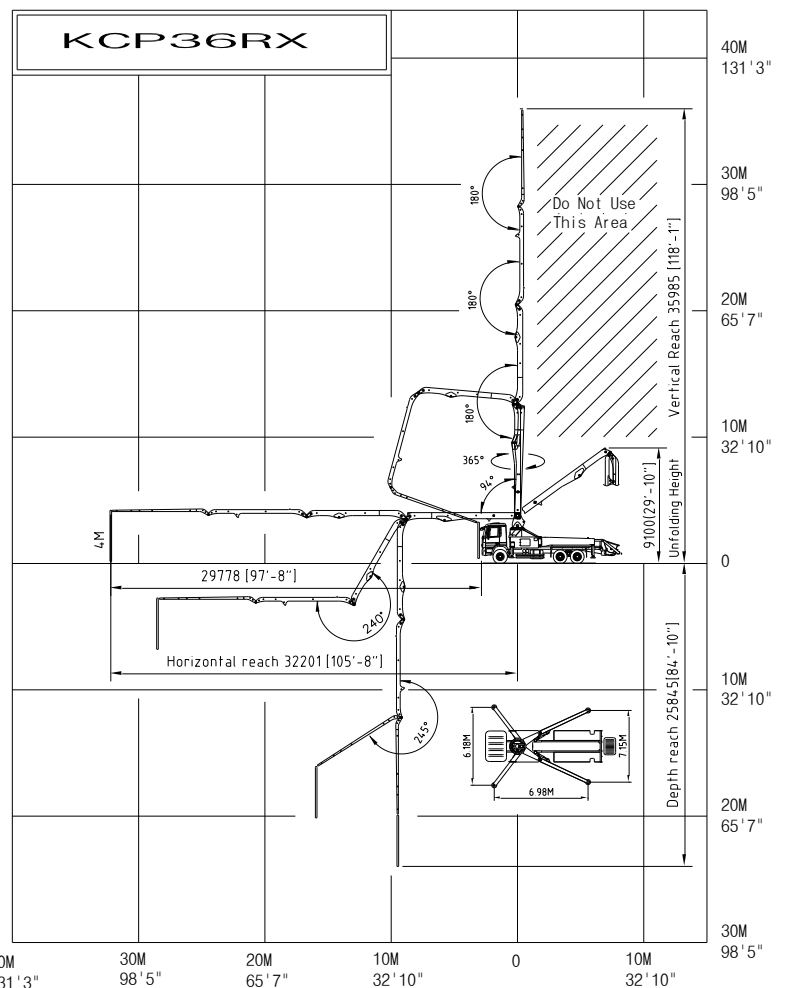

▣ Pump specifications

Maximum output	170 m³/h
Concrete cylinder	Ø230×2100
Stroke per minute	32
Concrete pressure	72 bar
Hopper capacity	0.6 m³
S-tube	Ø200×Ø180
Hydraulic pump	KCP - K3V140DT
Cycling system	Hydraulic with manual overrides
Max. aggregate size	40 mm