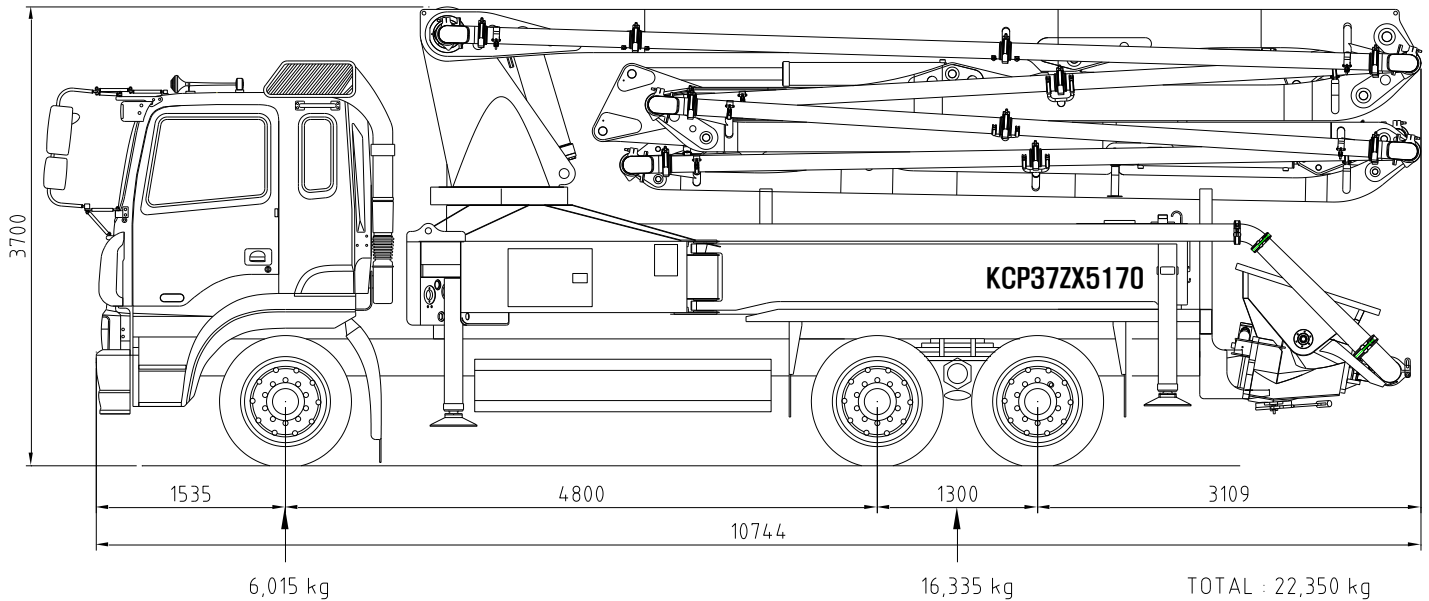


Our Pride ...

KCP37ZX5170**Boom specifications**


Vertical reach	36.34M
Horizontal reach	32.07 M
Reach from front of truck	28.94 M
Unfolding height	7.3 M
Section articulation	92°/180°/225°/180°/245°
Rotation	370°
Delivery line	125 mm
Proportional boom	Yes
End hose length	3M
Outrigger spread-front	5.63 M
Outrigger spread-rear	6.67 M
Max. outrigger weight	17,500kg

⊙ Truck specifications : HYUNDAI – HD260 (EURO2)

⊙ Maximum theoretical values listed.

⊙ Photos and drawings are for illustrative purpose only

⊙ Right to make technical amendments reserved

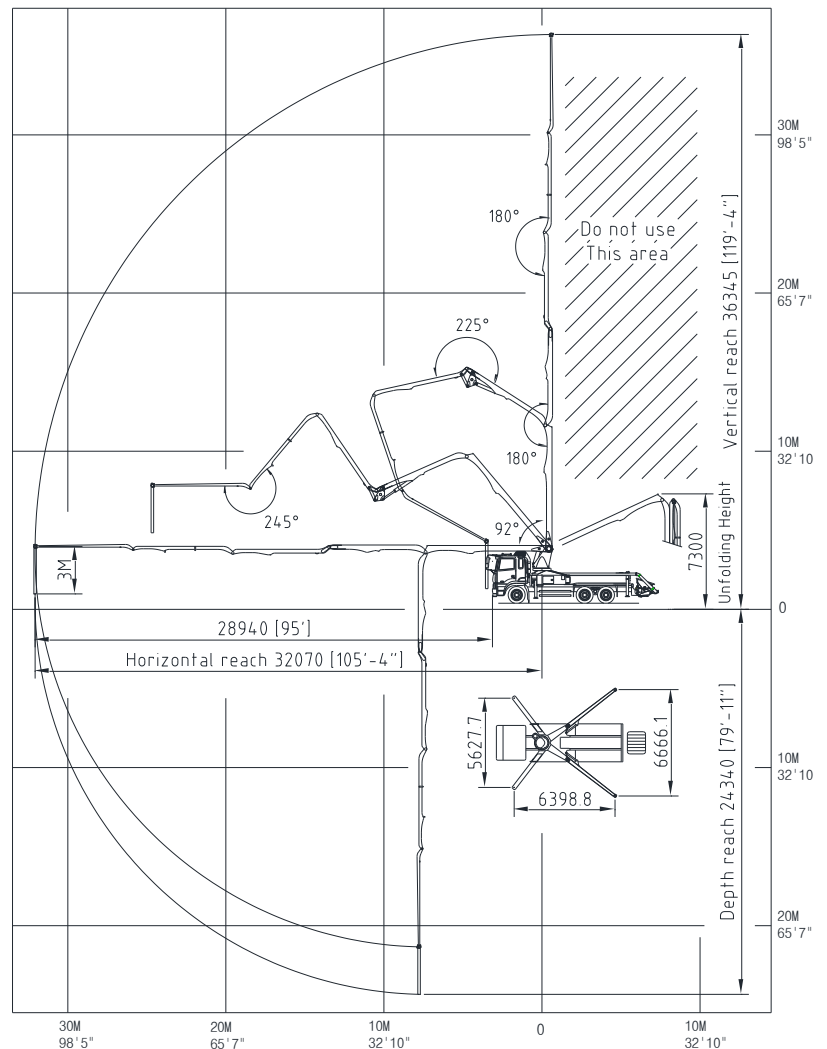Working diagram**Pump specifications**

Maximum output	100 m³/h
Concrete cylinder	Ø230×1800
Stroke per minute	25
Concrete pressure	69 bar
Hopper capacity	0.6 m³
S-tube	Ø200×Ø180
Hydraulic pump	KCP – K3V180S
Cycling system	Hydraulic with manual overrides
Max. aggregate size	40 mm