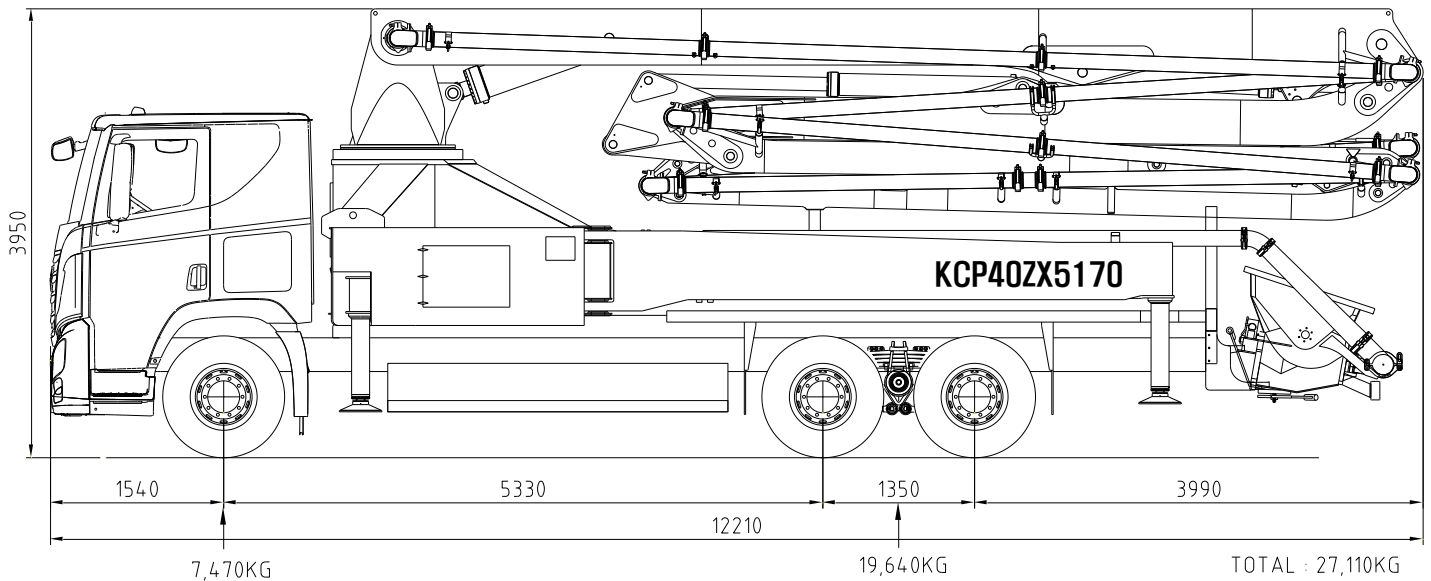
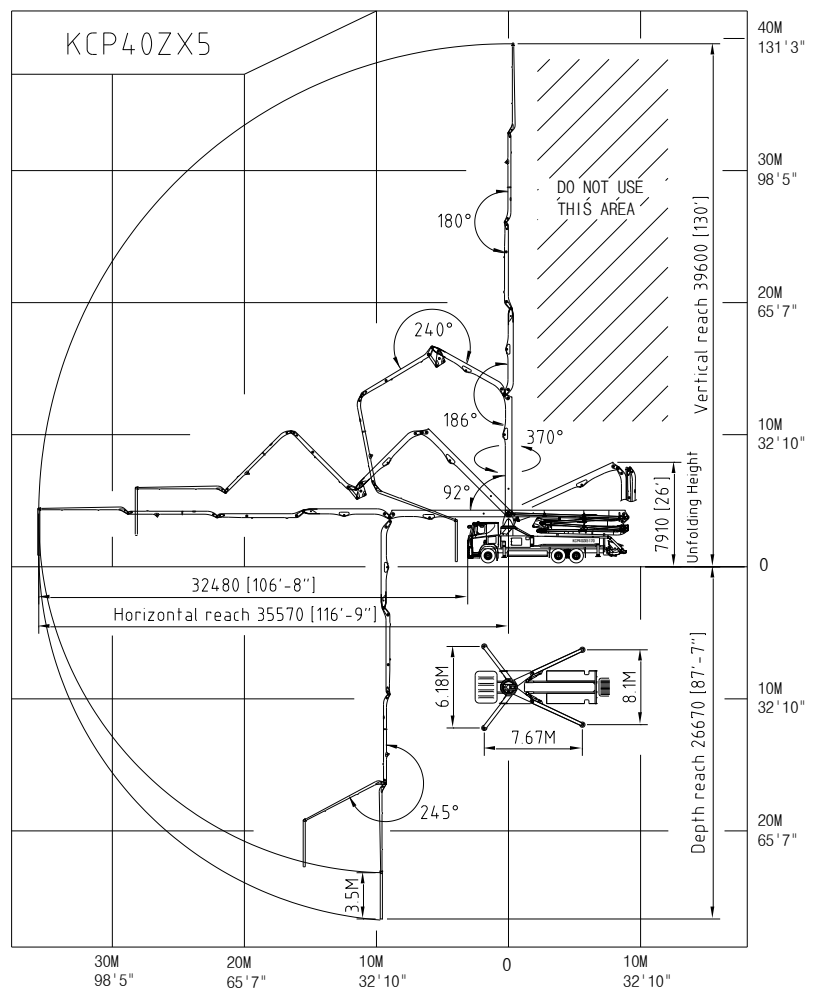


Our Pride ...

KCP40ZX5170**■ Boom specifications**

Vertical reach	39.6 M
Horizontal reach	35.6 M
Reach from front of truck	32.5 M
Unfolding height	7.91 M
Section articulation	92°/186°/240°/180°/245°
Rotation	370°
Delivery line	125 mm
Proportional boom	Yes
End hose length	3.5M
Outrigger spread-front	6.18 M
Outrigger spread-rear	8.1 M
Max.outrigger weight	25,000kg

- ◎ Truck specifications : HYUNDAI – XCIENT 16T (400PS , EURO5)
- ◎ Maximum theoretical values listed.
- ◎ Photos and drawings are for illustrative purpose only
- ◎ Right to make technical amendments reserved

■ Working diagram**■ Pump specifications**

Maximum output	170 m³/h
Concrete cylinder	Ø230×2100
Stroke per minute	32
Concrete pressure	72 bar
Hopper capacity	0.6 m³
S-tube	Ø200×Ø180
Hydraulic pump	KCP - K3V180DT
Cycling system	Hydraulic with manual overrides
Max. aggregate size	40 mm