

TJPK111T[®]



KRB-2TIV

High Production Inter-Rib Knitting Machine



KEUMYONG

www.keumyong.com

KRB – 2TIV

This model's cam system has been manufactured with completely closed cam system in such way to allow high operational speed, with the best stitch formation and high quality Rib fabric which is utilized for the outer wear garments production and for underwear.

MODEL	DIAMETER	GAUGE(N,P,I)	FEEDS	SPEED(R,P,M)
KRB-2TIV	• 30"	14-20	60F	25-30
	32"	14-20	64F	23-27
	36"	14-20	72F	20-22
	40"	14-20	80F	17-20


STANDARD SPECIFICATION

- *Cylinder diameter, needles per inch, number of feeds are described as above, so please order the machine according to requirements
- *AC motor with inverter control unit.
- *Dial and cylinder needle detectors.
- *Positive yarn feeding device.
- *Tube-side creel with double tie.
- *Venti-Cleaner.
- *Oil mist lubricator for needles and cams with dust blower.
- *Spreader size ring system.
- *Speed of machine is depend upon yarn used, knitting condition, gauge etc, the machine speed can be either inersased or decreased
So please select the optimum speed for the machine according to machine condition.
The speed figures on this table are given only as guide.



OPTIONAL PARTS

- *Additional cams when increasing can in cylinder and dial for fabric poential.
- *Plating fabrics can knitted provided yam carrier.
- *Knitting Lycra yams in plating canstruction by using Memminger MER system.

TJPK111T®

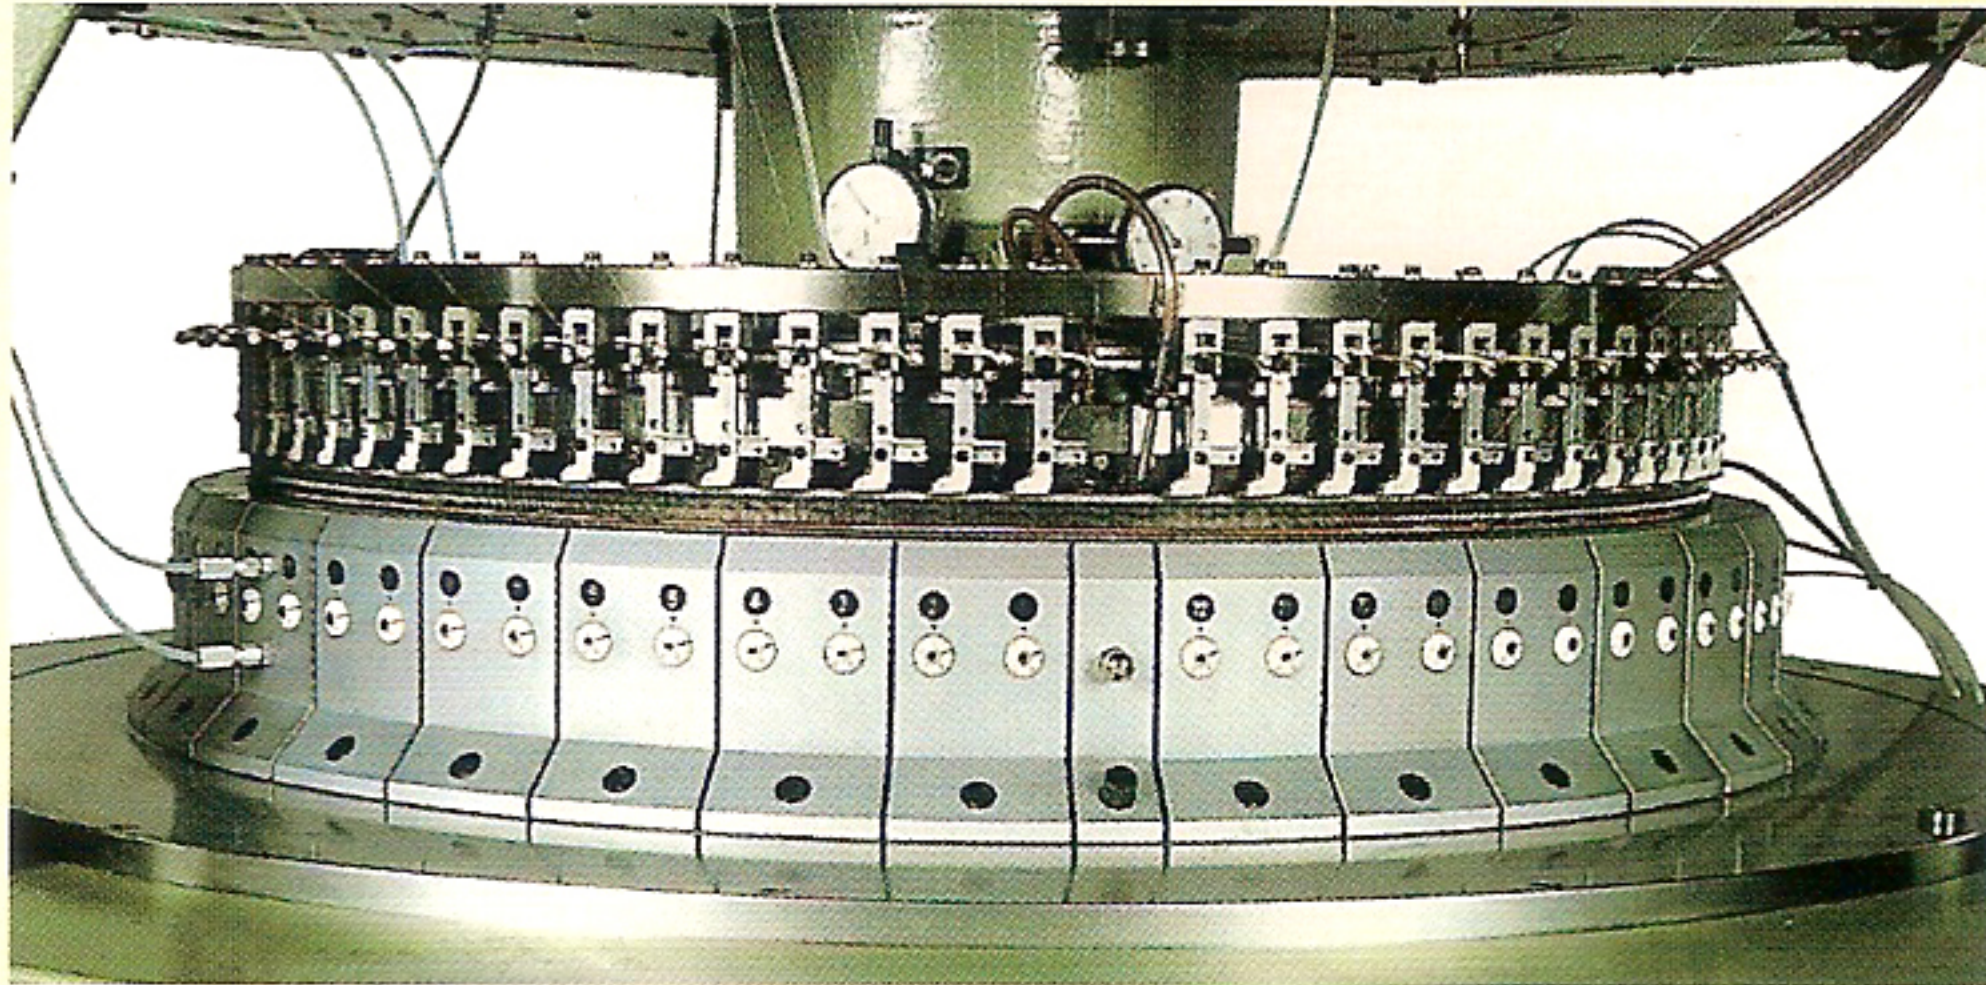

MODEL : KRB-2TIV

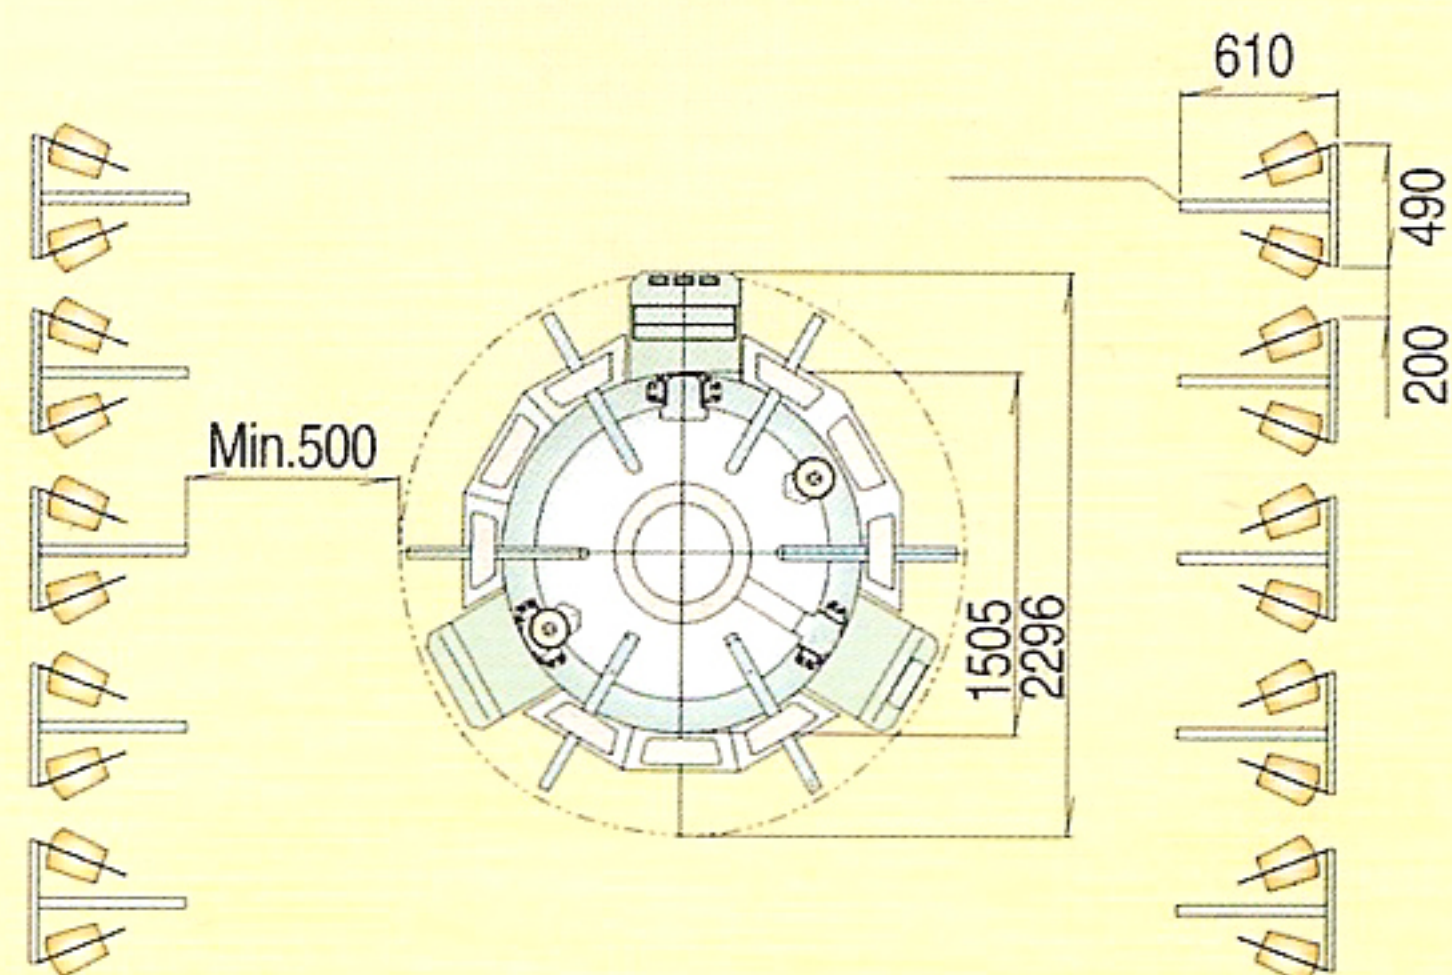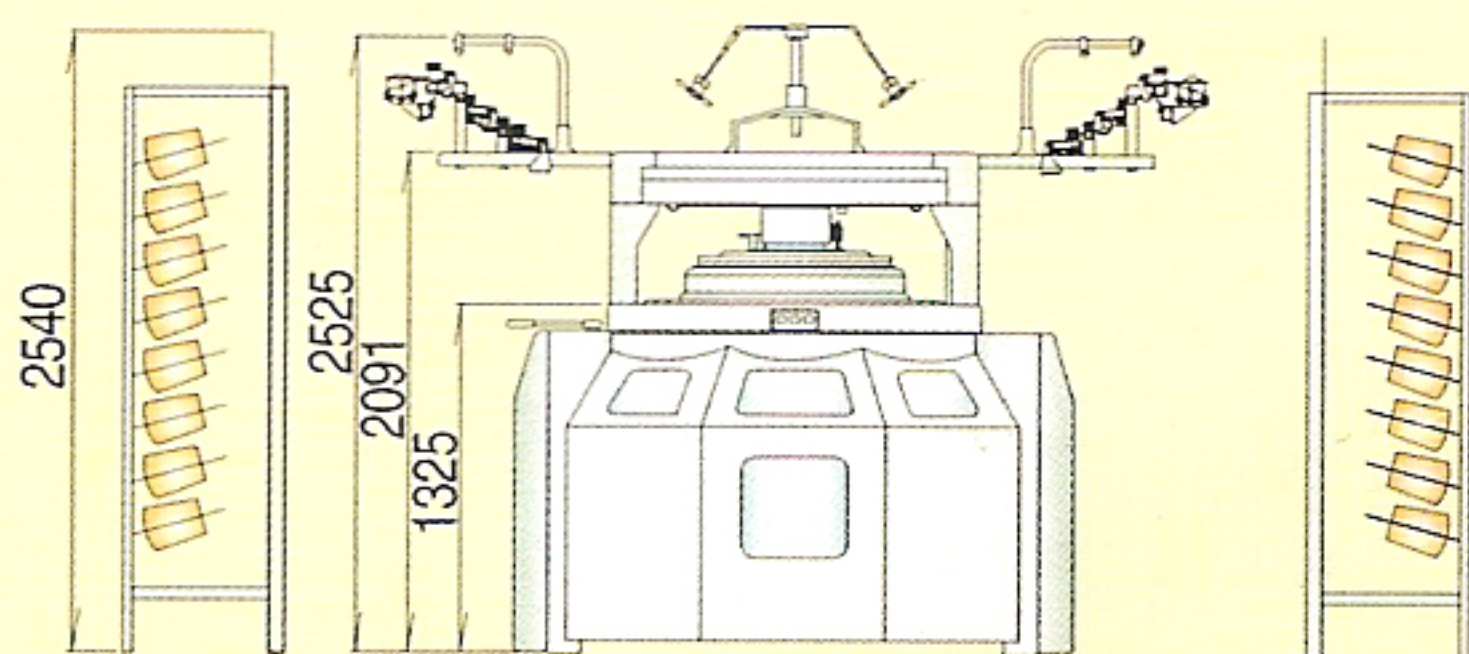

MODEL : KRB-2TIV / 30"

PACKING DIMENSIONS

KRB-2TIV	30" DIAMETER
APPROX. Net weight	2.700kg
APPROX. Gross weight	2.950kg
Case size(mm)	Length Width Height 2370×2250×2300