


Analog Camera

KPC-DI28V12

- 1/3" 960H SONY Super HAD CCD II
- Min. Illumination of 0.2 Lux
- Varifocal Lens
- 2DNR, BLC
- 12VDC Max. 140mA

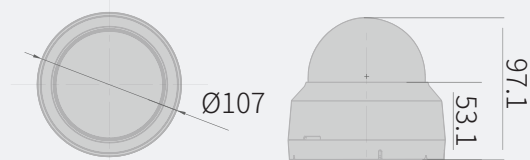


Features

KPC-DI28V12


1/3" 960H SONY Super HAD CCD II
Min. Illumination of 0.2 Lux
Varifocal Lens

2DNR, BLC
12VDC Max. 140mA

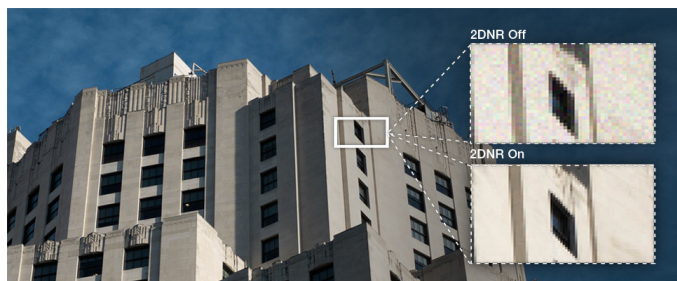

2DNR

DNR technology is crucial for surveillance camera. 2DNR works by analyzing individual frames of video in order to adjust pixels and provide clear image.

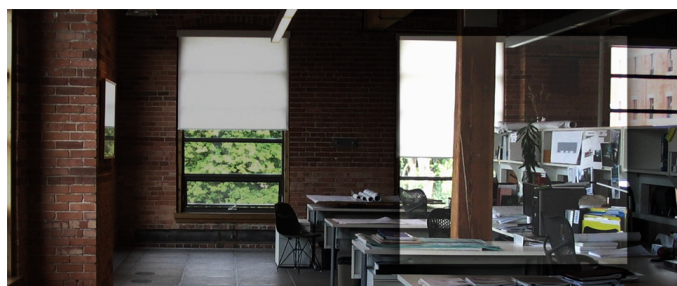


BLC

BLC technology works by reducing the dynamic range of the entire image, while retaining the overall contrast. By compensating for unbalanced in a scene, detail is restored throughout the field of view so as to provide better visibility to identify an object of interest.

Analog Camera

KPC-DI28V12

Dimensions

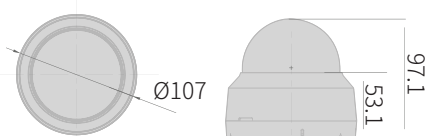

Specifications

Image Sensor	1/3" 960H SONY Super HAD CCD II
Effective Pixels	NTSC: 976(H) x 494(V) PAL: 976(H) x 582(V)
Lens	f=2.8-12mm (2MP)
FOV	f=2.8-12mm (109.4°-37.8°(D))
F-Stop	f=2.8-12mm (F1.6)
Min. Illumination	0.2 Lux (F1.6)
S/N Ratio	>50dB (AGC Off)
Shutter Speed	1/60(1/50) s - 1/100,000 s
Flickerless	-
IR LED	-
IR Distance	-
Day/Night	Electronic D/N
White Balance	ATW/AWB/AWC->SET / Anti-CR / Manual
WDR	D-WDR
BLC	OFF/BLC/HLC
DNR	2DNR
DSS	-
AGC	On

Other Function(s)

Mirror, Camera Title with position, Font Color, Image Contrast/Sharpness, CRT / LCD display optimization, Negative Image, DPC(Dead Pixel Compensation)

Privacy Masking	8 Zones
Motion Detection	4 Zones
Digital Zoom Ratio	-
OSD Control	Built-in Controller
OSD Language	English / Spanish / Portuguese / German / Russian / Japanese / Chinese / French
Service Video Out	Yes
Housing Material	Plastic
IP Rating	-
Operating Temperature	-15°C to 60°C (5°F to 140°F)
Max. Power Consumption	12VDC 140mA 24VAC 2.2W / 12VDC 170mA
Dimensions (W x H x D mm)	(Bubble Ø80) Ø107 x 97.1
Weight	Approx. 240 g (0.53 lbs)

Ordering Information

KPC-DI28V12 (Not all combinations are possible)

Signal Type	Silk Printing	Color
NTSC	KT&C-printed	Black
PAL	OEM-printed	White
	Non-printed	

Accessory for this product

KA-ICMP1