


Analog Camera

KPC-DI36

- 1/3" 960H SONY Super HAD CCD II
- Min. Illumination of 0.1 Lux
- Fixed Boad Lens
- 2DNR
- 12VDC Max. 90mA

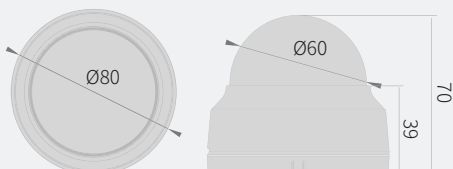

Features



KPC-DI36

1/3" 960H SONY Super HAD CCD II
Min. Illumination of 0.1 Lux
Fixed Boad Lens

2DNR
12VDC Max. 90mA




2DNR

DNR technology is crucial for surveillance camera. 2DNR works by analyzing individual frames of video in order to adjust pixels and provide clear image.

Analog Camera

KPC-DI36

Dimensions

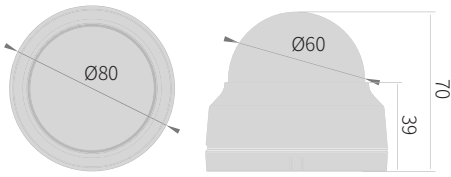

Specifications

Image Sensor	1/3" 960H SONY Super HAD CCD II
Effective Pixels	NTSC: 976(H) x 494(V) PAL: 976(H) x 582(V)
Lens	f=3.6mm / f=4.3mm / f=6mm / f=8mm / f=12mm
FOV	f=3.6mm (94.91°(D))
F-Stop	f=3.6mm (F2.0)
Min. Illumination	0.1 Lux (F2.0)
S/N Ratio	>50dB (AGC Off)
Shutter Speed	1/60(1/50) s - 1/100,000 s
Flickerless	-
IR LED	-
IR Distance	-
Day/Night	Electronic D/N
White Balance	Anti-CR
WDR	-
BLC	-
DNR	2DNR

DSS	-
AGC	On
Other Function(s)	-
Privacy Masking	-
Motion Detection	Plastic
Digital Zoom Ratio	-
OSD Control	-
OSD Language	-
Service Video Out	-
Housing Material	Plastic
IP Rating	-
Operating Temperature	-15°C to 60°C (5°F to 140°F)
Max. Power Consumption	12VDC 90mA
Dimensions (W x H x D mm)	(Bubble Ø60) Ø80 x 70
Weight	Approx. 125 g (0.28 lbs)

Ordering Information

KPC-DI36 (Not all combinations are possible)

Signal Type	Silk Printing	Color
NTSC	KT&C-printed	Black
PAL	OEM-printed	White
	Non-printed	