


HD-SDI Camera

KPC-HDD123M

- 1/3" 2.12MP Progressive Scan CMOS
- Min. Illumination of 0.03 Lux
- Fixed Board / Varifocal Lens
- WDR, 3DNR, DSS, BLC
- 12VDC Max. 150mA

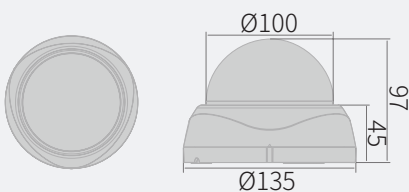

Features

KPC-HDD123M

1/3" 2.12MP Progressive Scan CMOS
Min. Illumination of 0.03 Lux
Fixed Board / Varifocal Lens

WDR, 3DNR, DSS, BLC
12VDC Max. 150mA



WDR

WDR technology helps to get detailed information in harsh lighting, by capturing alternate frames using different exposure times. The frame with longer exposure time captures details in darker parts of the scene, while the frame with shorter exposure time captures the brighter areas. The camera combines the optimal portions of these two complementary frames to produce the most detailed image possible.




3DNR

DNR technology is crucial for surveillance camera. 3DNR works by analyzing the differences between successive frames in order to adjust pixels and improve.



DSS

Digital Slow Shutter (DSS) technology enhances the low light performance of a camera, producing outstanding images in low light conditions. DSS slows the picture frame rate and increases the camera's sensitivity.

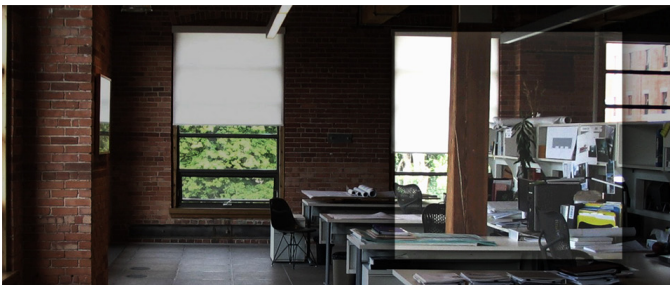


BLC

BLC technology works by reducing the dynamic range of the entire image, while retaining the overall contrast. By compensating for unbalanced in a scene, detail is restored throughout the field of view so as to provide better visibility to identify an object of interest.

HD-SDI Camera

KPC-HDD123M

Dimensions

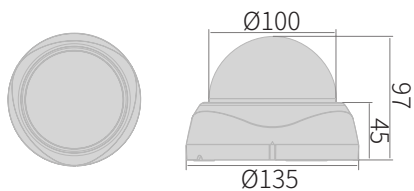

Specifications

Image Sensor	1/3" Progressive Scan CMOS
Effective Pixels	1944 (H) x 1092 (V), 2.12MP
Max. Video Resolution	1080p@30(25)fps / 720p@60(50)fps
Lens	f=3.5-16mm (3MP) / f=3.7mm (3MP) / f=4.3mm (3MP) / f=6mm (3MP) / f=8mm (1.3MP)
FOV	f=3.5-16mm (98.36°- 25.88°) / f=3.7mm (106°) / f=4.3mm (88.28°) / f=6mm (59.47°) / f=8mm (46.47°)
F-Stop	f=3.5-16mm (F1.2) / f=3.7mm (F2.5) / f=4.3mm (F1.8) / f=6mm (F2.0) / f=8mm (F1.8)
Min. Illumination (AGC Max)	0.03 Lux (F1.2, ICR Off, DSS Off) / 0.004 Lux (DSS Max.) / 0.0009 Lux (F1.2, ICR On, DSS Off) / 0.0001 Lux (DSS Max.)
S/N Ratio	>52dB
Shutter Speed	1/30(1/25) s - 1/30,000 s
IR LED	-
IR Distance	-
Day / Night	Electronic D/N
White Balance	Auto / Auto ext / Push Lock / Manual
Digital Zoom Ratio	1x - 20x
WDR	WDR, D-WDR

BLC	OFF/ON(Area adjustable)
DNR	3DNR
DSS	Off - 32x
AGC	12 ~ 60dB
Other Function(s)	FLIP(H/V/HV), HLMASK, Defog
Privacy Masking	16 zones
Motion Detection	Yes
Video Output (Main)	HD-SDI
Video Output (Service)	Composite
OSD Control	Built-in Controller
OSD Language	ENGLISH, RUSSIAN, SPANISH, GERMAN, FRENCH, PORTUGUESE, JAPANESE
Housing Material	Plastic
IP Rating	-
Operating Temperature	-10°C to 50°C (14°F to 122°F)
Max. Power Consumption	12VDC 150mA 24 VAC 2.6W / 12VDC 180mA
Dimensions (W x H x D mm)	Bubble(Ø100) Ø135 x 97
Weight	Approx. 343 g (0.76 lbs)

Ordering Information

KPC-HDD123M (Not all combinations are possible)

Signal Type	Lens	Voltage	Video Cable	Silk Printing	Color
NTSC	f=3.5-16mm (3MP)	12VDC Only	BNC	KT&C-printed	Black
PAL	f=3.7mm (3MP)	Dual (24VAC/12VDC)	Terminal Block	OEM-printed	White
	f=4.3mm (3MP)			Non-printed	
	f=6mm (3MP)				