


HD-SDI Camera

KPC-HNV523M

- 1/3" 2.12MP Progressive Scan CMOS
- 20 IR LEDs up to 20 m (66ft.)
- Fixed Board Lens
- WDR, TDN, 3DNR, DSS, BLC
- IP66
- 12VDC Max. 380mA

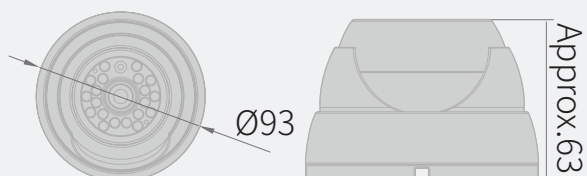


Features

KPC-HNV523M

1/3" 2.12MP Progressive Scan CMOS
20 IR LEDs up to 20 m (66ft.)
Fixed Board Lens

WDR, TDN, 3DNR, DSS, BLC
IP66
12VDC Max. 380mA

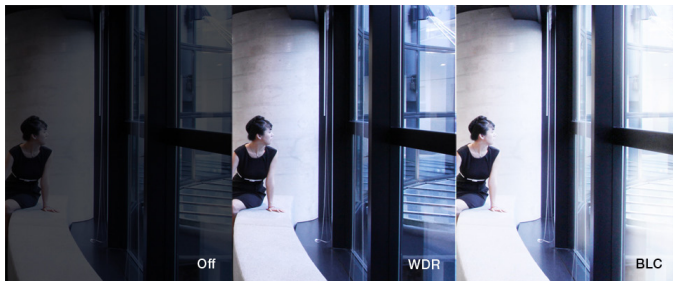


WDR

WDR technology helps to get detailed information in harsh lighting, by capturing alternate frames using different exposure times. The frame with longer exposure time captures details in darker parts of the scene, while the frame with shorter exposure time captures the brighter areas. The camera combines the optimal portions of these two complementary frames to produce the most detailed image possible.



3DNR

DNR technology is crucial for surveillance camera. 3DNR works by analyzing the differences between successive frames in order to adjust pixels and improve.

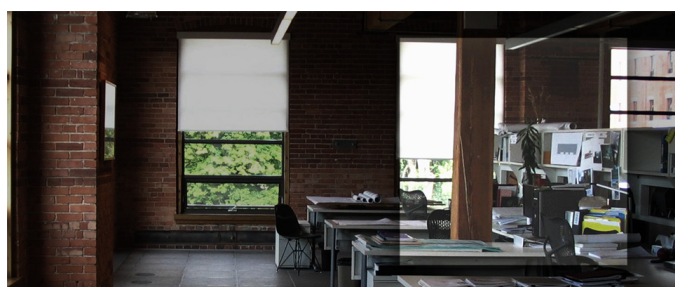

BLC

BLC technology works by reducing the dynamic range of the entire image, while retaining the overall contrast. By compensating for unbalanced in a scene, detail is restored throughout the field of view so as to provide better visibility to identify an object of interest.



TDN

True Day/Night feature can be used for precise color reproduction. With built-in dual filter system, as known as Infrared Cutoff Removal (ICR) mechanism, the infrared cutoff filter can be used at day time, or in bright lighting conditions, to provide enhanced image in full-color. At night time, or in harsh lighting conditions, it will be removed for greater light sensitivity in monochrome mode.



DSS

Digital Slow Shutter (DSS) technology enhances the low light performance of a camera, producing outstanding images in low light conditions. DSS slows the picture frame rate and increases the camera's sensitivity.




IP66

Ingress Protection (IP) rating defines protection against solid objects and liquid on a 0-6 and 0-8 scale. IP66 housing means it's dust-tight and protected against strong jet-water.

HD-SDI Camera

KPC-HNV523M

Dimensions

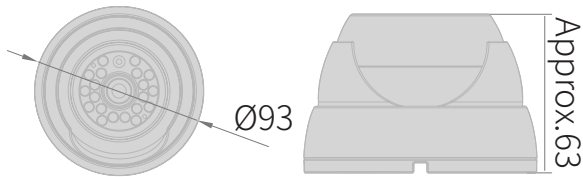

Specifications

Image Sensor	1/3" Progressive Scan CMOS
Effective Pixels	1944 (H) x 1092 (V), 2.12MP
Max. Video Resolution	1080p@30(25)fps / 720p@60(50)fps
Lens	f=3.6mm / f=3.7mm (3MP) / f=6mm (3MP)
FOV	f=3.6mm (99.46°) / f=3.7mm (106°) / f=6mm (59.47°)
F-Stop	f=3.6mm (F2.0) / f=3.7mm (F2.5) / f=6mm (F2.0)
Min. Illumination (AGC Max)	0 Lux (with IR LED On)
S/N Ratio	>52dB
Shutter Speed	1/30(1/25) s - 1/30,000 s
IR LED	20 LEDs (850 nm)
IR Distance	20 m (66 ft.)
Day / Night	True D/N
White Balance	Auto / Auto ext / Push Lock / Manual
Digital Zoom Ratio	1x - 20x
WDR	WDR, D-WDR
BLC	OFF/ON(Area adjustable)

DNR	3DNR
DSS	Off - 32x
AGC	12 ~ 60dB
Other Function(s)	FLIP(H/V/HV), HLMASK, Defog
Privacy Masking	16 zones
Motion Detection	Yes
Video Output (Main)	HD-SDI
Video Output (Service)	Composite
OSD Control	External Control (A/D KEY)
OSD Language	ENGLISH, RUSSIAN, SPANISH, GERMAN, FRENCH, PORTUGUESE, JAPANESE
Housing Material	Aluminium
IP Rating	IP66
Operating Temperature	-10°C to 50°C (14°F to 122°F)
Max. Power Consumption	12VDC 380mA
Dimensions (W x H x D mm)	Ø93 x 63
Weight	Approx. 330 g (0.73 lbs)

Ordering Information

KPC-HNV523M (Not all combinations are possible)

Signal Type	Lens	Optional Cable	Silk Printing	Color
NTSC	f=3.6mm	None	KT&C-printed	Black
PAL	f=3.7mm (3MP)	A/D KEY	OEM-printed	White
	f=6mm(3MP)		Non-printed	