


## HD-TVI Camera

# KTC-TBN6302

- 1/2.8" 2.19MP Progressive Scan CMOS
- Min. Illumination of 0.1 Lux
- C/CS Mount Lens
- WDR, TDN, 3DNR, DSS, BLC
- 12VDC Max. 180mA

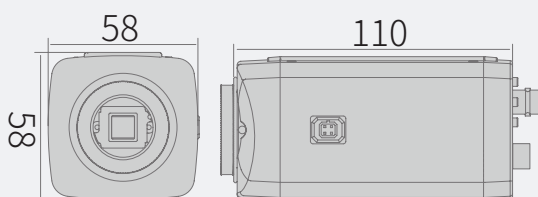


# Features



## KTC-TBN6302

1/2.8" 2.19MP Progressive Scan CMOS  
Min. Illumination of 0.1 Lux  
C/CS Mount Lens

WDR, TDN, 3DNR, DSS, BLC  
12VDC Max. 180mA

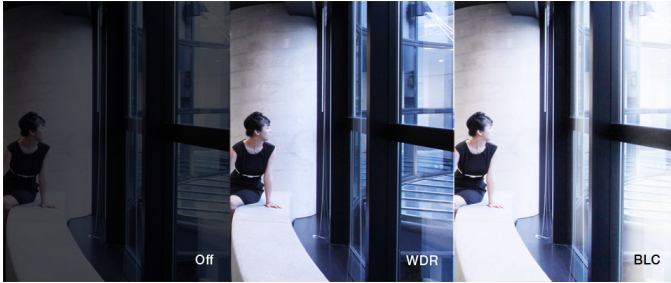

### WDR

WDR technology helps to get detailed information in harsh lighting, by capturing alternate frames using different exposure times. The frame with longer exposure time captures details in darker parts of the scene, while the frame with shorter exposure time captures the brighter areas. The camera combines the optimal portions of these two complementary frames to produce the most detailed image possible.

### TDN

True Day/Night feature can be used for precise color reproduction. With built-in dual filter system, as known as Infrared Cutfilter Removal (ICR) mechanism, the infrared cutfilter can be used at day time, or in bright lighting conditions, to provide enhanced image in full-color. At night time, or in harsh lighting conditions, it will be removed for greater light sensitivity in monochrome mode.




### 3DNR

DNR technology is crucial for surveillance camera. 3DNR works by analyzing the differences between successive frames in order to adjust pixels and improve.

### DSS

Digital Slow Shutter (DSS) technology enhances the low light performance of a camera, producing outstanding images in low light conditions. DSS slows the picture frame rate and increases the camera's sensitivity.

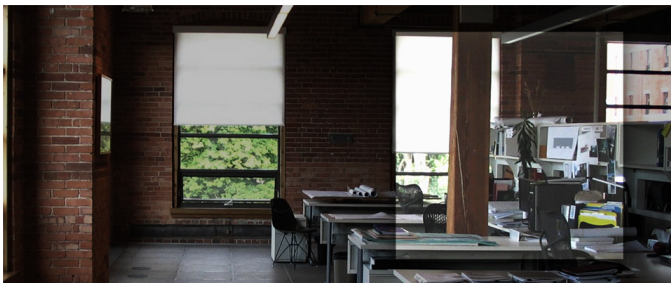


### BLC

BLC technology works by reducing the dynamic range of the entire image, while retaining the overall contrast. By compensating for unbalanced in a scene, detail is restored throughout the field of view so as to provide better visibility to identify an object of interest.

HD-TVI Camera

# KTC-TBN6302

## Dimensions

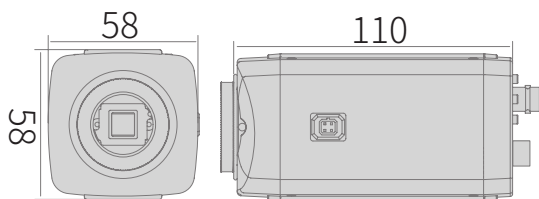

## Specifications

Image Sensor	1/2.8" Progressive Scan CMOS
Effective Pixels	1984(H) x 1105(V), 2.19MP
Max. Video Resolution	1080p@30(25)fps / 720p@30(25)fps
Lens	C/CS Mount Lens
FOV	
F-Stop	
Min. Illumination (AGC Max)	0.1 Lux (F1.0, ICR Off, DSS Off) / 0.006 Lux (DSS On) 0.07 Lux (F1.0, ICR On, DSS Off) / 0.003 Lux (DSS On)
Shutter Speed	1/30(1/25) s - 1/30,000 s
IR LED	-
IR Distance	-
Day / Night	True D/N
White Balance	Auto / Push Lock / Manual
Digital Zoom Ratio	1x - 8x
WDR	WDR
BLC	Off / BLC / HLC
DNR	3DNR
DSS	Off ~ 16x

AGC	Off ~ 42dB
Other Function(s)	MIRROR/BRIGHTNESS/SHARPNESS
Privacy Masking	8 zones
Motion Detection	Yes
Transmission Distance	500 m
Video Output (Main)	HD-TVI
Video Output (Service)	CVBS
OSD Control	Built-in Controller, External Control (TVI-UTC)
OSD Language	ENGLISH / SPANISH / RUSSIAN / GERMAN / PORTUGUESE / FRENCH / JAPANESE
Housing Material	Aluminium
IP Rating	-
Operating Temperature	-10°C to 50°C (14°F to 122°F)
Max. Power Consumption	12VDC 180mA 24VAC 3.4W / 12VDC 240mA
Dimensions (W x H x D mm)	58 x 58 x 110.4
Weight	Approx. 220 g (0.48 lbs)

## Ordering Information

KTC-TBN6302 (Not all combinations are possible)

Signal Type	Voltage	Video Cable	Silk Printing	Color
NTSC	12VDC Only	BNC	KT&C-printed	Black
PAL	Dual (24VAC/12VDC)	Terminal Block	OEM-printed Non-printed	Silver