

Power Start Connector Series



KDP5-500R CONNECTOR

► Standard Materials & Finishes

Shell : Single piece polychloroprene moulding
Insulator : Neoprene
Contacts : Copper alloy coaxial, tin plated

► Mechanical Features


Coupling : 'Push-pull' friction
Contact Type : Solder or crimp with straight bolt on lugs for
size 0000 AWG to 4 AWG cable
Contact Arrangements : Single pole coaxial construction

► Electrical Data

Rated Current : 500 amps
Voltage Rating : 28V DC
Contact Resistance : 0.5 milliohms max
Temperature Rating : -55 °C to +100 °C

Power Start Connector Series

► Dimension

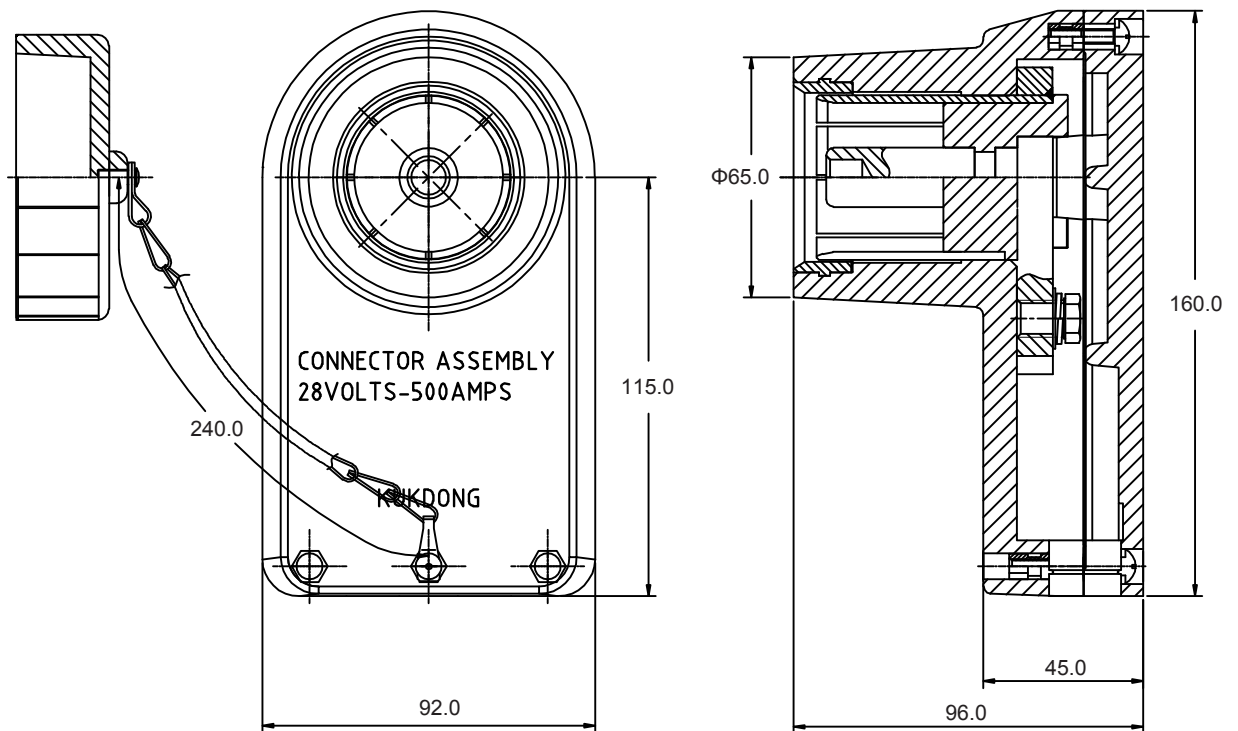

KDPS-500R CONNECTOR

Power Start Adapter Series



KDPS-500RA ADAPTER

► Standard Materials & Finishes

Shell : Single piece polychloroprene moulding
Insulator : Neoprene
Contacts : Copper alloy coaxial, tin plated

► Mechanical Features



Coupling : 'Push-pull' friction
Contact Type : Solder or crimp with straight bolt on lugs for
size 0000 AWG to 4 AWG cable
Contact Arrangements : Single pole coaxial construction

► Electrical Data

Rated Current : 500 amps
Voltage Rating : 28V DC
Contact Resistance : 0.5 milliohms max
Temperature Rating : -55 °C to +100 °C

Power Start Connector Series

► Dimension

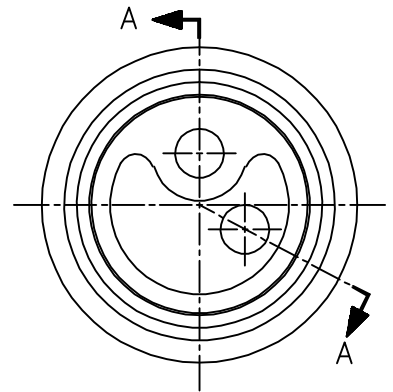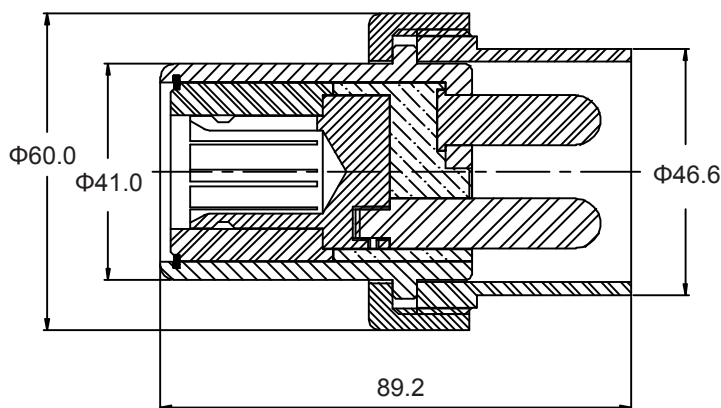

KDPS-500RA ADAPTER