


KD3454 Series

Key Position

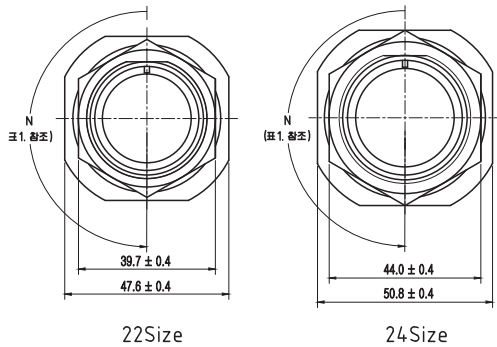

Key way	Angle
N or Blank	180°
X	110°
Y	250°



Electrical Data

- 절연저항 : 5,000 Mohm / DC 500V 이상일것
- 내전압 : AC 2,000V 에서 1분간 아크, 절연파괴 현상이 없을 것



► Contact Arrangements : Please refer to the MIL-DTL-5015 catalogs

Connector Dimensions


KD3454M

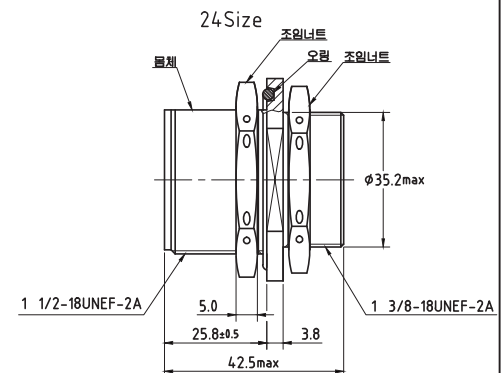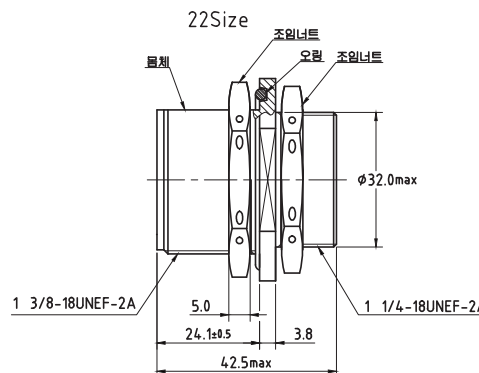

KD3454MR

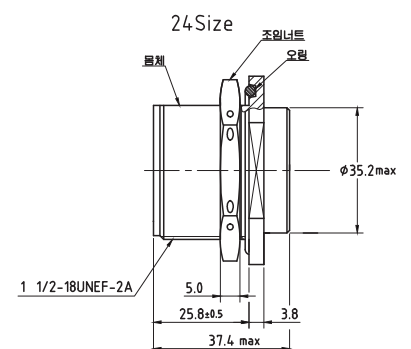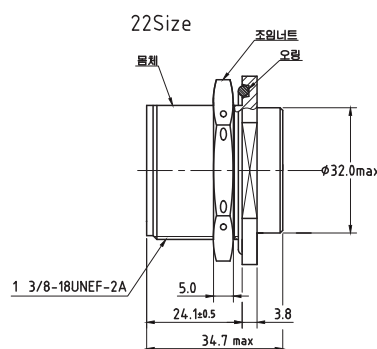

KD25043 - N style < CAP >

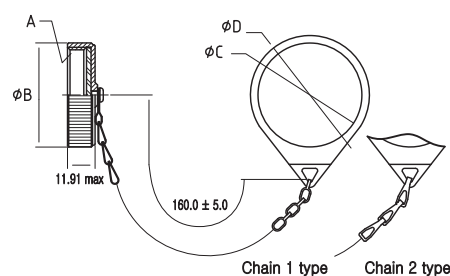

부품 번호	A THD - 2B	ϕB max	ϕC min	ϕD max
KD25043-22N	1 3/8-18UNEF	40.49	35.1	42.0
KD25043-24N	1 1/2-18UNEF	43.66	41.4	48.0

◆ Material
Chain 1 type : Copper alloy
Chain 2 type : Stainless steel