



Product Catalog Termination

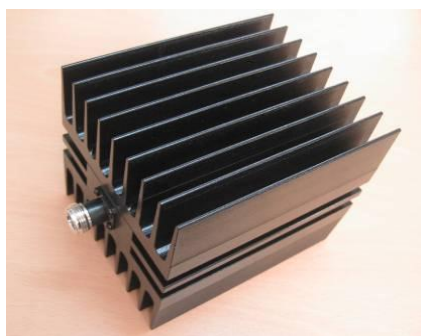




INDEX

Model Name

- ◆ Termination Load, 0 ~ 3000 MHz
- ◆ 7/16 Din Termination Load, 0 ~ 3000 MHz
- ◆ Termination Load, 0 ~ 2500 MHz

Product Specifications

Termination Load, 0 ~ 3000 MHz LCT717100-01

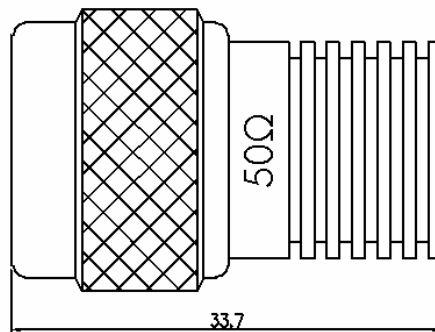

CHARACTERISTICS

DIMENSION(Unit : mm)

General Specifications

Device Type	Termination Load
Interface	N Male

Electrical Specifications



Operating Frequency Band	0 ~ 3000 MHz
Impedance	50 ohm
Return Loss	23 dB
VSWR	1.15 : 1
Average Power, maximum	5 W
Peak Power, maximum	2 kW
Operating Temperature / Humidity	-40℃ to +70 °C / Up to 95%

Mechanical Specifications

Inner Contact Plating	Silver
Outer Contact Plating	SUCO

Product Specifications

7/16 Din Termination Load, 0 ~ 3000 MHz LCT818100-01

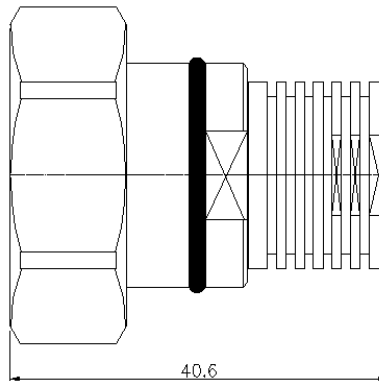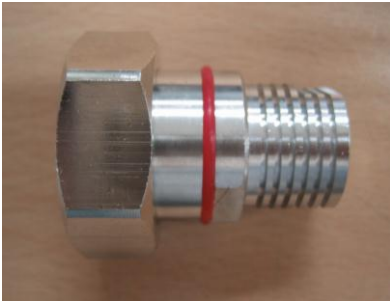

CHARACTERISTICS

DIMENSION(Unit : mm)

General Specifications

Device Type	Termination Load
Interface	7/16DIN Male

Electrical Specifications



Operating Frequency Band	0 ~ 3000 MHz
Impedance	50 ohm
Return Loss	23 dB
VSWR	1.15 : 1
Average Power, maximum	5 W
Peak Power, maximum	2 kW
Operating Temperature / Humidity	-40℃ to +70 °C / Up to 95%

Mechanical Specifications

Inner Contact Plating	Silver
Outer Contact Plating	SUCO

Product Specifications

Termination Load, 0 ~ 2500 MHz LCT727200-01

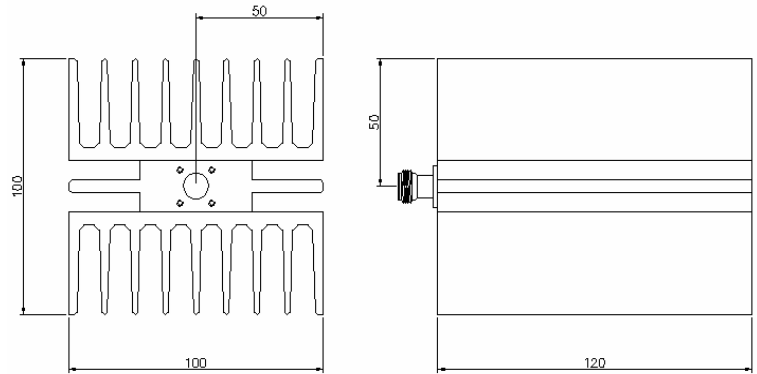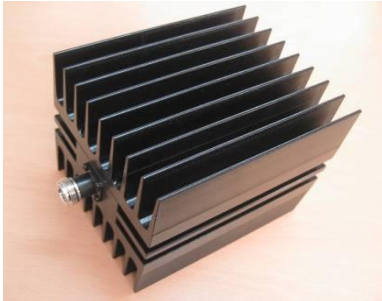

CHARACTERISTICS

DIMENSION(Unit : mm)

General Specifications

Device Type	Termination Load
Interface	N Female

Electrical Specifications

Operating Frequency Band	0 ~ 2500 MHz
Impedance	50 ohm
Return Loss	23 dB
VSWR	1.15 : 1
Average Power, maximum	50 W
Peak Power, maximum	2 kW
Operating Temperature / Humidity	-40℃ to +70 °C / Up to 95%

Mechanical Specifications

Inner Contact Plating	Silver
Outer Contact Plating	SUCO