

Magswitch Technology, Inc. 8774 Yates Dr. Suite 140 Westminster, CO 80031 Magswitch.com.au 303-468-0662


Magswitch E50-900/660 CE with remote P/N: 8100387

Magswitch LAY series utilizes field interaction between individual magnets to increase depth of field and spread the attractive force over a larger footprint. This allows for greater working loads and increased control over larger work pieces. With customizable pole shoes to fit almost any application, the LAY is a great all around tool that is perfect for picking pipe and round as well as large plate steel.




WARNING! Do Not Operate Unless In Contact With Ferrous Target


SPECIFICATIONS	
P/N: 8140393 - MAGSWITCH PLAY50x3 MDC	
Max Breakaway*	1800 lbs/816.5 kg
Safe Working Load*	600 lbs/272.2 kg
Full Saturation Thickness	1/2" / 12.7mm
Max Safe Shear*	360 lbs/163.3 kg
Minimum Thickness for De-Stack	1/2" / 12.7mm
Net Weight	8.8 kg
Mounting Thread	M6x1.0
Overall Height	321.8 mm
Magnetic Pole Footprint	171x71.12 mm

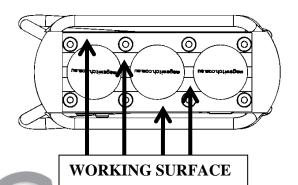


Part Number 110674 Revision Date: April 18, 2012

^{*} Max Breakaway determined in laboratory environment on 2" thick SAE1018 Steel with surface roughness 63 micro inches. Many factors contribute to the actual breakaway force in each application. Always test the magswitch in each application before deployment. Refer to the magswitch information booklet for more information.

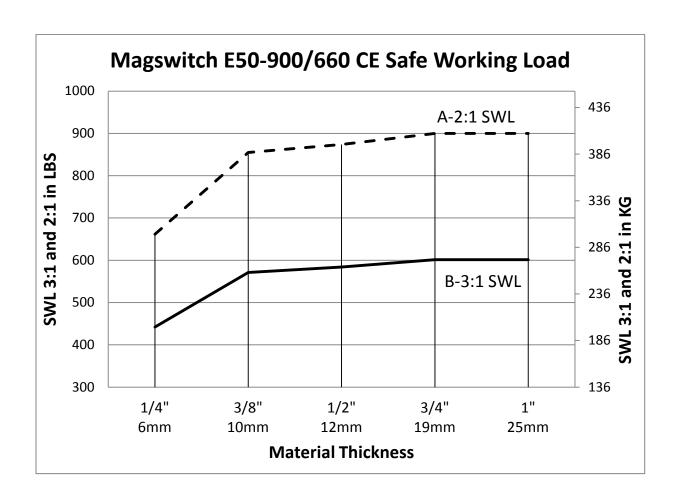



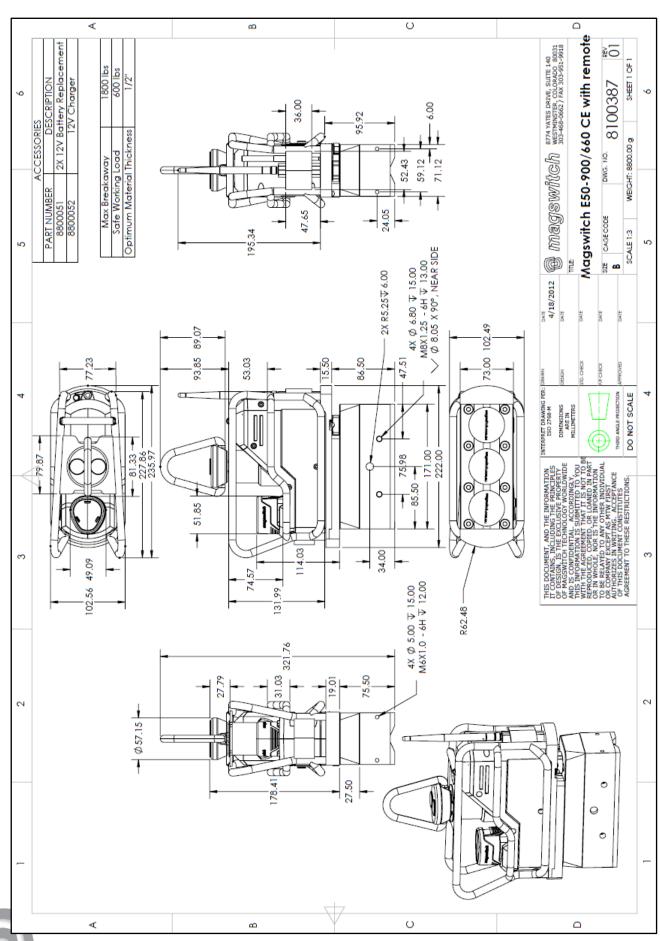

Part Number 110674 Revision Date: April 18, 2012