


1X4, 1X8 UHD HDMI DISTRIBUTION AMPLIFIER

IHX-14UD, IHX-18UD

Image

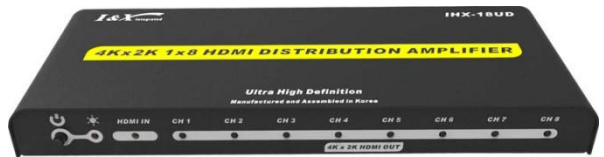

<IHX-14UD>

<IHX-18UD>

Feature

IHX-18UD does distribute 8 identical HDMI outputs from HDMI 1(one) input Source, supports **UHD(4Kx2K)** up to **3840X2160 @30Hz**.

- Support UHD (4K x 2K)
- Support HDCP 1.3Ver
- Support MIXED EDID
- Support 3D



1X4, 1X8 UHD HDMI DISTRIBUTION AMPLIFIER

IHX-14UD, IHX-18UD



Specification

Date Rate	Max 2.97Gbps
Input / Output Channel	IHX-14UD : HDMI Input 1 Channels / HDMI Output 4 Channels IHX-18UD : HDMI Input 1 Channels / HDMI Output 8 Channels
Input / Output Connector	HDMI Type A Connector
HDMI Compliance	HDMI 1.4b Specifications
Input/Output Signal	TMDS Signal
Remarks	<ul style="list-style-type: none">▪ 4K x 2K(3840x2160/30Hz) Formats Support▪ 3D Support▪ HDCP 1.3Ver Support▪ Mixed EDID Function Support
Power Consumption	DC +5V / 3A Adapter
Operating Conditions	<ul style="list-style-type: none">▪ Temperature : 0 ~ 40 °C▪ 80% Humidity, Non-Condensing

