

MCPU-1208D

Camera Power Control Unit



장비개요 및 성능

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>


Description

- 본 장비는 Camera Power Controller로서 여러 곳이나 한자리에 다수로 설치된 Camera Power를 공급하고 Remote로 ON/OFF 할 수 있는 장비이다.

Features

- 기능은 Remote 제어시 개별 제어 및 ALL 제어기능이 있으며 주변기기와 I/F하여 운영 S/W로도 제어가 가능하다.
- 장비의 Front에 제어용 Switch가 부착되었으며 S/W에 의한 제어와 통신제어 및 Lan 제어가 가능토록 Port를 내장하고 있다.
- Camera Power공급은 DC12V를 공급하며, 수용 채널은 8채널이다.

Panel Drawing

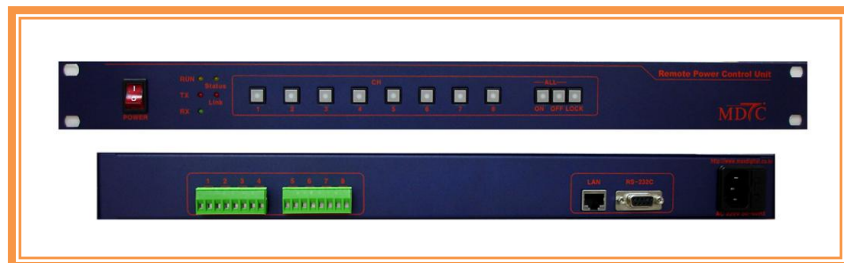

Specifications

- General Part
 - CPU : One Chip 8 Bit Micro Processor 89C52
 - Memory : 93C66
 - Communication serial asynchronous : RS-232C 9600BPS, N, 8, 1, TCP/IP
 - Output port : 8 channel
 - Output power : DC 12V
 - Control method : manual, program control
 - Control shape : one on/off, all on/off
 - Correspondent ports enable to control operating software : RS-232C, TCP/IP

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved.
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217

MCPU-1208D

Camera Power Control Unit



장비개요 및 성능

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

■ Specifications

○ Case & Power Part

- Power source : AC 85 ~ 240V 50 ~ 60Hz
- Temperature : 0°C ~ 40°C
- Power consumption : Below 30Watt
- Type : 19" Rack Type
- Dimensions : 483(W) * 44.5(H) * 300(D) mm

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

Asia
China
Singapore
Korea

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217