

MAVS-4801

A/V Selector Switcher



장비개요 및 성능

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

Description

- 본 장비는 48개의 입력된 Analog Audio & Video 신호를 해당출력 1 Channel에 선택하여 절체시켜주는 장치이다.

Features

- 전면의 조작 KEY로 원하는 입력을 제어할 수 있으며, RS-232C Port를 이용하여 Remote 제어 가능토록 되어 있다.
- 전원 OFF시에도 최종 연결 상태값을 가지고 있도록 Memory Back-up 기능이 있다.
- FND DISPLAY 채용으로 출력되는 입력상태를 확인 할 수 있다.
- 외부 방송장비와 VIDEO SYNC를 맞추기 위한 SYNC 단자가 있다.

Panel Drawing



Specifications

- Audio Part
 - Input/Output number : 48 x 1
 - Input/Output type : Unbalanced stereo, 600ohm
 - Input/Output connector : RCA
 - Max level : 14dBm
 - Frequency response : $\pm 0.1\text{dB}$ (20Hz ~ 20kHz)
 - Crosstalk : below 80dB
 - S/N : below 70dB (20Hz ~ 20kHz)

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

Asia	+65 81335582	Fax. +65 67828910
China	+86 021 54249750	Fax. +86 021 54240199
Singapore	+65 81335582	Fax. +65 67828910
Korea	+82 2 2026 1200	Fax. +82 2 2026 1217

MAVS-4801

A/V Selector Switcher




장비개요 및 성능

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

Specifications

- Video Part
 - Input/Output number : 48 x 1
 - Input/Output type : Composite video 1Vp-p, 75ohm
 - Input/Output connector : BNC
 - Frequency response : $\pm 0.1\text{dB}$ (750KHz ~ 4.7MHz)
 - Differential phase error : 0.1°
 - Differential gain error : 0.1%
 - Crosstalk : below 60dB
 - Sync : Standards, BNC, 75ohm
- Remote Control Part
 - Serial control : 1 RS-232/422, D-sub 9pin connector
- Case & Power Part
 - Power source : AC 85 ~ 240V 50 ~ 60Hz
 - Temperature : 0°C ~ 40°C
 - Power consumption : Below 70Watt
 - Type : 19" Rack Type
 - Dimensions : 483(W) * 133.5(H) * 300(D) mm

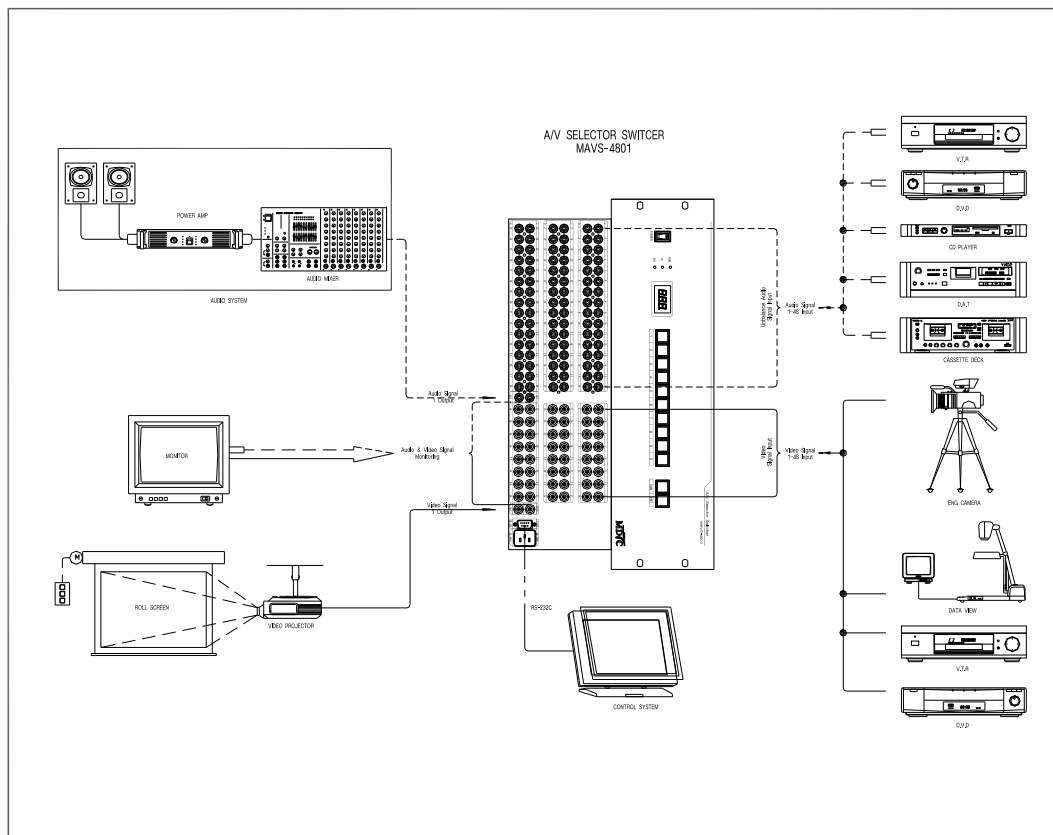

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

Asia
China
Singapore
Korea

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217