

MRMS-801D

RGB Selector Switcher



Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>


Description

- It allows 8 RGB input signals with R.G.B.HD.VD. to be switched to one compatible display device.

Features

- Built-in Control Switch is in front of the equipment. This built-in communication port enables external communication device such as operation system and interface control.
- D-sub Connector at input/output terminal makes operation easy.
- The front LED panel enables easy view of inputs and outputs. Memory Back-up function helps to save and reconnect the last status while it is turned off.
- 8 selector switches with lamps which allow to control individually.

Panel Drawing

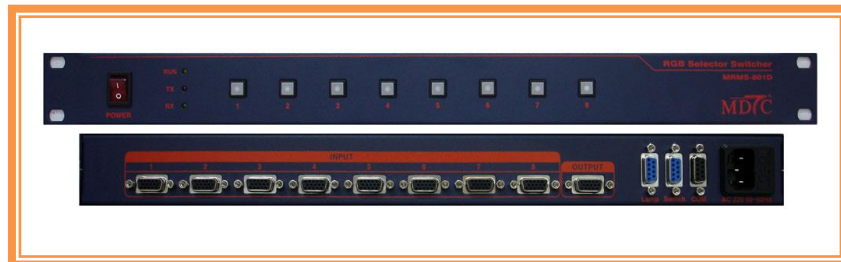

Specifications

- Video Part
 - Input/Output number : 8 x 1
 - Input/Output type : RGBHV
 - Input/Output connector : d-sub 15pin
 - Input/Output level : analog RGB : 1.2Vp-p Max, H-Sync, V-Sync : TTL level
 - Input/Output impedance : 75Ohm $\pm$ 1%
 - Bandwidth : 600 MHz (-3 dB), fully loaded

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217

MRMS-801D

RGB Selector Switcher




Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

Specifications

- Remote Control Part
 - Serial control : 1 RS-232, D-sub 9pin connector
 - Lamp out : +12V
 - Remote input : dry Contact
- Case & Power Part
 - Power source : AC 85 ~ 240V, 50 ~ 60Hz
 - Temperature : 0°C ~ 40°C
 - Power consumption : below 20Watt
 - Type : 19" rack type
 - Dimensions : 483(W) * 44.5(H) * 300(D) mm

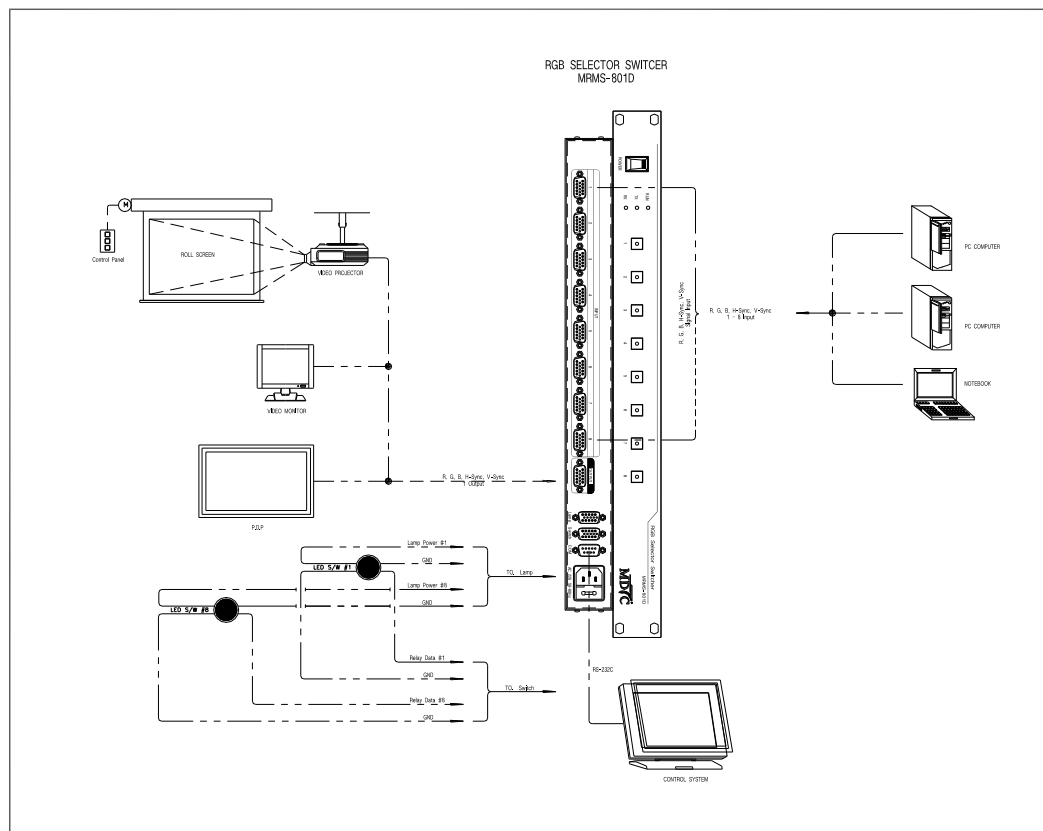

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved.
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217