

Description

- It allows 8 RGB input signals with R.G.B.HD.VD. to be switched to one compatible display device.

Features

- Controlled via the front panel switches, built-in correspondent ports enable to control operating software and interface. A rear bnc connector makes operation easy.
- LED helps to view and confirm status of the selected switch and the communicated remote control.

Panel Drawing



Specifications

- Video Part
 - Input/Output number : 8 x 1
 - Input/Output type : RGBHV
 - Input/Output connector : 5 BNC
 - Input/Output level : analog RGB : 1.2Vp-p Max, H-Sync, V-Sync : TTL level
 - Input/Output impedance : 75Ohm $\pm$ 1%
 - Bandwidth : 600 MHz (-3 dB), fully loaded

MRMS-801

RGB Selector Switcher




Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

■ Specifications

- Remote Control Part
 - Serial control : 1 RS-232, D-sub 9pin connector
- Case & Power Part
 - Power source : AC 85 ~ 240V, 50 ~ 60Hz
 - Temperature : 0°C ~ 40°C
 - Power consumption : below 20Watt
 - Type : 19" rack type
 - Dimensions : 483(W) * 89(H) * 300(D) mm

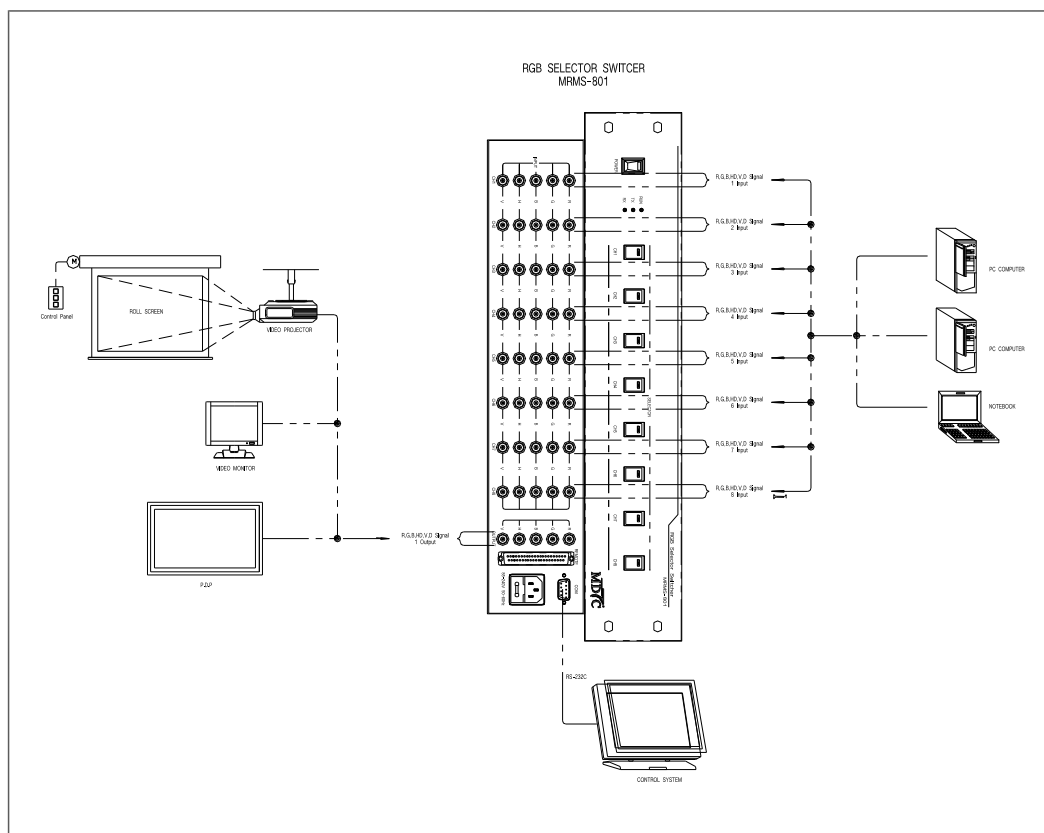

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved.
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217