


POS PRINTER



SLK-T42

- Compact Size
- Tear bar type / Auto cutter (optional)
- Dual interface : USB + Serial
- High speed printing : 200mm/sec

APPLICATIONS

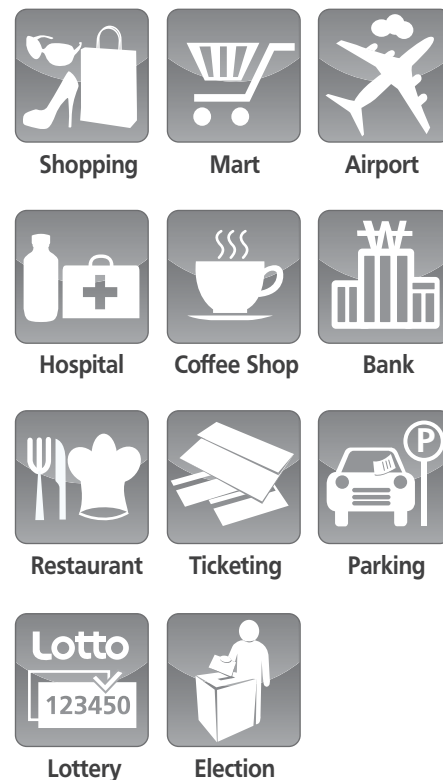


www.miniprinter.com



2inch Compact size Thermal Printer

SLK-T42



Item		Specification	Item		Specification
PRINTING	METHOD	Direct Thermal	SENSOR		Paper End, Cover Open
	SPEED	Max. 200mm/sec	CASH DRAWER DRIVER		2 circuits (24V, 1A max)
	WIDTH	54mm(432 Dots/Line)	INTERFACE		USB(A type)+Serial(RS-232C) Built-in
	RESOLUTION	203DPI	EMULATION		ESC/POS Command Compatible
	DOT PITCH(mm)	0.125mm x 0.125mm	DRIVER	Windows Printer Driver(8, 7, XP, 2000, 2003, VISTA, 32&64bit, XP Embedded), WEPOS, OPOS, Linux, JavaPOS	
	DIRECTION	Unidirectional with Friction Feed			
CHARACTER PER LINE	Font A (12 x 24)	36 columns	POWER	TYPE	External SMPS
	Font B (9 x 17)	48 columns		AC	100 ~ 240Vac 50/60 Hz
PAPER	TYPE	Thermal Paper		DC	24Vdc / 2.5A
	WIDTH	59mm ± 0.5mm	AUTO CUTTER	TYPE	Guillotine
	THICKNESS	0.06mm ~ 0.09mm		LIFE	1,000,000 Cuts
	ROLL DIAMETER	Max. ø 60mm		PAPER THICKNESS	0.06 ~ 0.09mm
RELIABILITY	ROLL CORE INNER	12.5mm ± 0.5mm	TEMPERATURE	CUTTING METHOD	Partial Cut
	TPH LIFE	100Km		OPERATION	0 ~ 45°C
CHARACTER SET	MCBF	60,000,000Lines	HUMIDITY	STORAGE	-20 ~ 60°C
	ALPHANUMERIC CHARACTER	95		OPERATION	35 ~ 80%
	ALPHANUMERIC CHARACTER	128 x 18Page (1 space page)	WEIGHT	STORAGE	10 ~ 90%
BARCODE	INTERNATIONAL CHARACTER	14		INCLUDE AUTO CUTTER	0.88kg
	EAN-8, EAN-13, Code 39, ITF, UPC-A, Codabar, Code 93, Code 128, PDF 417(2D)		DIMENSION(W x D x H)		120 x 182 x 106 mm
			COLOR		Cool grey, Ivory

● All specification and desings are subject to change without notice.

INTERFACE



ACCESSORY



Melody box



J. STEPHEN Lab., Ltd.

28-6, Gajangsaneopdong-ro, Osan-si, Gyeonggi-do, 447-210 Republic of Korea

T.+82-31-8077-5000 F.+82-31-459-8880

www.miniprinter.com

