

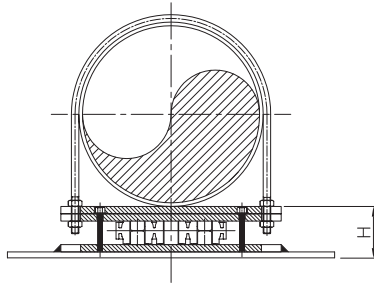


SRH-U Spring Rubber Mount (Deflection: 5.5mm)

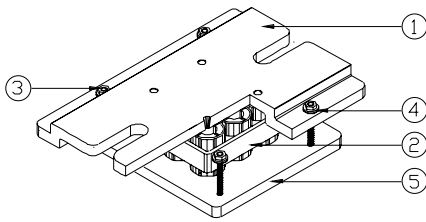

■ Features

It is an upgraded mount designed to control vibration from horizontal pipes using SRP type spring rubber pad with advantages of anti-vibration rubber and metal spring. SRH type is installed on top of steel structure individually or together to better absorb vibration from pipes. Plus, U-bolt slot hole is on steel plate of top and bottom housings, which facilitates installation and prevents pipes from getting out of their original location.

■ Usage

For horizontal pipes

■ Specification

No.	Name of Components	Material	Standard
1	Upper Housing	SS400	KS D 3503
2	SRP PAD	SUP9	KS B 2402
		CR	KS M 6617
3	Bolt & Nut	SS400	KS B 1002
4	Guide Rubber	CR	KS M 6617
5	Base Plate	SS400	KS D 3503

■ Dimension & Selection Guide

Pipe Diameter	SRP	A	B	C	H
φ50	A(100,200)	110	110	86	40
φ65		110	110	86	40
φ80		120	120	74	40
φ100		150	120	74	40
φ125		175	120	74	40
φ150		200	120	74	40
φ150	B(400~800)	200	150	122	42
φ200	B(400~800)	270	210	122	42
φ250	B(400~800)	320	260	122	42
φ250	C(1000~2000)	320	260	140	42
φ300	B(400~800)	380	300	122	42
φ300	C(1000~2000)	380	300	140	42
φ350		420	320	140	42
φ400		470	400	140	42
φ450		520	420	140	42
φ500		570	500	140	42

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.