

VWM62 Wire-Spring Mount (Deflection: 50mm)





Vibration
Control



ISO 9001/ISO 14001
OHSAS 18001
MADE IN KOREA

※ The model name of VWS product has changed to VWM62

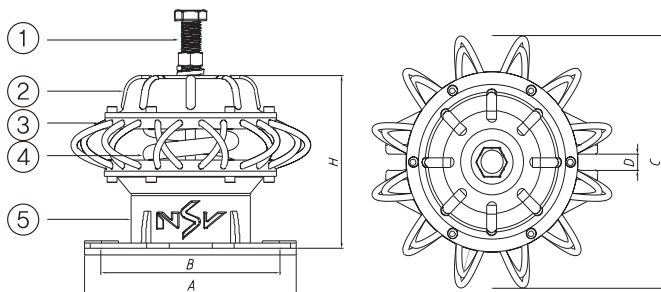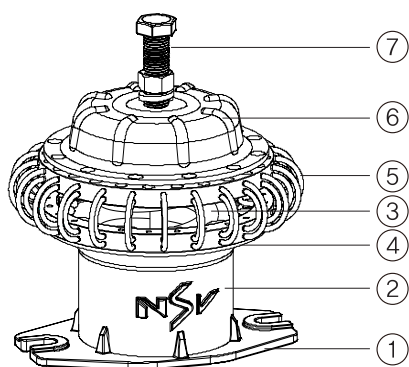

■ Features

VWM62 offers elasticity of coil spring and excellent attenuation effect of wire rope, ensuring vibration isolation and dynamic stabilization of equipment.
enhanced strength of wire mount helps bear large loads

■ Usage

- ◆ For equipment that requires vibration isolation and dynamic stability
- ◆ For equipment that needs a buffer
- ◆ For equipment that needs horizontal elasticity
- ◆ For cooling towers, reciprocating compressors and steam blowers
- ◆ For equipment that needs to control noise directing the floor right below

■ Specification

No.	Name of Components	Material	Standard
1	Lower Non Skid Pad	CR	KS M 6617
2	Lower Housing	STS304	—
3	Coil Spring	SUP9	KS B 2402
		HSW3	KS B 2403
4	Retainer Bar	STS304	—
5	Wire Rope	STS304	KS D 3514
6	Upper housing	STS304	—
7	Level Bolt	SS400	KS B 1002

■ Dimension & Selection Guide

Type	Capacity (kgf)	Spring Constant (kgf/mm)	Color	Dimension(mm)						
				A	B	C	D	E	H	Leveling Bolt
VWM62-100	100	2	Blue	210	180	135	15	235	165	M16×80
VWM62-150	150	3	Brown							
VWM62-200	200	4	White							
VWM62-300	300	6	Orange							
VWM62-400	400	8	Pink							
VWM62-500	500	10	Green							
VWM62-600	600	12	Blue							
VWM62-750	750	15	Black							
VWM62-1000	1000	20	Yellow							
VWM62-1200	1200	24	Red							
VWM62-1500	1500	30	Black							

(NOTE) The mentioned size and scale can be altered to improve the quality performance and capacity of the product without any notice.