



BHS-TYPE

FEATURES ;

- Accuracy guaranteed to 0,002mm TIR(0,0001").
- Excellent for grinders and CNC lathes.
- Heat-treated point to HRC 60±2.
- Three angular contact bearings for superior performance.
- Anti-friction seal for coolant deflectors and high speed.
- High RPM, up to 12,000.
- Heat-treated body for extra strength, rigidity and long life.
- Drain hole have to be located on bottom side.

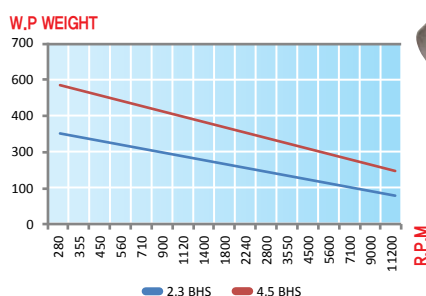

BHS type technical data

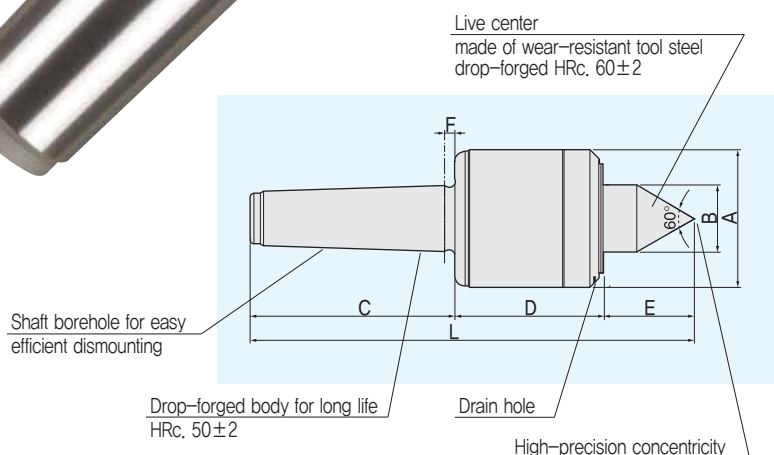

Dimension


04	1	0	0	MT								
MODEL	MT	A	B	C	D	E	F	L	W.P Weight	Max, R.P.M	Weight	Max, Run Out
041002	2	50	20	68	54	26	4	148	360	15,000	1,5	0,002
041003	3	50	20	85	54	26	4,5	165	360	15,000	1,8	0,002
041004	4	70	30	108	75	37	5,3	220	560	12,000	2,2	0,002
041005	5	70	30	136	75	37	6,3	248	560	12,000	5,2	0,002

Unit : mm, kg

BHSC-TYPE

FEATURES ;

- Accuracy guaranteed to 0,002mm TIR(0,0001").
- Excellent for grinders and CNC lathes.
- Heat-treated point to HRc 90±5.
- Three angular contact bearings for superior performance.
- Anti-friction seal for coolant deflectors and high speed.
- High RPM, up to 12,000.
- Heat-treated body for extra strength, rigidity and long life.
- Drain hole have to be located on bottom side.

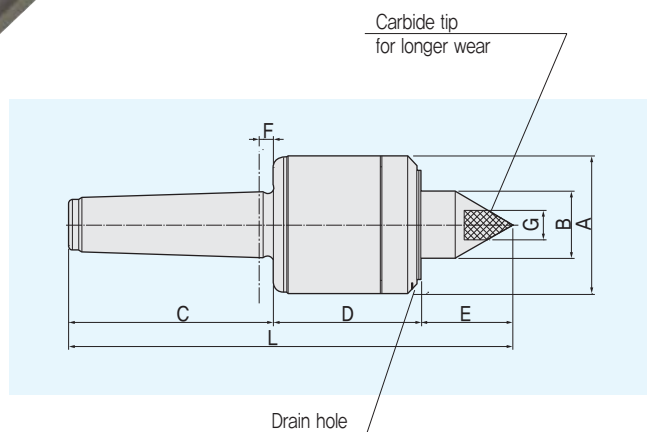



Dimension

04	2	0	0	MT									
					Unit : mm, kg								
MODEL	MT	A	B	C	D	E	F	G	L	W.P Weight	Max, R.P.M	Weight	Max, Run Out
042002	2	50	20	68	54	26	4	10	148	360	15,000	1,5	0,002
042003	3	50	20	85	54	26	4,5	10	165	360	15,000	1,8	0,002
042004	4	70	30	108	75	37	5,3	14	220	560	12,000	2,2	0,002
042005	5	70	30	136	75	37	6,3	18	248	560	12,000	5,2	0,002

BHSL30-TYPE

FEATURES ;

- Accuracy guaranteed to 0.002mm TIR(0.0001").
- Excellent for grinders and CNC lathes.
- Heat-treated point to HRC 60±2.
- Three angular contact bearings for superior performance.
- Anti-friction seal for coolant deflections and high speed.
- High RPM, up to 12,000.
- Heat-treated body for extra strength, rigidity and long life.
- Drain hole have to be located on bottom side.

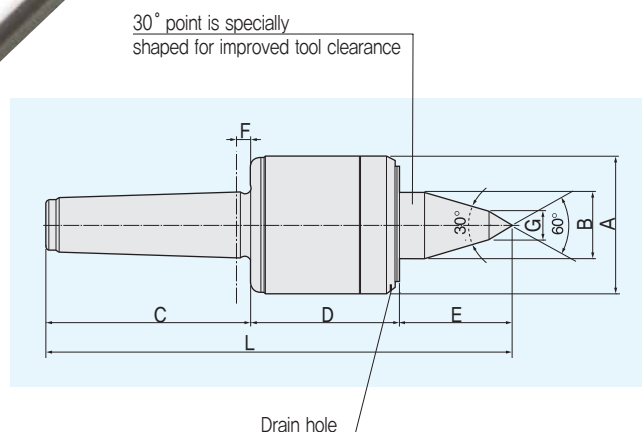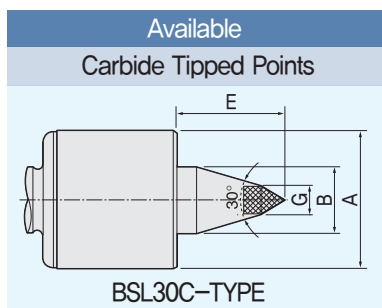

Dimension



04	2	0	0	MT									
MODEL	MT	A	B	C	D	E	F	G	L	W,P Weight	Max, R.P.M	Weight	Max, Run Out
043002	2	50	20	68	54	35	4	10	157	280	15,000	1.8	0.002
043003	3	50	20	85	54	35	4.5	12	174	280	15,000	1.8	0.002
043004	4	70	30	108	75	53	5.3	14	236	450	12,000	2.2	0.002
043005	5	70	30	136	75	53	6.3	18	264	450	12,000	5.2	0.002

Unit : mm, kg

BHSL30A-TYPE

FEATURES ;

- Accuracy guaranteed to 0.002mm TIR(0.0001").
- Excellent for grinders and CNC lathes.
- Heat-treated point to HRC 60±2.
- Three angular contact bearings for superior performance.
- Anti-friction seal for coolant deflections and high speed.
- High RPM, up to 12,000.
- Heat-treated body for extra strength, rigidity and long life.
- Drain hole have to be located on bottom side.

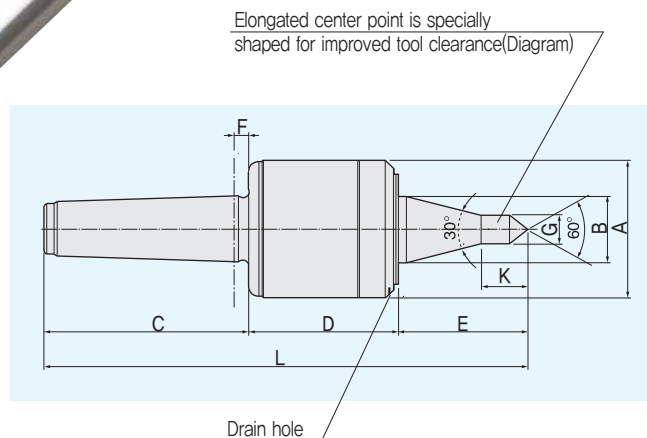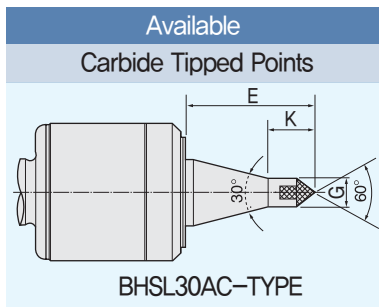

Dimension

04	5	0	0	MT											Unit : mm, kg	
MODEL	MT	A	B	C	D	E	F	G	K	L	W.P Weight	Max, R.P.M	Weight	Max, Run Out		
045002	2	50	20	68	54	45	4	10	19	167	250	15,000	1.8	0.002		
045003	3	50	20	85	54	45	4.5	10	19	184	250	15,000	1.8	0.002		
045004	4	70	30	108	75	63.5	5.3	12.5	23.5	246.5	390	12,000	2.2	0.002		
045005	5	70	30	136	75	63.5	6.3	12.5	23.5	274.5	390	12,000	5.2	0.002		