

Model SBP

Ultra Precision Portable Digital Pressure Gauge

Description

SBP Portable Digital Pressure Gauge, with advanced microprocessor technology and state-of-the-art pressure sensors, provide an accurate, reliable and economic solution for a wide range of pressure applications. This model combines precision and functionality in a compact, robust and simple-to-use package.

Features

- ▶ Unique and easy user interface
- ▶ Die casting body
- ▶ Measuring range 0~150MPa
- ▶ $\pm 0.025\%$ FS Accuracy, -10 to 50°C
- ▶ Large, easy to read display with 5 digits resolution
- ▶ 10 selectable pressure units
- ▶ RS232C communication, Analog Output
- ▶ Pressure Switch Test, Peak, Min./Max., Alarm functions

Applications

- ▶ Portable Field Calibration & Calibration Labs.
- ▶ Process monitoring & Control
- ▶ Over pressure Test & Explosion pressure Test
- ▶ Pressure Safety Valve(PSV) Test
- ▶ Valve & Regulator Test
- ▶ Chart Recorder Replacement
- ▶ Leak Test



Specifications

Range

0~15, 35, 100, 350, 700kPa, 2, 3.5, 7, 20, 35, 60, 70, 100, 150MPa(Gauge) (15, 35kPa Only Air)
-100kPa~100, 200, 350, 700kPa, 2, 3.5MPa(Gauge)
0~100, 200, 350, 700kPa, 2, 3.5, 7, 20, 35, 70MPa(Absolute)

Performance

Accuracy Gauge : $\pm 0.025\%$ FS ± 1 digit / Absolute : $\pm 0.05\%$ FS ± 1 digit
(Include Linearity, Hysteresis, Repeatability, Thermal Error)
Compensated Temperature Range -10~50°C
Operating Temperature Range -20~80°C


Electrical

Display ± 99999 Backlight LCD
Excitation AA Size Alkaline Battery $\times 3$ / External Power : 12~32VDC
Output Analog 0~5VDC, 1~5VDC, 4~20mA(Only External Excitation / Accuracy $\pm 0.1\%$ FS)
Digital RS232
Display Time 2 time/sec (on Peak function, 10 time/sec)
Function Peak, Switch Hold, Alarm, Data logging, Auto power off, Zero./Span Calibration, Auto Zero, Overpressure Alarm

Physical

Proof Pressure X1.5 or 150MPa, Whichever is less.
Burst Pressure X2 or 150MPa, Whichever is less.
Vibration 49.1m/s²{5G}, 10~500Hz
Shock 490m/s²{50G}
Pressure Port G(PF)1/4", NPT1/4"
Media-Wetted Materials SS316L, VITON or SS316L, Ti 87%
Weight Approx. 530g

Dimension

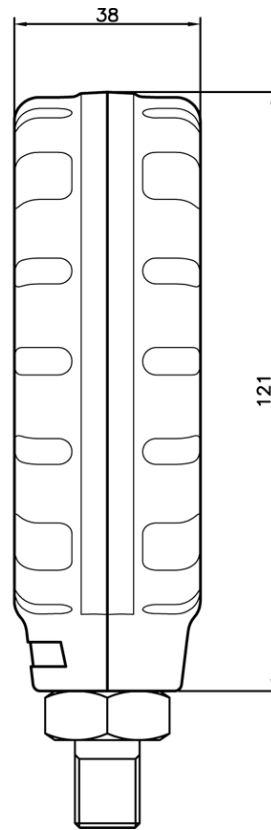

Pin No.	Connections
1	GND
2	RS232 Rx
3	RS232 Tx
4	Analog Out+
5	GND
6	Switch Hold
7	Alarm Out+
8	Power +
9	Power -

Ordering Information

