

ADD: 440-17 Cheong Cheon-Dong

Pu Pyung-Ku Inchon Korea

ACTUATOR For 3 Way Valve of Wall Hung Gas Boiler (STV-ACT-LM39-CL 75N)

PRODUCT SPECIFICATION SHEET



FEATURES

- . Higher torque than similar product
- . Smaller size than similar product
- . Selecting of response time
- . Reasonable price
- . High durability.

CONTENTS

Features	1
Application	
Specifications	
Dimensions	

APPLICATION

This product is suitable for the converting control of water flowing in all kinds of gas wall hung boilers SPECIFICATION

Model		STV-ACT-LM39-CL 75N
Torque		75N
Response time <depend on="" rpm=""></depend>		Low -> High : 5.5sec
		High -> Low : 4.5sec
Max Strocke		7.5mm
	Motor	Synchronous Motor, 3 RPM
Electrical of rating	Watt	3W
	Voltage	24VAC, 110VAC, 220VAC , 50/60Hz
Ambient temperature		-25 ~ 70 °C
Insulation		More than 500 MΩ (between electric wire and body by DC 500V Megger)
Withstand voltage		1,500VAC/1min (between electric wire and body)
Electrical connection		RAST 2.5
Weight		138.5g

www.shineui.co.kr shineui@shineui.co.kr



DIMENSIONS

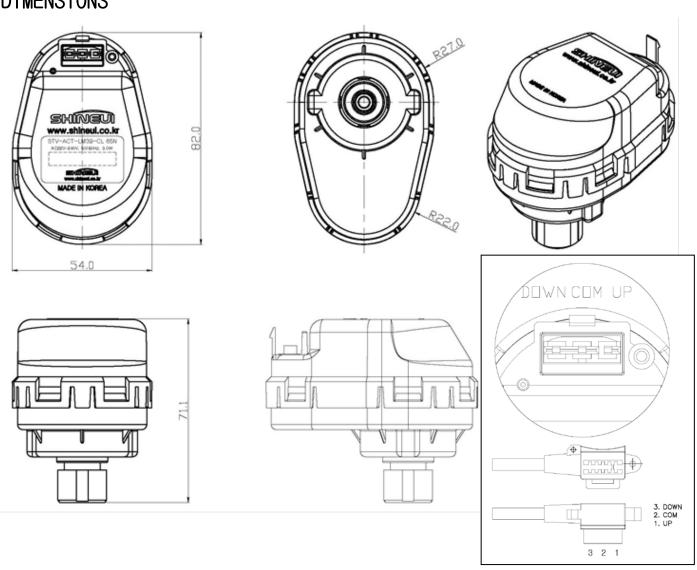


Fig 1. Actuator

The specifications and dimensions can be changed without warning