

# Super SeaPrince DST

## Compact Imaging Sonar



The Super SeaPrince DST is available in two configurations; single or dual port pressure housings. Using ARCNET communication the sonar can run alongside other Trittech products from the SeaKing range, as well as accepting inputs from third-party sensors and displaying all the data on one display.

Built to the highest quality standards and with a hard boot to protect the transducer, the Super SeaPrince is specifically designed for deployment in survey, observation and light work class ROV applications.

Operation can be achieved using the Trittech Surface Control Unit (SCU) or SeaHub connected to a computer via USB. For full ARCNET communication capability the sonar can be operated with the Trittech Surface Control Unit (SCU), or a PC with a Trittech SeaHub. When used in a stand-alone configuration the sonar can be run using RS232 or RS485 protocols.

Advanced CHIRP signal processing for clear and high resolution imagery.

The Super SeaPrince DST sets new standards in sonar technology, offering the same industry standard features as the Super SeaKing sonar, in a compact design. Broad band frequency response from 500kHz up to 900kHz, for maximum range and higher resolution in a single channel sonar.

### Benefits

- Compact and robust design
- Hard boot provides extra protection
- Wide bandwidth
- High resolution


### Features

- 4000m depth rating
- CHIRP sonar tuned to 675kHz
- True acoustic zoom
- Instant scan reversal
- ARCNET, RS232 and RS485

### Applications

- Survey and observation
- Light work-class ROV
- Obstacle avoidance
- Port and harbour surveillance

# Specification

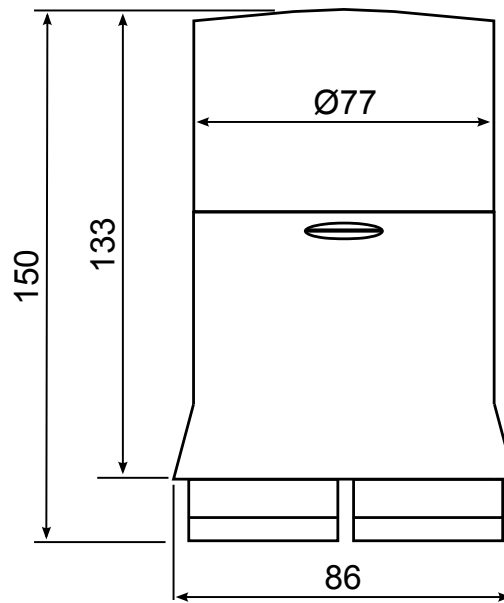

Not to scale, dimensions in mm.

Acoustic	
Operating frequency	Maximum bandwidth 500kHz to 900kHz (default of 675kHz)
Beamwidth	38° vertical, 2.3° horizontal
Maximum range	100m
Minimum range	1m
Resolution (step size)	0.45°, 0.9°, 1.8°, 3.6°
Pulse length	200µs
Electrical and Communications	
Power requirement	12 to 36V DC at 10VA (18 to 56V DC optional)
Supported protocols	ARCNET, RS232, RS485
Communication rate	ARCNET: 156kbit·s <sup>-1</sup> (maximum) RS232/RS485: 115.2kBd (maximum)
Physical	
Weight in air	1.05kg
Weight in water	0.44kg
Depth rating	4000m
Operating temperature	-10 to 35°C
Storage temperature	-20 to 50°C

Specifications subject to change according to a policy of continual development.

Document: 0374-SOM-00004, Issue: 02