


FERROUS METAL MANUAL DISCHARGE TYPE MAGNETIC SEPARATOR

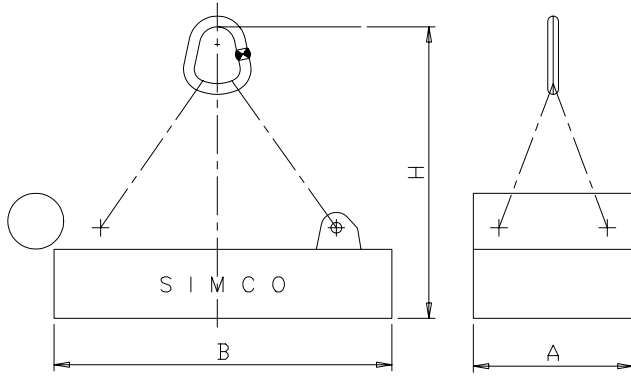


SB60 ~ SB100

*Purification of product or ingredient for higher quality end product by removing iron from material in process such as foundry sand, glass cullet, grain, food products, chemicals.

*Protection of processing equipment such as crushers, pulverizers, conveyor belts and screens from damage by removing tramp iron.

*Reclamation of either ferrous or non ferrous material from open hearth and blast furnace slag, incinerator and garbage plant products.

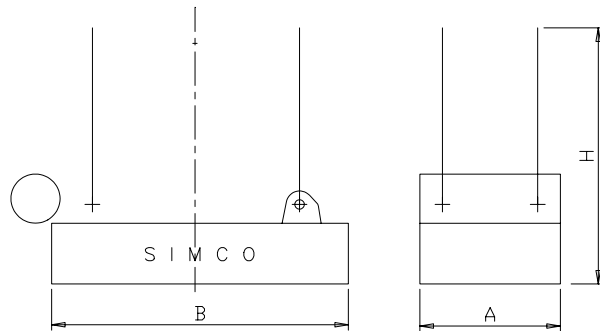

SB120 ~ SB210

Type	Belt width (mm)	Weight (kg)	Power (kw)	Voltage (vdc)	DIMENSION(mm)			WEIGHT
					A	B	H	Kg
SB-60	up to 600	700	2.0	110	600	800	1150	900
SB-80	up to 800	1,200	2.7	110	800	1000	1200	1250
SB-100	up to 1000	2,000	4.5	220	1000	1150	1400	2000
SB-120	up to 1200	3,300	5.5	220	1200	1300	1650	3500
SB-140	up to 1400	5,000	7.8	220	1400	1500	1800	5000
SB-160	up to 1600	6,700	10	220	1600	1750	1800	6450
SB-180	up to 1800	9,400	11.5	220	1800	2000	2150	9400
SB-210	up to 2100	13,400	17.2	220	2100	2300	2150	12000