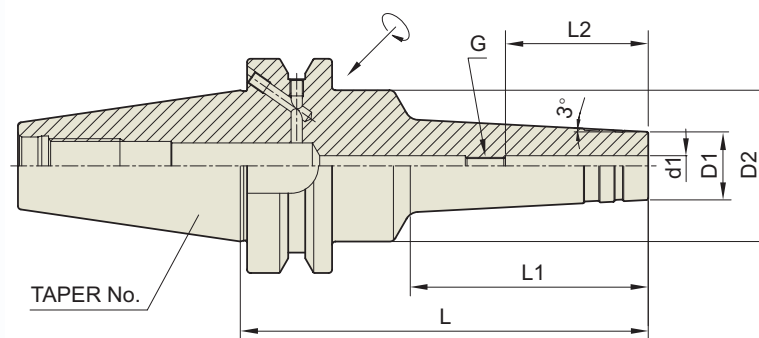


HYDRAULIC MOLD CHUCK

HMC

MAS403-BT FORM AD/B

MAS403
-BTTaper
Accuracy
AT3G Value
2.5RPM
20,000Coolant
System
AD/B


TAPER No.	CODE No.	d1	D1	D2	L	L1	L 2	G	Weight (kg)	Stock
40	BT40AD/B-HMC6-120	6	20	44.5	120	70	27	M5×0.8	1.40	
	BT40AD/B-HMC6-150	6	20	44.5	150	100	27	M5×0.8	1.65	
	BT40AD/B-HMC8-120	8	22	44.5	120	70	27	M6×1.0	1.40	
	BT40AD/B-HMC8-150	8	22	44.5	150	100	27	M6×1.0	1.65	
	BT40AD/B-HMC10-120	10	24	44.5	120	70	32	M8×1.0	1.40	
	BT40AD/B-HMC10-150	10	24	44.5	150	100	32	M8×1.0	1.65	
	BT40AD/B-HMC12-120	12	25	44.5	120	70	37	M10×1.0	1.40	
	BT40AD/B-HMC12-150	12	25	44.5	150	100	37	M10×1.0	1.65	
	BT40AD/B-HMC16-120	16	32	44.5	120	70	42	M12×1.0	1.45	
	BT40AD/B-HMC16-150	16	32	44.5	150	100	42	M12×1.0	1.70	
	BT40AD/B-HMC20-120	20	34	44	120	-	42	M16×1.0	1.50	
	BT40AD/B-HMC20-150	20	34	47	150	-	42	M16×1.0	1.80	
50	BT50AD/B-HMC6-150	6	20	50	150	90	27	M5×0.8	4.70	
	BT50AD/B-HMC8-150	8	22	50	150	90	27	M6×1.0	4.70	
	BT50AD/B-HMC10-150	10	24	50	150	90	32	M8×1.0	4.70	
	BT50AD/B-HMC12-150	12	25	37	150	-	37	M10×1.0	4.70	
	BT50AD/B-HMC16-150	16	32	44	150	-	42	M12×1.0	4.90	
	BT50AD/B-HMC20-150	20	34	46	150	-	42	M16×1.0	5.00	

► In case of BT50, balancing grade shall be guaranteed up to G2.5/15,000rpm.

► Higher balancing grade product up to G2.5/40,000(G6.3/100,000rpm) could be supplied by customer's request.

HYDRAULIC MOLD CHUCK

DIN69893-HSK FORM A

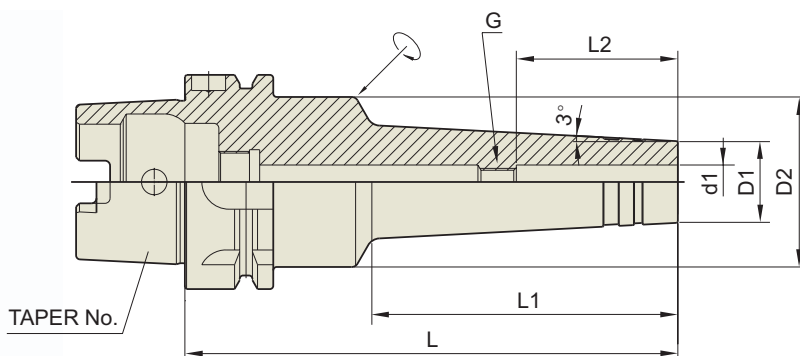DIN69893
- HSKTaper
Accuracy
AT3G Value
2.5RPM
20,000Coolant
System


TAPER No.	CODE No.	d1	D1	D2	L	L1	L 2	G	Weight (kg)	Stock
63A	HSK63A-HMC6-145	6	20	50	145	90	27	M5×0.8	1.40	
	HSK63A-HMC8-145	8	22	50	145	90	27	M6×1.0	1.40	
	HSK63A-HMC10-145	10	24	50	145	90	32	M8×1.0	1.40	
	HSK63A-HMC12-145	12	25	50	145	90	37	M10×1.0	1.40	
	HSK63A-HMC16-145	16	32	50	145	90	42	M12×1.0	1.45	
	HSK63A-HMC20-145	20	34	50	145	90	42	M16×1.0	1.50	
100A	HSK100A-HMC6-150	6	20	50	150	90	27	M5×0.8	4.50	
	HSK100A-HMC8-150	8	22	50	150	90	27	M6×1.0	4.50	
	HSK100A-HMC10-150	10	24	50	150	90	32	M8×1.0	4.50	
	HSK100A-HMC12-150	12	25	50	150	90	37	M10×1.0	4.50	
	HSK100A-HMC16-150	16	32	50	150	90	42	M12×1.0	4.70	
	HSK100A-HMC20-150	20	34	50	150	90	42	M16×1.0	5.00	

► In case of HSK100A, balancing grade shall be guaranteed up to G2.5/15,000rpm.

► Higher balancing grade product up to G2.5/40,000(G6.3/100,000rpm) could be supplied by customer's request.

HYDRAULIC MOLD CHUCK

DIN 69871-SK FORM AD/B

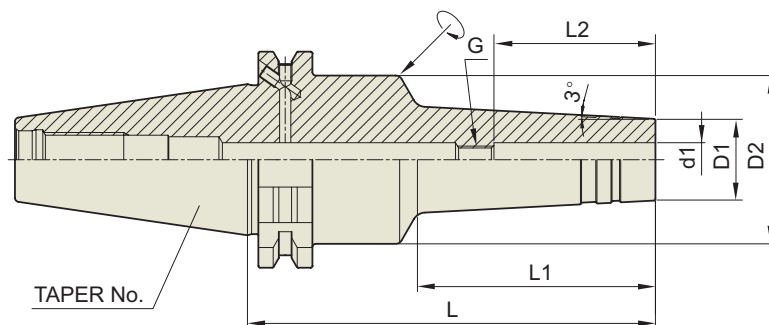

DIN 69871
- SK

Taper
Accuracy
AT3

G Value
2.5

RPM
20,000

Coolant
System
AD/B

TAPER No.	CODE No.	d1	D1	D2	L	L1	L 2	G	Weight (kg)	Stock
40	SK40AD/B-HMC6-120	6	20	49.5	120	70	27	M5×0.8	1.40	
	SK40AD/B-HMC6-150	6	20	49.5	150	100	27	M5×0.8	1.65	
	SK40AD/B-HMC8-120	8	22	49.5	120	70	27	M6×1.0	1.40	
	SK40AD/B-HMC8-150	8	22	49.5	150	100	27	M6×1.0	1.65	
	SK40AD/B-HMC10-120	10	24	49.5	120	70	32	M8×1.0	1.40	
	SK40AD/B-HMC10-150	10	24	49.5	150	100	32	M8×1.0	1.65	
	SK40AD/B-HMC12-120	12	25	49.5	120	70	37	M10×1.0	1.40	
	SK40AD/B-HMC12-150	12	25	49.5	150	100	37	M10×1.0	1.65	
	SK40AD/B-HMC16-120	16	32	49.5	120	70	42	M12×1.0	1.45	
	SK40AD/B-HMC16-150	16	32	49.5	150	100	42	M12×1.0	1.70	
	SK40AD/B-HMC20-120	20	34	49.5	120	70	42	M16×1.0	1.50	
	SK40AD/B-HMC20-150	20	34	49.5	150	100	42	M16×1.0	1.70	
50	SK50AD/B-HMC6-150	6	20	49.5	150	90	27	M5×0.8	4.50	
	SK50AD/B-HMC8-150	8	22	49.5	150	90	27	M6×1.0	4.50	
	SK50AD/B-HMC10-150	10	24	49.5	150	90	32	M8×1.0	4.50	
	SK50AD/B-HMC12-150	12	25	49.5	150	90	37	M10×1.0	4.50	
	SK50AD/B-HMC16-150	16	32	49.5	150	90	42	M12×1.0	4.70	
	SK50AD/B-HMC20-150	20	34	49.5	150	90	42	M16×1.0	5.00	

► In case of SK50, balancing grade shall be guaranteed up to G2.5/15,000rpm.

► Higher balancing grade product up to G2.5/40,000(G6.3/100,000rpm) could be supplied by customer's request.