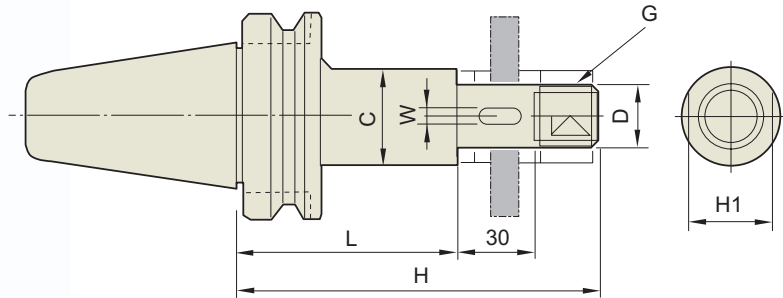


SIDE CUTTER ARBOR

MAS403-BT

MAS403
-BTTaper
Accuracy
AT3

G Value

RPM

Coolant
System

TAPER No.	CODE No.	H	H1	C	W	G	D	L	Weight (kg)	Stock
30	BT30-SCA12.7-60	105	17	20	—	M12	12.7	60	1.0	
	BT30-SCA15.875-60	106	23	26	3.18	M14	15.875	60	1.1	
	BT30-SCA22.225-60	110	29	34	3.18	M20	22.225	60	1.2	
	BT30-SCA25.4-60	115	32	40	6.35	M24	25.4	60	1.3	●
40	BT40-SCA12.7-75	120	17	20	—	M12	12.7	75	1.2	
	BT40-SCA12.7-105	150	17	20	—	M12	12.7	105	1.3	
	BT40-SCA15.875-75	121	23	26	3.18	M14	15.875	75	1.4	
	BT40-SCA15.875-120	151	23	26	3.18	M14	15.875	120	1.5	
	BT40-SCA22.225-75	126	29	34	3.18	M20	22.225	75	1.7	
	BT40-SCA22.225-120	171	29	34	3.18	M20	22.225	120	2.0	
	BT40-SCA25.4-75	130	32	40	6.35	M24	25.4	75	2.0	●
	BT40-SCA25.4-120	175	32	40	6.35	M24	25.4	120	2.4	●
	BT40-SCA31.75-90	150	41	46	7.92	M30	31.75	90	2.6	
	BT50-SCA12.7-75	120	17	20	—	M12	12.7	75	4.1	
50	BT50-SCA12.7-105	150	17	20	—	M12	12.7	105	4.2	
	BT50-SCA15.875-90	136	23	26	3.18	M14	15.875	90	4.2	
	BT50-SCA15.875-120	166	23	26	3.18	M14	15.875	120	4.2	
	BT50-SCA22.225-90	144	29	34	3.18	M20	22.225	90	4.4	
	BT50-SCA22.225-135	186	29	34	3.18	M20	22.225	135	4.7	
	BT50-SCA25.4-90	145	32	40	6.35	M24	25.4	90	4.5	
	BT50-SCA25.4-135	190	32	40	6.35	M24	25.4	135	4.9	●
	BT50-SCA31.75-90	150	41	46	7.92	M30	31.75	90	4.7	
	BT50-SCA31.75-135	195	41	46	7.92	M30	31.75	135	5.2	●
	BT50-SCA38.1-90	156	46	55	9.52	M36	38.1	90	4.9	
	BT50-SCA38.1-135	201	46	55	9.52	M36	38.1	135	5.9	