


# SNS TUNNELING FRONT

Sun and Shield

Application for Excavator

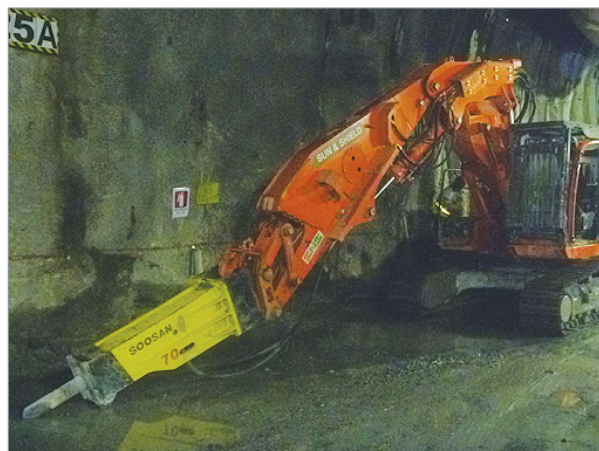

## • BOOM TILTING TYPE

### All packages come fully equipped with

- Base boom, tilt boom and arm.
- Tilt boom, arm, bucket cylinder and pins.
- Hydraulic piping for boom, arm.
- Lock valve piping for arm cylinder.

### Features

- Tilttable boom with 2 x 45° mounting.
- Well-protected hoses and pipes by heavy-duty covers.
- Lock valve & piping on boom and arm cylinder for safety.
- Compatible with standard boom and arm.

Excavator Attachment



SRF for DX140LCR



SRF for DX235LCR

## • SHORT REACH TYPE

### All packages come fully equipped with

- Boom and arm.
- Arm, bucket cylinder and pins.
- Hydraulic piping for arm, bucket.
- Bucket cylinder guard.

### Features

- Optimize for the narrow and limited height working condition by installed arm cylinder below from the boom.
- Hose & pipe are installed on the side so as to prevent damage from the ceiling.
- Bucket cylinder guard is installed to prevent damage in the narrow working condition.

Loader Attachment