

# TIMX-W215

## 21.5 Inch Marine Monitor

### GENERAL

This specification defines the descriptions for the TIMX-W215 TFT LCD Monitor. TIMX series is developed and designed for use in operator display such as Industrial and Marine applications.

### KEY FEATURES

- 21.5" Inch display, 16:9 / 1920 x 1080 Resolution
- Digital, DVI, RGB, Composite input
- Full Range Digital Dimming Control
- Picture in Picture (PIP)
- Capacitive touch OSD Control
- Dual/Multi Power Supplies (AD&DC)
- Projected Capacitive Touch Screen - Option
- RS-232/422/485 Communication - Option
- Internal Buzzer Control - Option
- VESA, Flush, Stand Mounting




### GENERAL FEATURE


Section	Specifications
TFT Technology	Active Matrix Liquid Crystal Display Amorphous TFT (Thin Film Transistor) Anti-Glare & Anti-Reflective LED Backlight Technology
Viewable Size	21.5 inch diagonal
Active Area	476.64mm (H) x 268.11mm (V)
Resolution	1920 x 1080
Pixel Pitch	0.24825 (H) x 0.24825 (V)
Aspect Ratio	16:9
Response Time	18ms
Brightness	300cd/m <sup>2</sup>
Contrast Ratio	1500:1
Viewable Angle	89°/89°/89°/89° (Right/Left/Up/Down)
Max Colors	16.7Million True Color
Synchronization Range	31~80KHz (Horizontal) 55~76Hz (Vertical)
Optimal Resolution	1920 x 1080 @60Hz
Detectable Resolution	640 x 480, 800 x 600, 1024 x 768, 1280 x 1024, 1920 x 1080
Input Signal	1 x DIGITAL, 1 x DVI, 1 x RGB, 2 x Composite, 1 x RS232, 1 x RS-422/485 (Euro Terminal Block)
Power Specification	100~230VAC 50/60Hz (IEC Standard Type) & DC24V (Terminal Block)
Power Consumption	35W (MAX)
Product Dimension	540mm (W) x 70mm (D) x 370mm (H)
Weight	9.2kg
Operation Conditions	Temperature : -15°C to +55°C Humidity : up to 95%
Storage Conditions	Temperature : -20°C to +60°C Humidity : up to 95%
Options	Projected Capacitive Touch Screen, Anti Glare Glass, Optical Bonding, Sunlight Readable/High Brightness, RS-232/422/485, Buzzer, Composite Video
Test Approval	IEC 60945 4th, IACS E-10, IEC 60529
IP-Rating	IP65 Front
Certification	DNV GL

# MARINE LCD MONITOR

## TIMX-W215

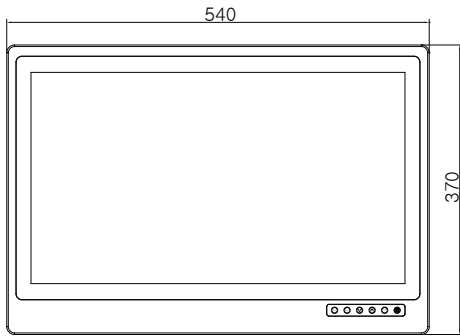


FRONT VIEW




SIDE VIEW



BOTTOM VIEW

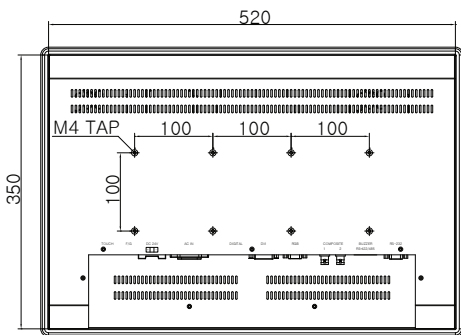

REAR VIEW

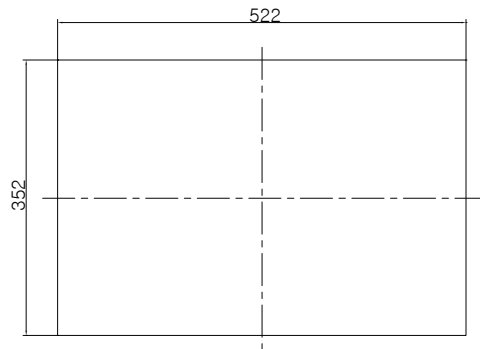

PANEL CUTTING

### Tetradyne Co., LTD.

#604/605, E&C VENTURE DREAM TOWER II, 55,  
DIGITAL-RO 33-GIL, GURO-GU, SEOUL, 08376, REP KOREA

Tel : +82-2-323-4972

E-mail : [sales@tetradyne.co.kr](mailto:sales@tetradyne.co.kr)

Web site : [www.tetradyne.co.kr](http://www.tetradyne.co.kr)

Contact Point

Specifications and features are subject to change without notice.

All products names are trademarks or registered trademarks of Tetradyne.co.,Ltd.