

Manual 2 - Way Valves

High Pressure type

How to Order

MP2 - □ **TF** - □ □

Valve Size	End Connection	Tube Standard
8 ... 1/4"	F ... Flowell 20series	A ... metric
10 ... 3/8"	R ... Flowell 60series	B ... inch
15 ... 1/2"	P ... Pillar Super fittings	
20 ... 3/4"	S ... Pillar Super 300	
25 ... 1"	K ... Kurabo Finallock	
	T ... Tube type	

特注品も製作いたします。特別仕様の場合はお問い合わせ下さい。
Special orders are acceptable. Consult us about specific applications.


Specifications

Fluid	Chemicals and DI Water
Fluid temperature range	10~100
Fluid pressure range	Inlet Outlet : 0~0.5Mpa
	Back pressure : 0~0.5MPa
Operating system	Manual type
Atmospheric temperature	0~40
Materials of wetted parts	Diaphragm : PTFE
	Body : PTFE

全ての仕様は参考値です。

All specifications are for reference only.

Structural drawing

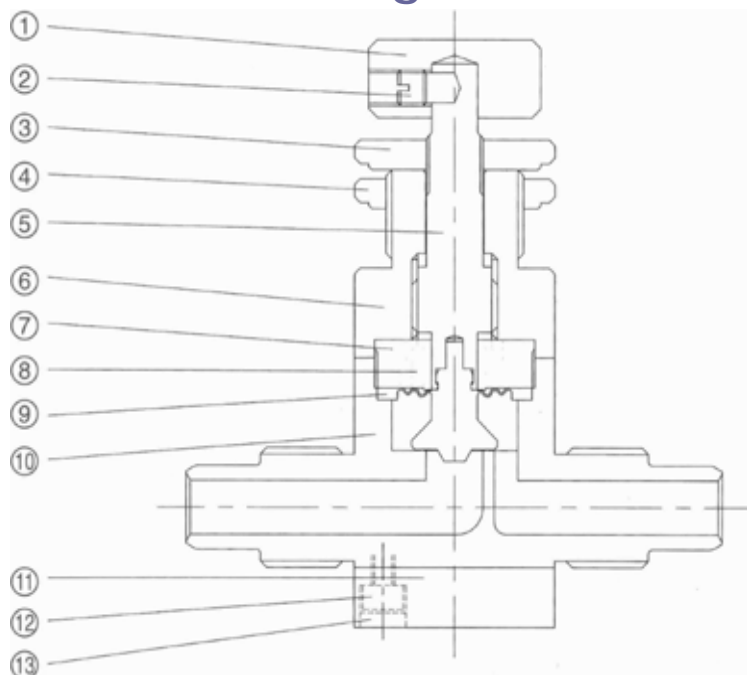

Materials of Construction

No.	Parts	Materials	Notes
	Handle	PP	
	Screw	PCTFE	
	Lock nut	PP	
	Panel nut	PP	
	Shaft	PP	
	Case	PP	
	Diaphragm weight	PP	
	Absorber-ring	PP	Patent
	Diaphragm	PTFE	
	Body	PTFE	
	Base	PP	
	Bolt	304SS	
	Cap	PTFE	

304SS=SUS304