

LED Security Light 40W, 50W 60W, 70W

A Worldwide Leading Technology Company
Provides the High Customer Value



PATENT



PERFORMANCE CERTIFICATION




GOVERNMENT EXCELLENT PRODUCT



KOREAN STANDARD




HIGH EFFICIENCY DEVICE

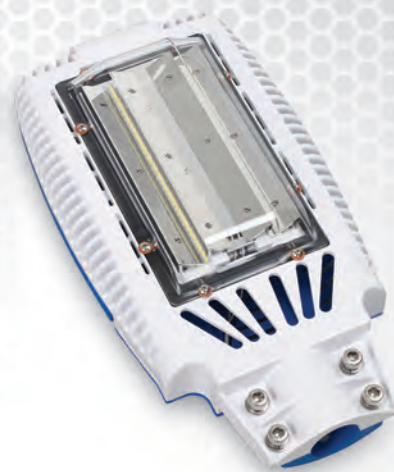

Specifications

Model	Specification	
Body Material	Aluminum Alloy	
Dimension	454 x 238 x 105.5mm	
Waterproof	IP65	
Input Voltage	AC100~220V, 50/60Hz	
Efficiency	≥ 95 lm/W	
Mass	≤ 5kg	
Model	Model	W
	UNILSL-40	40
	UNILSL-50	50
	UNILSL-60	60
	UNILSL-70	70
CRI	>75	
Total Flux	40W	≥3,800 lm
	50W	≥4,750 lm
	60W	≥5,700 lm
	70W	≥6,650 lm

Beam Distribution

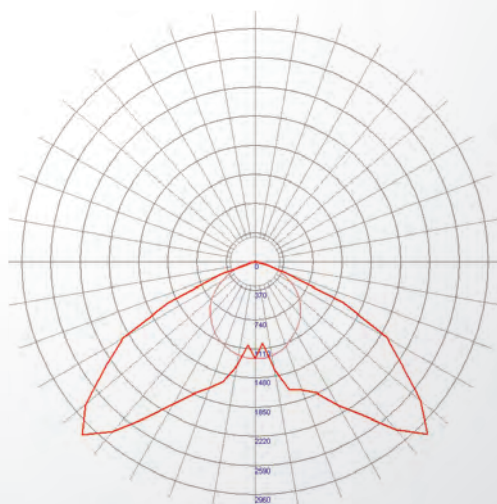



LED Security Light 40W, 50W, 60W, 70W

Feature





Eliminate the distribution control by Diffusion Lens

Improve the directivity of Luminous Element

Effective Control the diffusion level of Light

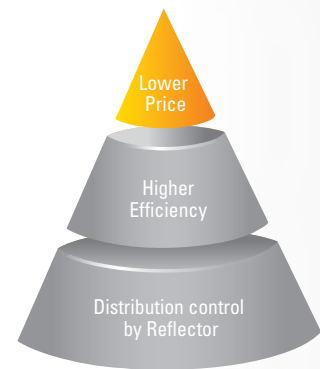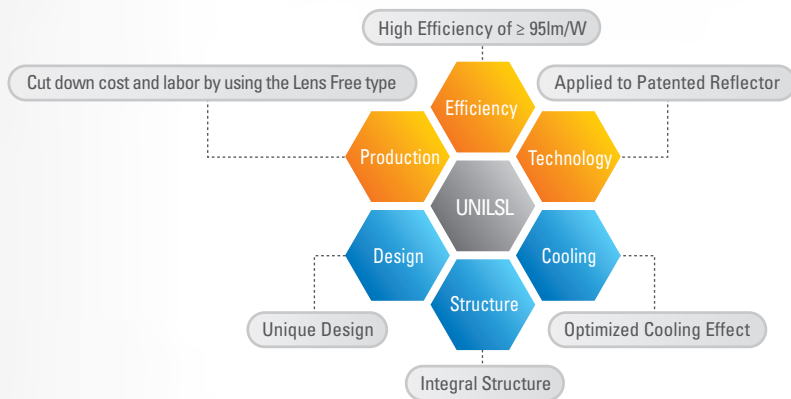

Reflector Technology enabled Diversity Beam Distribution Realization

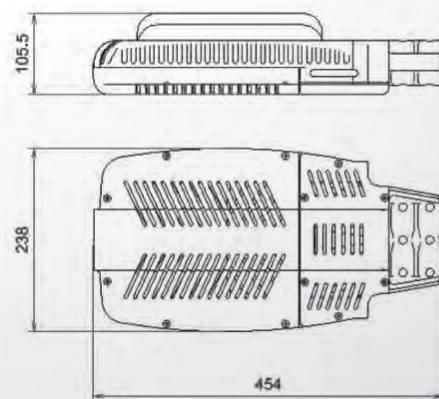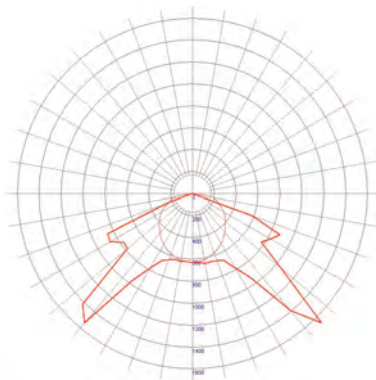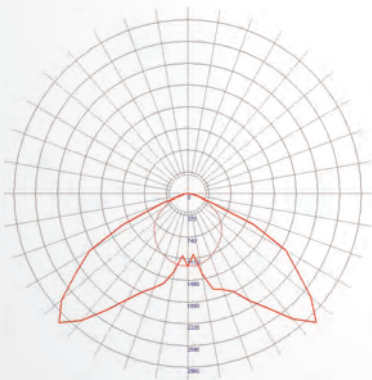

UniTest

#155-1, Hagal-Dong, Giheung-Gu, Yongin-City, Gyeonggi-Do, 446-930
TEL. 82. 31. 205. 6111 FAX. 82.31. 287. 5686 A/S Call Center 82. 31. 547. 0300 [Ext.9]
www.solargate.co.kr www.uni-test.com