


Converter 40W, 45W, 50W

A Worldwide Leading Technology Company
Provides the High Customer Value



Feature

- Output 2 Channels Separation Type
- Constant Current Type
- SHORT CIRCUIT PROTECTIONS,
OVER VOLTAGE PROTECTIONS,
OVERLOAD PROTECTIONS

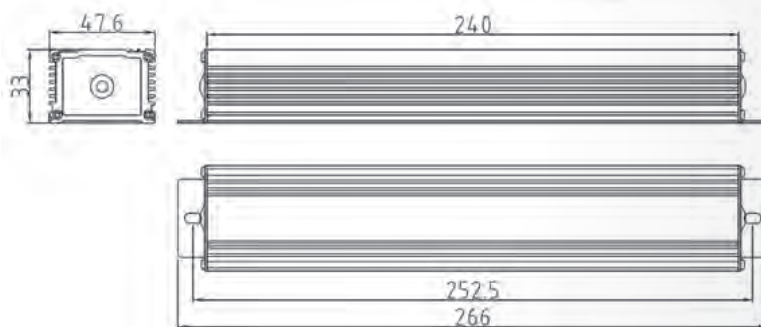

Specifications

Model	Rated Power	Power Consumption	Output Voltage	Output Current	Power Factor	THD	Efficiency	Weight
UT-2F5040-K	AC100-220V 50/60Hz	50W	DC36V	1.2A	Over 0.9	Below 25%	Over 85%	0.8kg
UT-2F4540-K		45W		1.08A				
UT-2F4040-K		40W		0.97A				
UT-2F5024-K		50W	DC24V	1.8A				
UT-2F4524-K		45W		1.65A				
UT-2F4024-K		40W		1.45A				

UniTest

#155-1, Hagal-Dong, Giheung-Gu, Yongin-City, Gyeonggi-Do, 446-930
TEL. 82. 31. 205. 6111 FAX. 82.31. 547. 0389
www.solargate.co.kr www.uni-test.com