

Product Features

- Prevents noise and vibration caused by stress generated by expansion and shrinkage of vertical pipe.
- Suitable for isolating structure borne noise caused by flow-induced vibration and noise.
- Install reinforced vertical limit stop for top/bottom housing not to be broken or separated by excessive tensile load when rising pipe expands.
- Heavy-duty design withstand more than 1.0G of accelerated force in all direction.


Product Usage

- Risier pipe
- Other horizontal pipe

Product Specification

| Model | Dimensions (mm) | | | | | Max G-Rating |
|----------|------------------|-----------------|-----|-----|--------------------------|---------------------------------|
| | Rated Cap. (kgf) | Rated Def. (mm) | A | H | Steel Plate (Dia. × thk) | |
| SVAG-75 | 200 | 2.8 | 75 | 114 | 50 × 5 | 1G All Directional Load Ratings |
| SVAG-200 | 1300 | 6.0 | 100 | 145 | 65 × 8 | |
| SVAG-350 | 5400 | 6.4 | 150 | 178 | 100 × 12 | |
| SVAG-600 | 13600 | 6.9 | 250 | 280 | 160 × 15 | |
| SVAG-800 | 22700 | 6.9 | 300 | 345 | 200 × 15 | |

Engineering Data

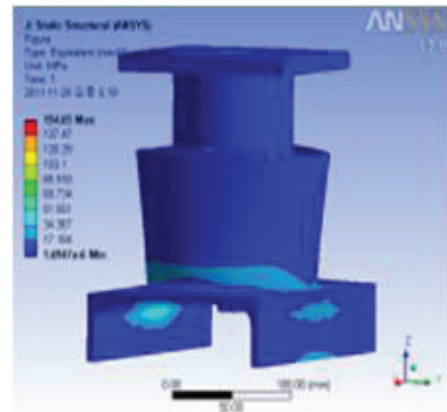

※ Shape and specifications of the products can be changed without prior notice for quality and performance improvement.